



INFORMATION AND COMMUNICATION TECHNOLOGIES

COORDINATION AND SUPPORT ACTION

EUROSOI+

European Platform for Low-Power Applications on Silicon-On-Insulator Technology

Grant Agreement n° 216373

D5.5: Updated version of Research-dedicated Design Kit (RDK) documentation

Due date of deliverable: 28-02-2010
Actual submission date: 28-02-2010

Start date of project: 01-01-2008

Duration: 39 months

Project coordinator: Prof. Francisco Gámiz, UGR

Project coordinator organisation: University of Granada, Spain

Rev.1

Project co-funded by the European Commission within the Seventh Framework Programme (FP7)		
Dissemination Level		
PU	Public	X
PP	Restricted to other programme participants (including the Commission Services)	
RE	Restricted to a group specified by the consortium (including the Commission Services)	
CO	Confidential, only for members of the consortium (including the Commission Services)	



FDSOI PDK LETI Reference Manual

Table of contents

1 Introduction.....	3
2 Configuration guide.....	4
2.1) PDK installation instructions.....	4
2.2) PDK user setup.....	4
3 The PDK architecture	7
3.1) PDK directory structure overview.....	7
3.2) Detailed directory structure	8
3.3) Reference libraries.....	8
3.4) Analog design flow.....	9
4 FDSOI technology package information.....	10
4.1) General definitions.....	10
4.2) FDSOI device models.....	11
4.2.1) NMOSFD transistor.....	11
4.2.2) PMOSFD transistor.....	12
4.3) Pcells MOS	13
4.3.1) Standard Pcell.....	13
4.3.2) Test structure Pcell.....	14
4.3.3) Body contacted MOSFET Pcell.....	16
4.3.4) Gated diodes Pcell.....	17
4.3.5) Scribe 22 pads Pcell.....	18
4.4) FDSOI Contact	19
4.5) Eldo module.....	20
4.6) Calibre module.....	21
4.6.1) Calibre DRC.....	21
4.6.2) Calibre LVS.....	22
4.6.3) Calibre Dummies generation.....	23
4.6.3.1) First pass	23
4.6.3.2) Second pass	24
5 PDK tree	26
 ANNEXES.....	 31

1 Introduction

The purpose of this document is to give the end user an installation guide for the FDSOI Process Design Kit (PDK). It explains the PDK architecture and points out specific details of the FDSOI LETI information.

Section (2) “Configuration guide” contains installation instructions for the PDK administrator and user setup instructions. It describes how to setup the PDK in the customer design environment and basic checks that are necessary to work consistently with the PDK.

Section (3) “PDK architecture” gives an overview about the architecture of the PDK, reference libraries and the supported analog design flow.

Section (4) “FDSOI technology package information” gives detailed information about FDSOI technology; technology library, devices, Pcells , Eldo simulation models, and physical verification with Calibre.

Here is a list of recommended Cadence tools to be used with the PDK:

- ✓ Cadence : 5.10.41.500.6.131,
- ✓ Adms : 2008.2a,
- ✓ Calibre : 2008.1_20.15

Following platforms/operating systems are supported:

- ✓ Solaris 2.8
- ✓ Linux Red Hat Enterprise 4.0

2 Configuration guide

2.1) PDK installation instructions

For the first installation of the KIT, create a directory:

ex: mkdir <your path>/DKIT_FDSOI

Copy into this directory the next files:

- DK_LETI_FDSOI_<version>.tar.gz,
- pdk_leti_install,
- readme.

Change directory : cd /<your path>/DKIT_FDSOI

Change permission: chmod 555 ./pdk_leti_install

Execute the script: ./pdk_leti_install DK_LETI_FDSOI_<version>.tar.gz

After unpacking the PDK, following PDK base directory structure is visible. (See section (3) for more details about the complete PDK directory structure).

The PDK base structure:

```
<Install_Path>
|----bin/      (Binary directory)
|----cad/      (PDK infrastructure directory)
|----cdsuser/  (User setup template directory)
|----doc /     (Document directory)
`----tech/    (Technology directory)
```

2.2) PDK user setup

To setup the user UNIX environment some UNIX variables have to be set and some files have to be installed in the user directory. PDK “cdsuser” directory contains template files illustrating required setup:

Required UNIX variables:

- ✓ PDK_ROOT points to the installation directory of the PDK
- ✓ CSDIR points to installation directory of Cadence Design Framework
- ✓ MGC_AMS_HOME points to installation directory of ADMS (Eldo)
- ✓ MGC_HOME points to the installation directory of Calibre
- ✓ PATH points to the bin directory
- ✓ CDS_Netlisting_Mode sets to Analog.

cdsuser directory structure:

```
<PDK_ROOT>
  \-----cdsuser/
    |-----.artist_states
    |-----.cdsinit
    |-----simrc
    |-----cds.lib
    |-----cdsuser_file.tar
    \-----simulation
```

- ✓ User .artist_states directory, which will contain states of Analog Design Environment
- ✓ User .cdsinit file, which is just a call to \$PDK_ROOT/cad/.cdsinit
- ✓ User cds.lib file includes just inclusions of \$PDK_ROOT/tech/tools/dfII/tech.lib and analogLib for Eldo. The files define available libraries in the Library Manager
- ✓ User simulation directory, which will contain results simulations with Eldo
- ✓ cdsuser_file.tar tar file contains all files above:

At project startup, the user can execute the script *pdk_leti_install_user* (\$PDK_ROOT/bin) which installs all these files.

\$PDK_ROOT/cdsuser/cds.lib:

```
-- Library techno
SOFTINCLUDE $PDK_ROOT/tech/tools/dfII/tech.lib

-- AnalogLib for Eldo
SOFTINCLUDE $MGC_AMS_HOME/etc/cds/cds.lib
```

Content of the tech.lib file:

```
DEFINE DK_fdsoi45Lib $PDK_ROOT/tech/tools/dfII/cdb/DK_fdsoi45Lib
```

This file defines technology dependent library. This library are part of the PDK installation. Library is located in the \$PDK_ROOT/tech/tools/dfII/cdb directory.

DK_fdsoi45Lib library contains the technology data (Devices, Pcell, Contacts)

Content of the cds.lib file of Eldo:

```
DEFINE analogLib          $MGC_AMS_HOME/data/cdslib/510/analogLib
DEFINE mgcLib             $MGC_AMS_HOME/data/cdslib/510/mgcLib
DEFINE basic              $MGC_AMS_HOME/data/cdslib/510/basic
DEFINE aamix              $MGC_AMS_HOME/examples/artist_link/cdslib/CDB/aamix
DEFINE aatest             $MGC_AMS_HOME/examples/artist_link/cdslib/CDB/aatest
DEFINE CommLib           $MGC_AMS_HOME/data/cdslib/CommLib
DEFINE CommLibQS         $MGC_AMS_HOME/data/cdslib/CommLibQS
DEFINE CommLibRF         $MGC_AMS_HOME/data/cdslib/CommLibRF
```

\$PDK_ROOT/cad/.cdsinit:

This is the initialization file of the Cadence software. The environment is initialized in the following order:

- ✓ Load Artist Link Skill customisation located under \$MGC_AMS_HOME/etc/cds/.cdsinit
- ✓ Load .cdsenv file located under \$PDK_ROOT/cad
- ✓ Load of DFII Display Resource File (DRF) display.drf file located under \$PDK_ROOT/tech/tools/dfii folder
- ✓ Set the default simulator in Analog Design Environment to EldoD and insert the Model Library file
- ✓ Variables declaration for Calibre DRC/LVS:

```
PDK_CALIBRE_LVS_DECK=$PDK_ROOT/tech/tools/calibre/fdsoi45.calibreUvs  
PDK_CALIBRE_DRC_DECK=$PDK_ROOT/tech/tools/calibre/fdsoi45.calibreDRC  
PDK_CALIBRE_DUM_DECK=$PDK_ROOT/tech/tools/calibre/fdsoi45.calibreDUM  
MGC_CALIBRE_LVS_RUNSET_FILE=$PDK_ROOT/tech/tools/calibre/fdsoi45.runsetUvs  
MGC_CALIBRE_DRC_RUNSET_FILE=$PDK_ROOT/tech/tools/calibre/fdsoi45.runsetDRC  
MGC_CALIBRE_DRC_RUNSET_LIST=$PDK_ROOT/tech/tools/calibre/fdsoi45.runsetFile  
MGC_CALIBRE_DUM_SWITCH_FILE=$PDK_ROOT/tech/tools/calibre/calibreI_dum_switchdef
```

- ✓ Load Skill customization for Virtuoso Layout Environment:

```
BindKeys : $PDK_ROOT/tech/il/fdsoiBK.il  
GuardRing : $PDK_ROOT/tech/il/fdsoiGR.il
```

3 The PDK architecture

3.1) PDK directory structure overview

The Process Design Kit (PDK) is standalone without any assumptions on the target design environment.

```
<Install_Path>
|----bin/      (Binary directory)
|----cad/      (PDK infrastructure directory)
|----cdsuser/  (User setup directory)
|----doc/      (Document directory)
`----tech/     (Technology specific directory)
```

The design kit is accessible with UNIX environment variable “PDK_ROOT” pointing to the PDK installation directory.

cdsuser directory contains the user setup template files. At project startup, the user must execute the script *pdk_leti_install_user* (\$PDK_ROOT/bin) which installs all initialisation files.


cad directory contains process technology independent data. Installed routines and data are only tool dependent and can be used for more than one technology.

tech directory contains process technology dependent data. It contains DFII libraries, tool specific data (Calibre files, Eldo models, etc), and technology specific SKILL routines.

doc directory contains documents of pdk: Design Rules Manual and Releases Notes.

3.2) Detailed directory structure

The entire PDK directory structure looks like the following:

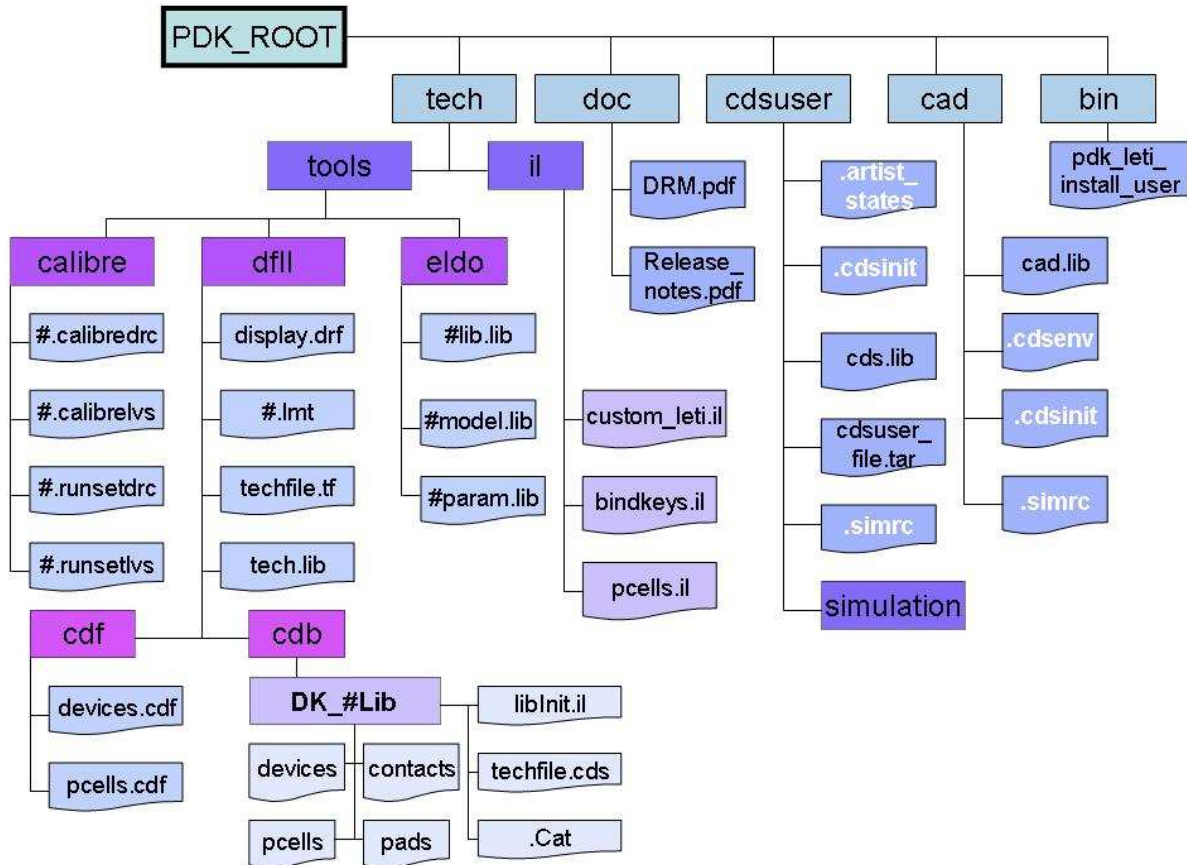

3.3) Reference library


The PDK reference library *DK_fdsoi45Lib* contains the technology data:

- Devices symbol : nmosfd & pmosfd
- Pcell MOS :
 - + pc_std_mos (standard pcell for multifinger mosfet)
 - + pc_chnl_mos (standard pcell for multichannel mosfet)
 - + pc_dnp_mos (Gated Diode pcell)
 - + pc_body_mos (Body Contacted pcell)
 - + pc_scribe_22pads (Scribe packaging pcell)
- Contacts

3.4) Analog design flow

The PDK is supposed to the standard Cadence analog design flow based on a unified integration within DFII. Such an analog flow contains the following tools:

- o Design Framework (5.1.41)
- o Calibre (2008.1)
- o Adms/Eldo (2008.2a)

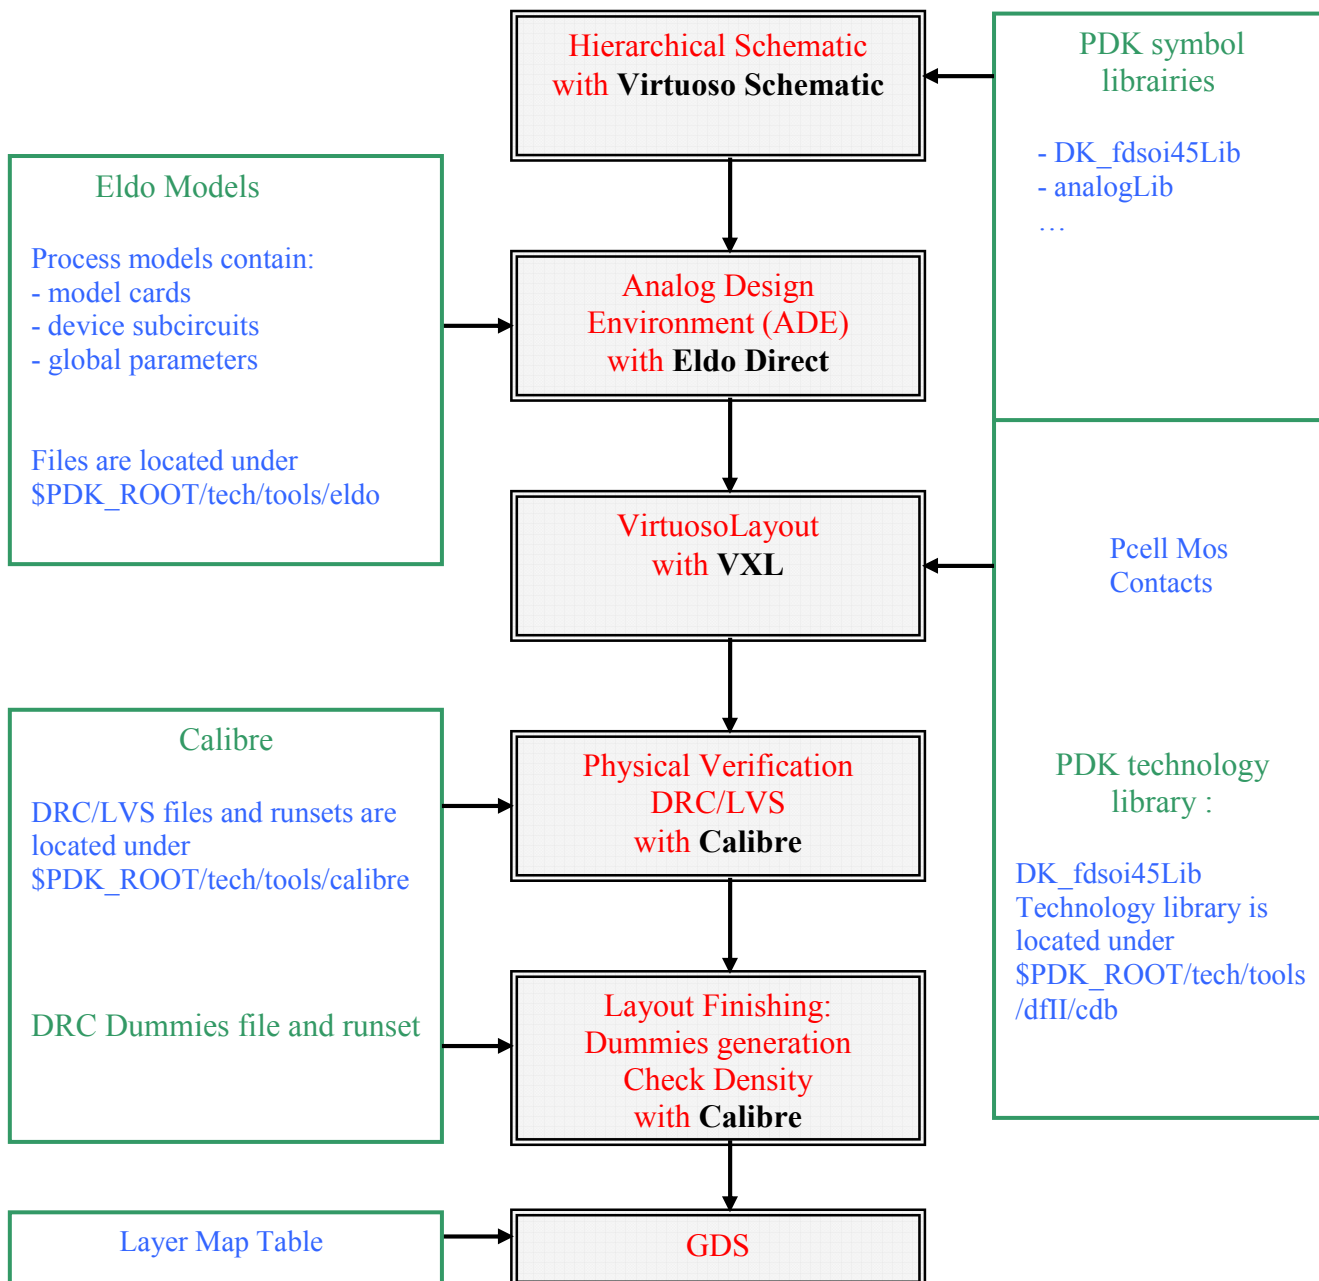


4 FDSOI45 technology package information

4.1) General definitions


FDSOI45 technology allows a design using 2 metal layers.

There are 2 Devices nmosfd & pmosfd. The “Back End” description is detailed below (for more information see “Design Rules Manual” under \$PDK_ROOT/doc directory):

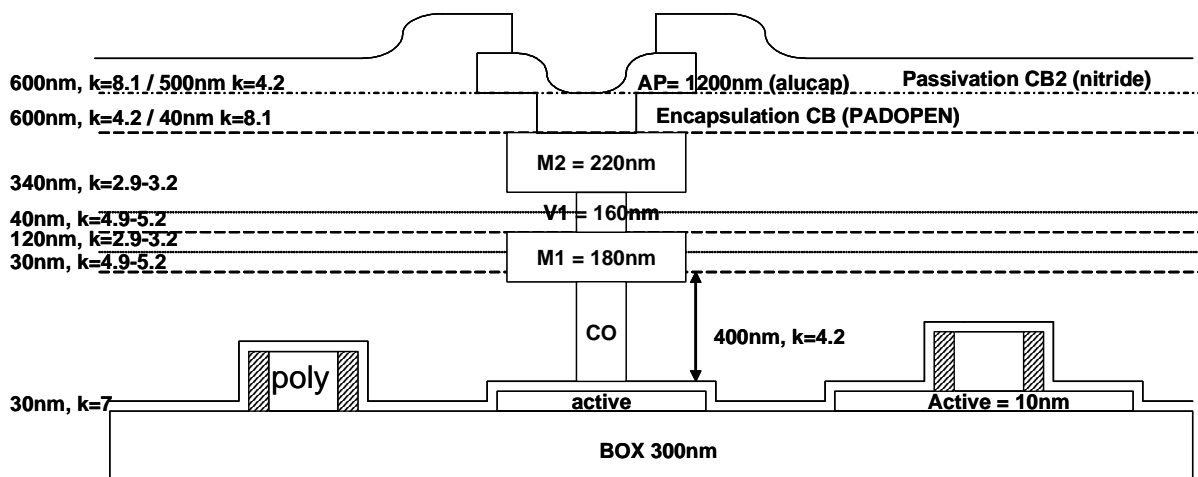

Back End description

The default pad structure is a metal1/metal2 stack, the layers of metal are connected together by via1.

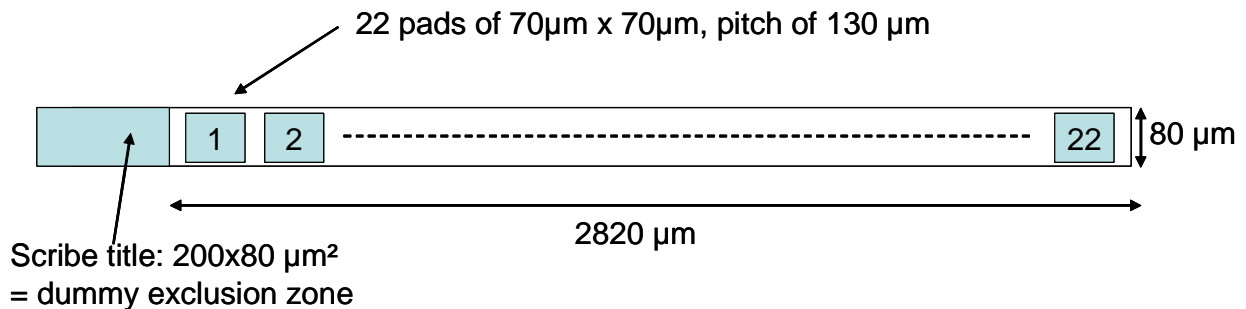

Scribe 22 pads description

If required, pads can be designed also at the active or poly level, with the same pattern as the metal1 one. When this option is activated, a choice between active and poly levels is made for each pad of the 22 pads structure.

In that case, the designed device is connected to the pad at the lowest level (active or poly) and the connection is stacked to the metal1 level (no contact matrix in the pad).

List of layers

Level	Layer #
ACTIVE	02
VTN	60
VTP	43
GO2	06
POLY1	13
POLY2	42
DSN	16
DSP	17
CONTACT	19
METAL1	23
VIA1	25
METAL2	27
PADOPEN	40
ALUCAP	41
NITRIDE	31

LSW



Purpose:



- dg : drawing
- pn : pin (for Calibre LVS)
- de : dummy exclude (exclude zone for ACTIVE/POLY and/or METAL)
- te : tile (dummy generation) → non visible by default in the LSW

Note: Layer MARKER is used to define zone where no DRC will be execute.

4.2) FDSOI device models


There are 2 devices in the FDSOI45 technology. Each component is an associated model for Eldo simulator and a layout parameterised cell (Pcell Standard).

4.2.1) NMOSFD transistor

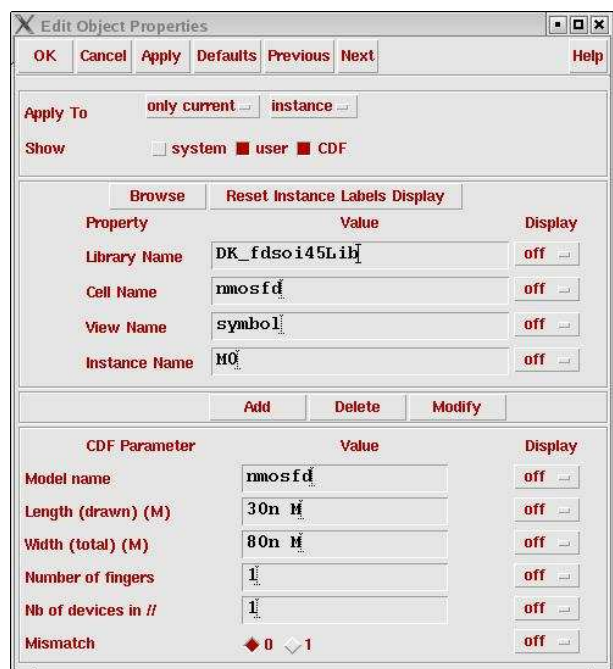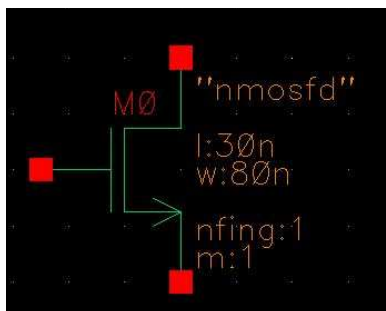

CDF parameter	Description	Default
Model name	Device model	nmosfd
Length (drawn) (M)	Length of the transistor (l)	30n
Width (total) (M)	Width of the transistor (w) This value corresponds to Weffective x Number of fingers	80n
Number of fingers	Number of fingers (n fing)	1
Nb of devices in //	Number of devices nmosfd in parallel (m)	1
Mismatch	Flag for mismatch simulation	0

4.2.2) PMOSFD transistor

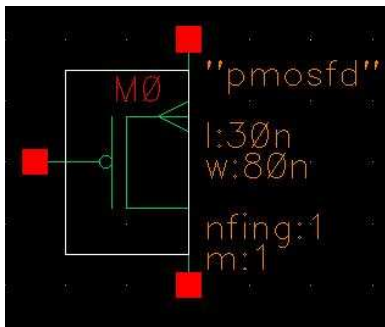

X Edit Object Properties
OK Cancel Apply Defaults Previous Next Help

Apply To only current instance
 Show system user CDF

Browse Reset Instance Labels Display

Property	Value	Display
Library Name	DK_fdsoi45Lib	off
Cell Name	pmosfd	off
View Name	symbol	off
Instance Name	M0	off

Add Delete Modify

CDF Parameter	Value	Display
Model name	pmosfd	off
Length (drawn) (M)	30n	off
Width (total) (M)	80n	off
Number of fingers	1	off
Nb of devices in //	1	off
Mismatch	<input checked="" type="checkbox"/> 0 <input type="checkbox"/> 1	off



CDF parameter	Description	Default
Model name	Device model	pmosfd
Length (drawn) (M)	Length of the transistor (l)	30n
Width (total) (M)	Width of the transistor (w) This value corresponds to Weffective x Number of fingers	80n
Number of fingers	Number of fingers (n fing)	1
Nb of devices in //	Number of devices pmosfd in parallel (m)	1
Mismatch		0

4.3) FDSOI Pcell mos

All Pcells are accessible through the Pcells category into the reference library DK_fdsoi45Lib.

4.3.1) Standard Pcell

The standard pcell “pc_std_mos” corresponds to standard multifinger mosfet. Only one pcell is used for the two devices (nmosfd & pmosfd).

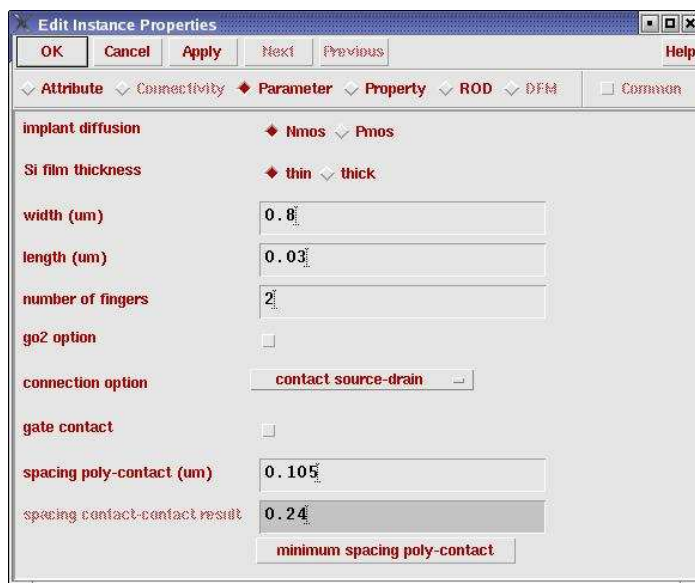
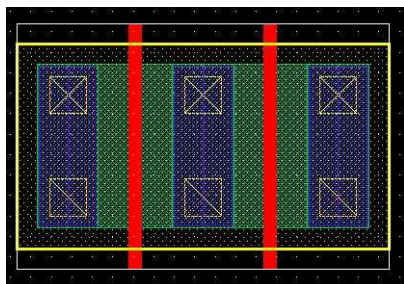


CDF parameter	Description	Default
implant diffusion	Choice of the diffusion type Choices "Nmos" / "Pmos" <i>Info: Nmos => DSN / Pmos => DSP</i>	Nmos
Si film thickness	Choice of the Si film thickness choices "thin" / "thick" <i>Info: thin <=> VTN / thick <=> VTP</i> <i>Choice of implant diffusion, generate the standard Si film thickness as default</i> <i>=> standard Nmos, "Nmos" and "thin"</i> <i>=> standard Pmos, "Pmos" and "thick"</i> <u>Important</u> : For test structure, change the Si film thickness after the implant diffusion	thin
width (um)	Width total of the transistor's active area minValue 0.08 minValue2 0.40 with go2	0.8µm
length (um)	Length of the transistor's poly area minValue 0.03 minValue2 0.15 with go2	0.03µm
number of fingers	Number of fingers choices "int >0"	1

	<i>Info: the width value correspond to the W unit drawn multiplied by the number of fingers. If numbers of channels AND numbers of fingers are >1, they get the default value</i>	
go2 option	Creation of the GO2 layer or not choices “true if the option is on” <i>Info: the minimum DRM value change with the GO2 layer</i>	nil
connection option	choice of contacts connection for source and drain "contact source-drain" => simple contacts for both "contact source only" => simple contacts for source only "contact drain only" => simple contacts for drain only "no contact source-drain" => no contact "double contact source-drain" => double contacts for both	
gate contact	Creation of a poly/metal1 path to connect the gate choices “true if the option is on” <i>Info: for several fingers, the gated are linked</i>	nil
spacing poly-contact (um)	Distance between the poly gate and the contact of source/drain area minValue 0.105 if U-shaped MOS / 0.055 otherwise (float) minValue2 0.110 with go2	0.105µm
spacing contact-contact result (um)	Not a parameter, it is an information Distance between the contact of source area and the contact of drain area value length + 2* spacing poly-contact	0.24µm
minimum spacing poly-contact	Not a parameter, it is a button to reset the spacing poly-contact value depending on your options	

4.3.2) Test structure Pcell

The pcell “pc_chnl_mos” is a multichannel mosfet. No device corresponds to this Pcell, because it’s not LVS extracted..

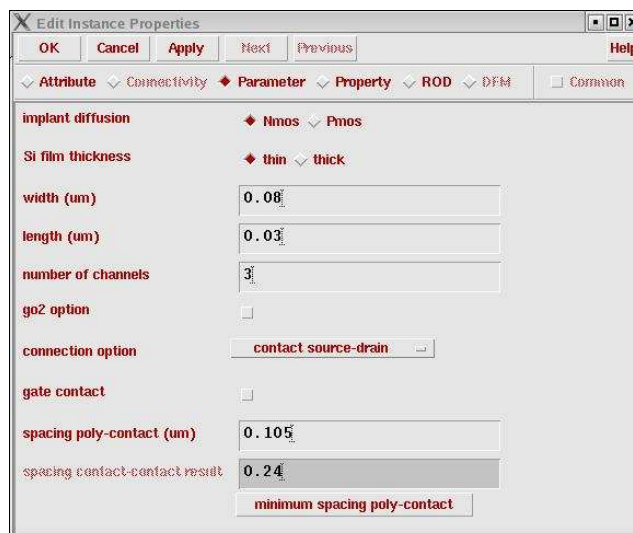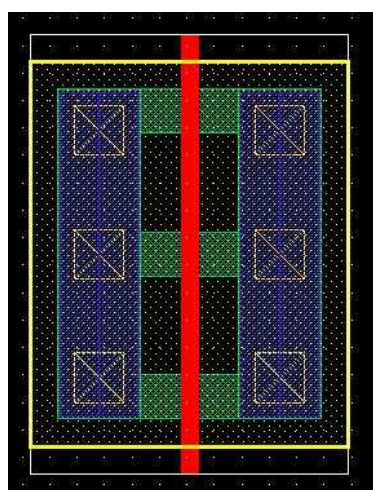


CDF parameter	Description	Default
implant diffusion	Choice of the diffusion type choices "Nmos" / "Pmos" <i>Info: Nmos => DSN / Pmos => DSP</i>	Nmos
Si film thickness	Choice of the Si film thickness choices "thin" / "thick" <i>Info: thin <=> VTN / thick <=> VTP</i> <i>Choice of implant diffusion, generate the standard Si film thickness as default</i> <i>=> standard Nmos, "Nmos" and "thin"</i> <i>=> standard Pmos, "Pmos" and "thick"</i> Important : For test structure, change the Si film thickness after the implant diffusion	thin
width (um)	Width total of the transistor's active area minValue 0.08 (float) minValue2 0.40 with go2	0.08μm
Length (um)	Length of the transistor's poly area minValue 0.03 (float) minValue2 0.15 with go2	0.03μm
number of channels	Number of channels choices "int >0" <i>Info : the width value correspond to the W unit drawn for each channel</i>	1
go2 option	Creation of the GO2 layer or not choices "true if the option is on" <i>Info: the minimum DRM value change with the GO2 layer</i>	nil
connection option	Choice of contacts connection for source and drain "contact source-drain" => simple contacts for both "contact source only" => simple contacts for source "contact drain only" => simple contacts for drain "no contact source-drain" => no contact "double contact source-drain" => double contacts for both	
gate contact	Creation of a poly/metal1 path to connect the gate choices "true if the option is on" <i>Info: for several fingers, the gated are linked</i>	nil
spacing poly-contact (um)	Distance between the poly gate and the contact of source/drain area minValue 0.105 if U-shaped MOS / 0.055 otherwise (float) minValue2 0.110 with go2	0.105μm
spacing contact-contact result (um)	Not a parameter, it is an information Distance between the contact of source area and the contact of drain area value length + 2* spacing poly-contact	0.24μm

minimum spacing poly-contact	Not a parameter, it is a button to reset the spacing poly-contact value depending on your options	
------------------------------	---	--

4.3.3) Body contacted MOSFET Pcell



Pcell “pc_body_mos” is used for the Body contacted MOSFET. No device corresponds to this Pcell.

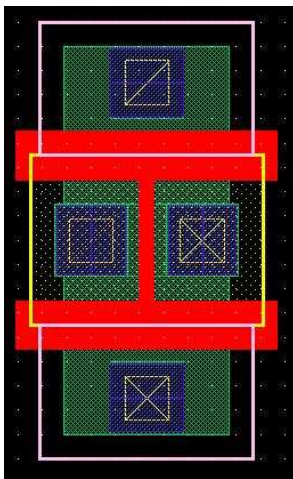

CDF parameter	Description	Default
implant diffusion	Choice of the diffusion type choices "Nmos" / "Pmos" <i>Info: Nmos => DSN / Pmos => DSP</i>	Nmos
width (um)	Width total of the transistor's active area minValue 0.08 (float) minValue2 0.40 with go2	0.08µm
length (um)	Length of the transistor's poly area minValue 0.03 (float) minValue2 0.15 with go2	0.03µm
body plug shape	Adaptation of the poly gate shape choices "H_shape" / "T_shape"	H_shape
plug top left	Creation of a poly/metal1 plug to connect the top gate on left choices "true if the option is on" <i>Info: if T_shape => top connections are not available</i>	nil
plug top righth	Creation of a poly/metal1 plug to connect the top gate on righth choices "true if the option is on" <i>Info if T_shape => top connections are not available</i>	nil
plug bottom left	Creation of a poly/metal1 plug to connect the bottom gate on left choices "true if the option is on"	nil
plug bottom righth	Creation of a poly/metal1 plug to connect the bottom gate on righth choices "true if the option is on"	nil

4.3.4) Gated diodes Pcell

Pcell “pc_dnp_mos” is used for the Gated diode. No device corresponds to this Pcell.

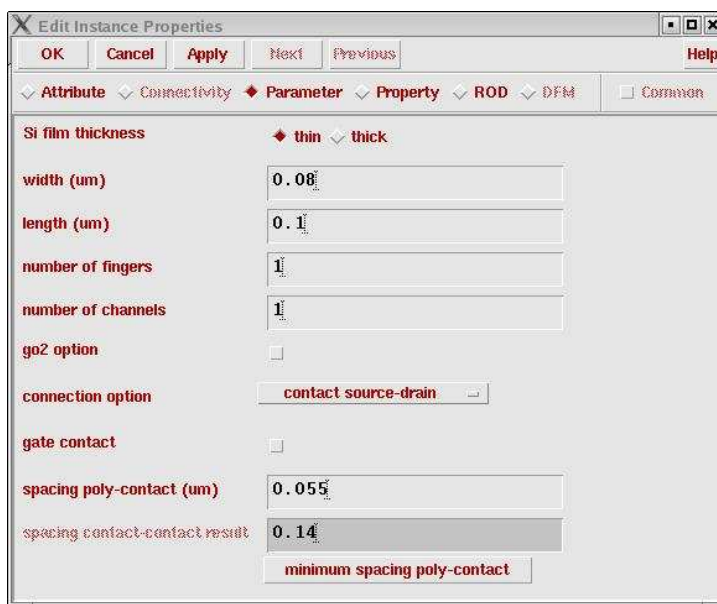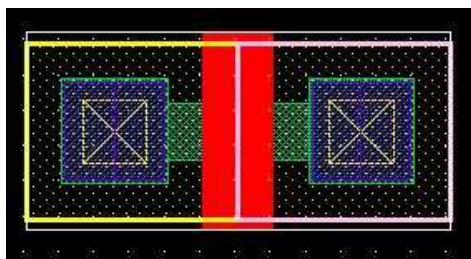


CDF parameter	Description	Default
Si film thickness	Choice of the Si film thickness choices "thin" / "thick" <i>Info: thin <=> VTN / thick <=> VTP</i>	thin
width (um)	Width total of the transistor's active area minValue 0.08 (float) minValue2 0.40 with go2	0.08µm
length (um)	Length of the transistor's poly area minValue 0.03 (float) minValue2 0.15 with go2	0.03µm
number of fingers	Number of fingers choices "int >0" <i>Info: the width value correspond to the W unit drawn multiplied by the number of fingers. If numbers of channels AND numbers of fingers are >1, they get the default value</i>	1
number of channels	Number of channels choices "int >0" <i>Info: the width value correspond to the W unit drawn for each channel. If numbers of channels AND numbers of fingers are >1, they get the default value</i>	1
go2 option	Creation of the GO2 layer or not choices "true if the option is on" <i>Info: the minimum DRM value change with the GO2 layer</i>	nil

connection option	Choice of contacts connection for source and drain "contact source-drain" => simple contacts for both "contact source only" => simple contacts for source "contact drain only" => simple contacts for drain "no contact source-drain" => no contact "double contact source-drain" => double contacts for both	
gate contact	Creation of a poly/metal1 path to connect the gate choices "true if the option is on" <i>Info: for several fingers, the gated are linked</i>	nil
spacing poly-contact (um)	Distance between the poly gate and the contact of source/drain area minValue 0.105 if U-shaped MOS / 0.055 otherwise (float) minValue2 0.110 with go2	0.055µm
spacing contact-contact result (um)	Not a parameter, it is an information Distance between the contact of source area and the contact of drain area value length + 2* spacing poly-contact	0.14µm
minimum spacing poly-contact	Not a parameter, it is a button to reset the spacing poly-contact value depending on your options	

4.3.5) Scribe 22 pads Pcell

Pcell "pc_scribe_22pads is the Scribe 22 pads. No device corresponds to this Pcell.

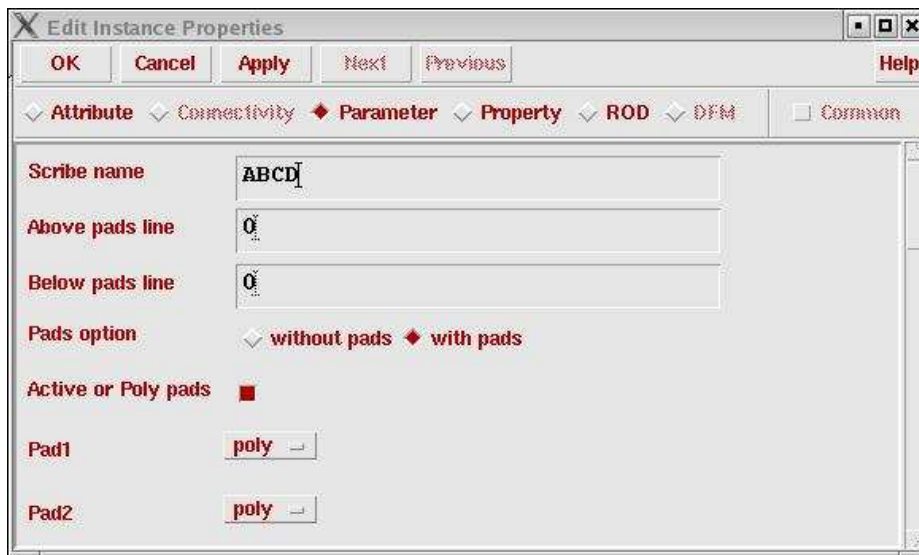


CDF parameter	Description	Default
Scribe name	Creation of the name of the scribe <i>info</i> 4 characters max	ABCD
Above pads line	Above extension of the drawing area defValue 0 (integer>0) <i>info</i> unit : 1 pitch = 80 um	0
Below pads line	Below extension of the drawing area defValue 0 (integer>0) <i>info</i> unit : 1 pitch = 80 um	0
Pads option	Choice of pads or not choices "with pads" / "without pads"	with pads
Active or Poly pads	Selection of specific pads for test choices "true if the option is on" <i>info</i> only possible if "with pads" is on	t
Pad#	Add active or poly layer under the pad, to specify for each pad choices "active" / "poly" <i>info</i> only possible if "choice -active- or -poly- under the pad" is on	poly

4.4) FDSOI Contacts

All contacts described below are accessible across the Contact category into the reference library DK_fdsoi45Lib.

Name	Description
M1_NOD	Connect Metal1 to Active by Contact with DSN
M1_POD	Connect Metal1 to Active by Contact with DSP
M1_OD	Connect Metal1 to Active by Contact
M2_M1	Connect Metal2 to Metal1 by Via1
M2_NOD	Connect Metal2 to Active via VIA1/Metal1/Contact with DSN
M2_POD	Connect Metal2 to Active via VIA1/Metal1/Contact with DSP
M1_PO1	Connect Metal1 to Poly1 by Contact
M2_PO1	Connect Metal2 to Poly1 via VIA1/Metal1/Contact

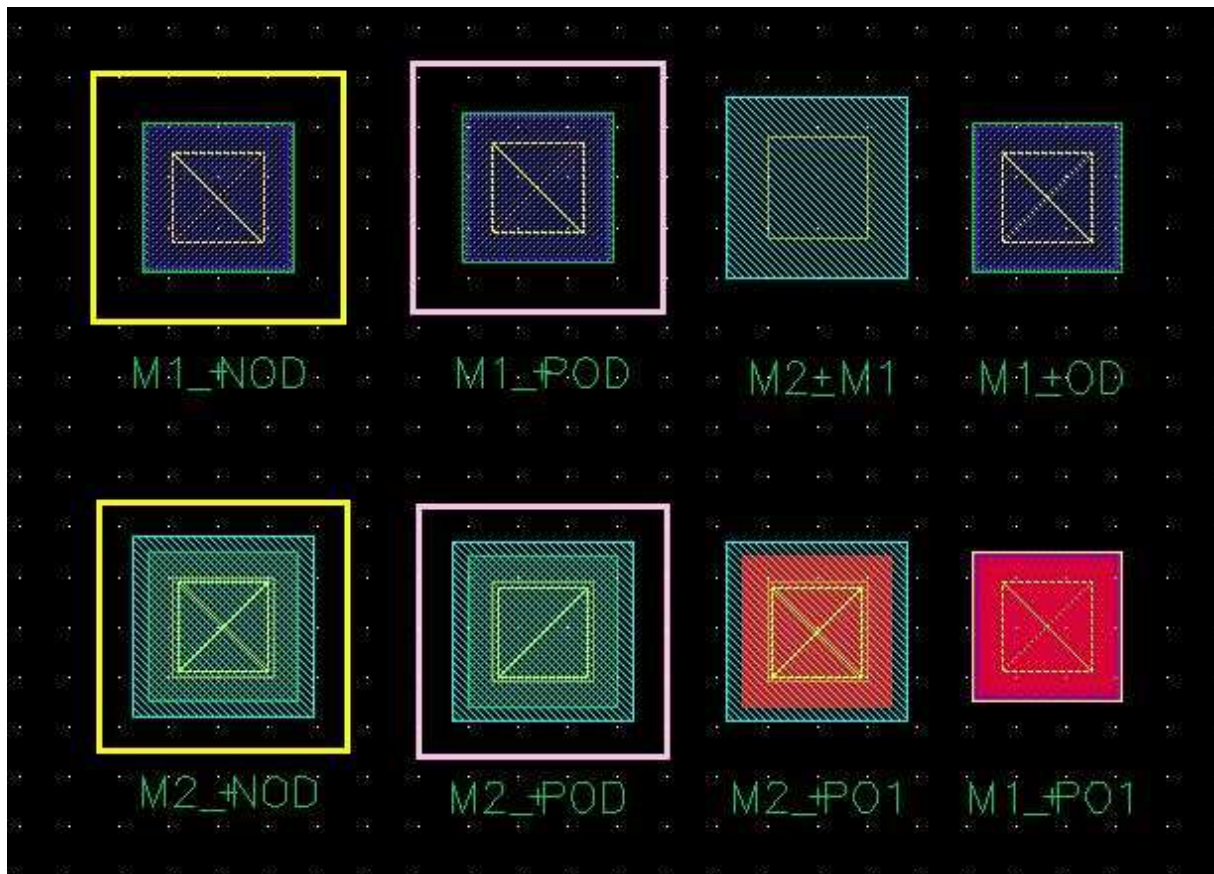

4.5) Eldo module

This section gives an overview about the different Eldo corner model files for devices.


Eldo model files are located in directory:

\$PDK_ROOT/tech/tools/eldo

The version of Eldo simulator is 2008.2a. Model parameters are described below:

Model parameters	Description
Length	drawn channel length (units: meter)
Width	total channel width (units: meter)
Number of fingers	for multifinger device using common diffusion regions - the finger width is Width/Number of fingers
Nb of devices in //	total width is M*Width
Mismatch	flag for mismatch simulation (0=no mismatch)

The model library path is defined in the field Section (cf below) after having selected Setup→ Model Libraries... in the Analog Design Environment window:

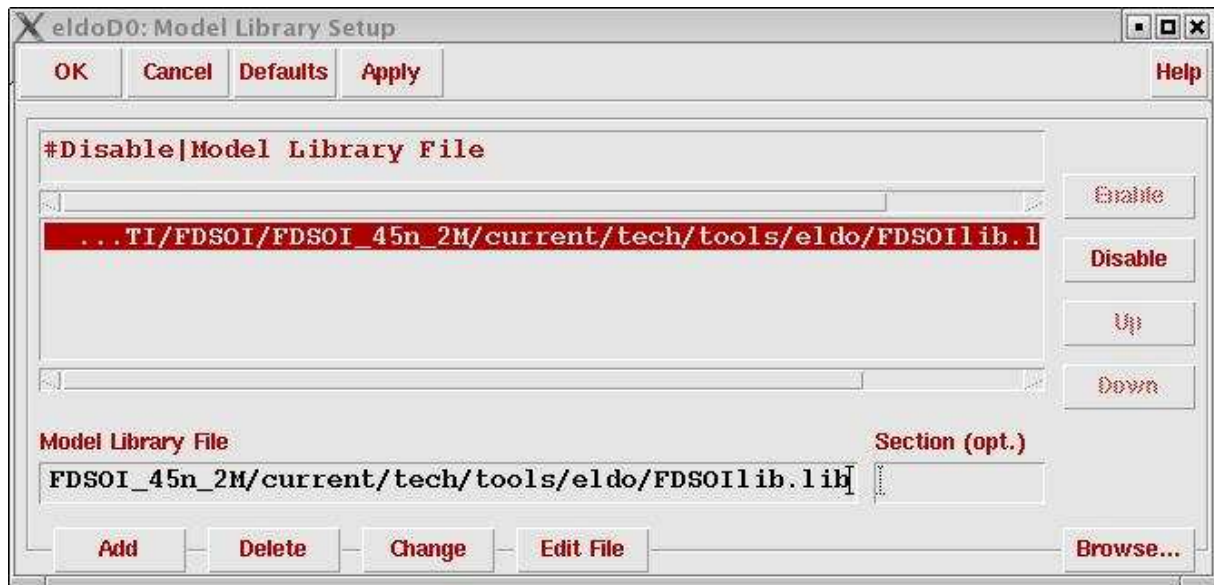

4.6) Calibre module

Calibre v2008.1 is used here as the main physical verification to perform design rule checks (DRC) and to run layout-versus-schematic (LVS) on layout. The Calibre Interactive Graphical User Interface (GUI) is a front-end interface that eases the task of performing interactive verification. The PDK load the Calibre Skill Interface into Virtuoso/VirtuosoXL to start GUI directly from layout window.

The Calibre Skill Interface adds a Calibre menu item automatically to layout windows during start-up of Virtuoso/Virtuoso XL :

The following commands are available in the Calibre menu:

- Run DRC: Starts Calibre Interactive DRC.
- Run LVS: Starts Calibre Interactive LVS. This is not supported in this PDK.

The next section will give information about how to set Calibre Interface GUI for various physical verification tasks.

4.6.1) Calibre DRC


The Calibre DRC file is located under \$PDK_ROOT/tech/tools/calibre directory.

In the Calibre Interactive interface, this file is loaded with the \$PDK_CALIBRE_DRC_DECK variable.

A runset is automatically loaded with the \$MGC_CALIBRE_DRC_RUNSET_FILE variable.

In the “Customization” button, you can select checks like this:


Group	Description	Default
Check Standard Rules	Select all rules except Offgrid, Density and Dummies rules	t
Check Offgrid Rules	Select all Offgrid rules	t
Check Density Rules	Select all Density rules	nil
Check Dummies Rules	Select all Dummies rules	nil

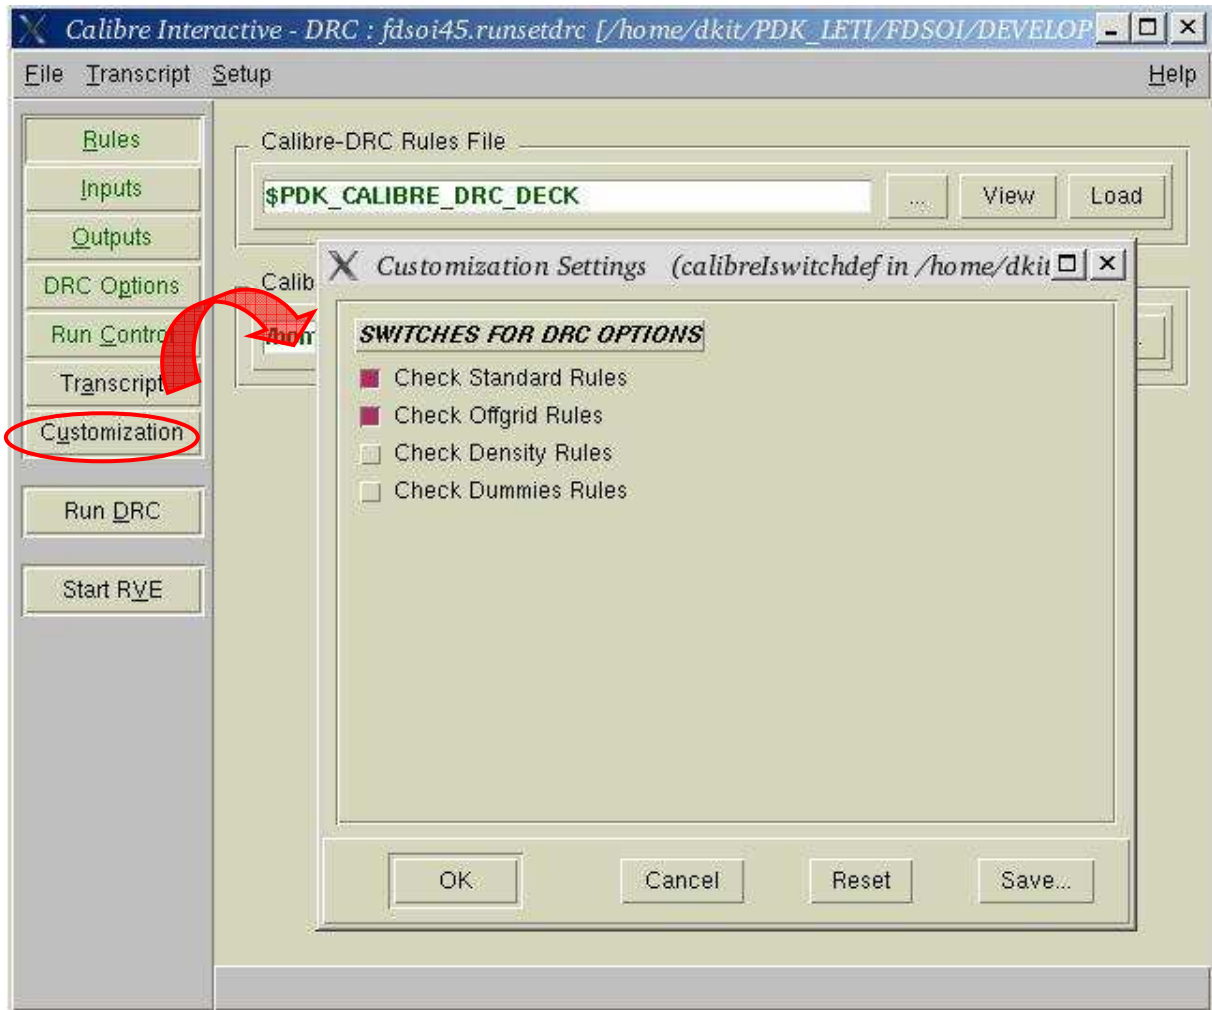

4.6.2) Calibre LVS

The Calibre LVS file is located under \$PDK_ROOT/tech/tools/calibre directory. In the Calibre Interactive interface, this file is loaded with the \$PDK_CALIBRE_LVS_DECK variable.

A runset is automatically loaded with the \$MGC_CALIBRE_LVS_RUNSET_FILE variable.

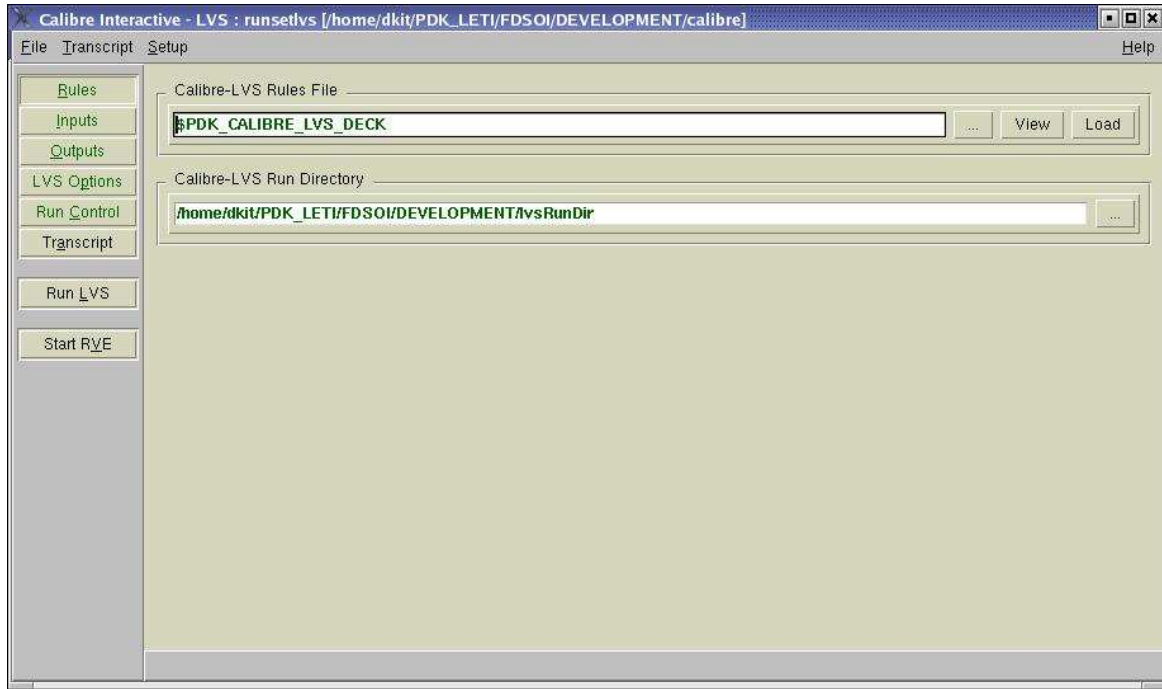


4.6.3) Calibre Dummies generation


There are two passes to generate dummies in low density regions.

4.6.3.1) First pass

For ZA,PO, DSN/DSP & GO2 insert square dummies in low density regions like this:

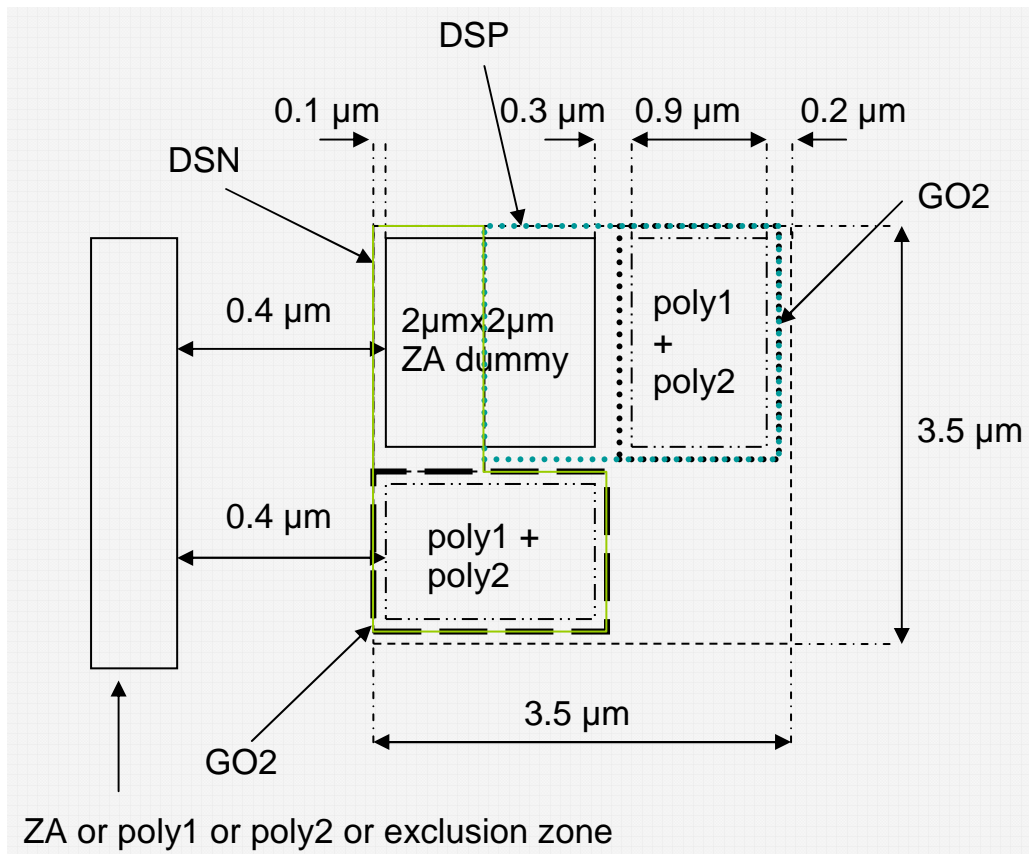


For Metal1 & Metal2 insert square dummies in low density regions like this:

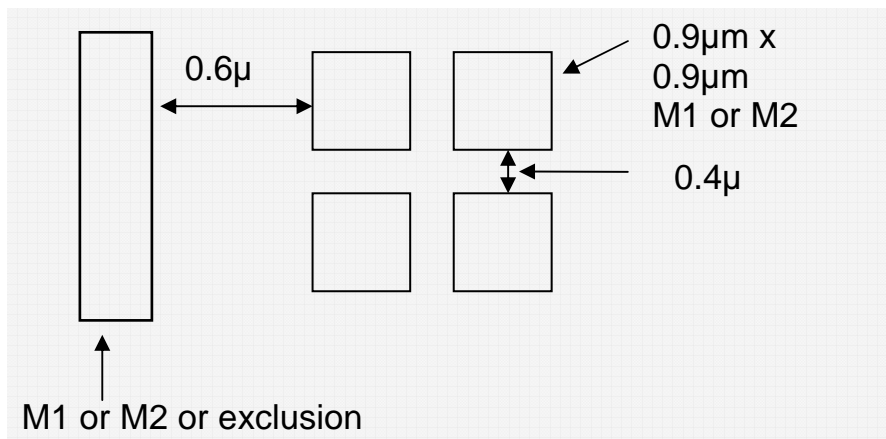


4.6.3.2) Second pass

For ZA, DSN & DSP insert rectangular dummy stripes in horizontal and vertical direction in low density regions like this:

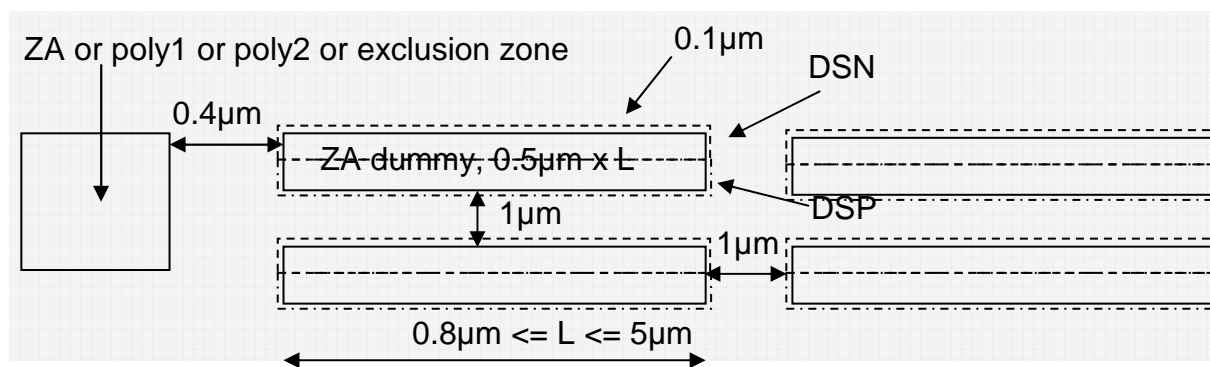

For Metal1 & Metal2 insert rectangular dummy stripes in horizontal and vertical direction in low density regions like this:

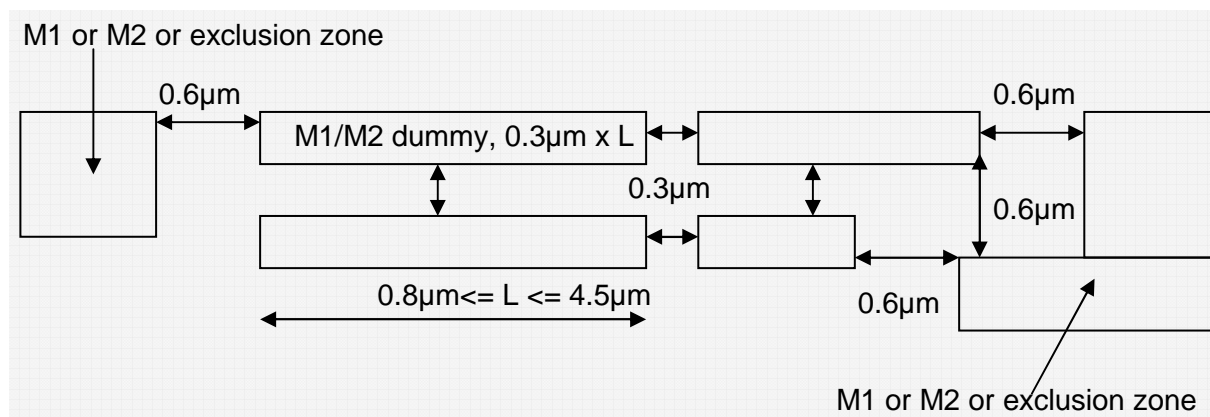


The Calibre Dummies file is located under \$PDK_ROOT/tech/tools/calibre directory. To generate dummies, launch “Run DRC” and this file will be loaded into the Calibre Interactive DRC interface across the \$PDK_CALIBRE_DUM_DECK variable.

To load the correct runset file, select “fdsoi45.runsetdum” in the list when you launch “Load Runset...” in the “File” menu.

This list of runset file is automatically loaded with the \$MGC_CALIBRE_DRC_RUNSET_LIST variable.

In the “Customization” button, you can choose the type of Dummies generation:

- FIRST : first pass of dummies generation
- SECOND : second pass of dummies generation

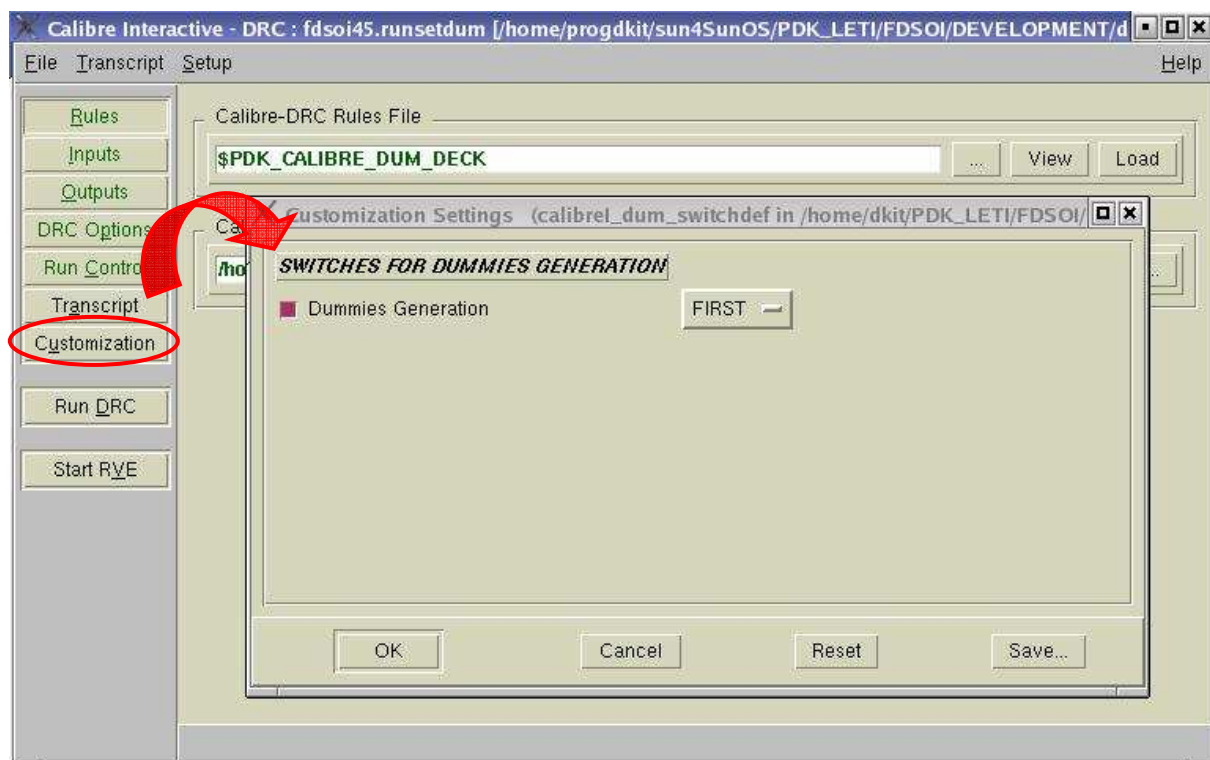

Important: after the first dummies generation, check the density and dummies rules (See 4.6.1 Calibre DRC section). If the check is not valid, launch the second dummies generation.

5 PDK tree

```

$PDK_ROOT
|-- bin/
|   |-- pdk_leti_install_user
|-- cad/
|   |-- .cdsenv
|   |-- .cdsinit
|   |-- .simrc
|   |-- cad.lib
|-- cdsuser/
|   |-- .artist_states/
|   |-- .cdsinit
|   |-- .simrc
|   |-- cds.lib
|   |-- cdsuser_file.tar
|   |-- simulation/
|-- doc/
|   |-- DRM_FDSOI_193nm.pdf
|-- tech/
|   |-- il/
|   |   |-- Ltlabpol.il
|   |   |-- custom_leti.il
|   |   |-- fdsoiBK.il
|   |   |-- fdsoiGR.il
|   |   |-- fdsoiRT.il
|   |   |-- pc_body_mos.il
|   |   |-- pc_chnl_mos.il
|   |   |-- pc_dnp_mos.il
|   |   |-- pc_scribe_22pads.il
|   |   |-- pc_std_mos.il
|   |-- tools/
|   |   |-- calibre/
|   |   |   |-- calibreI_dum_switchdef
|   |   |   |-- fdsoi45.calibredrc
|   |   |   |-- fdsoi45.calibredum
|   |   |   |-- fdsoi45.calibrelvs
|   |   |   |-- fdsoi45.runsetdrc
|   |   |   |-- fdsoi45.runsetdum
|   |   |   |-- fdsoi45.runsetfile
|   |   |   |-- fdsoi45.runsetlvs
|   |   |-- dfII/
|   |   |   |-- cdb/
|   |   |   |   |-- DK_fdsoi45Lib/
|   |   |   |   |   |-- Contact.Cat
|   |   |   |   |   |-- DK_fdsoi45Lib.TopCat
|   |   |   |   |   |-- Devices.Cat
|   |   |   |   |   |-- M1_NOD/
|   |   |   |   |   |   |-- symbolic/
|   |   |   |   |   |   |   |-- layout.cdb
|   |   |   |   |   |   |   |-- master.tag
|   |   |   |   |   |   |   |-- pc.db
|   |   |   |   |   |-- M1_OD/
|   |   |   |   |   |   |-- symbolic/
|   |   |   |   |   |   |   |-- layout.cdb
|   |   |   |   |   |   |   |-- master.tag
|   |   |   |   |   |   |   |-- pc.db
|   |   |   |   |   |-- M1_PO1/
|   |   |   |   |   |   |-- symbolic/
|   |   |   |   |   |   |   |-- layout.cdb

```

```
        |-- master.tag
        `-- pc.db
-- M1_POD/
  `-- symbolic/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- M2_M1/
  `-- symbolic/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- M2_NOD/
  `-- symbolic/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- M2_OD/
  `-- symbolic/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- M2_PO1/
  `-- symbolic/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- M2_POD/
  `-- symbolic/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_ACT/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_ACT_RING/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_ACT_UNIT/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_M1/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_M1_UNIT/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_M2/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
```

```
    `-- pc.db
-- PAD_D_ELEM1_M2_UNIT/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_POLY1/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_POLY1_RING/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_POLY1_UNIT/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_RING/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_VIA1/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PAD_D_ELEM1_VIA1CONT/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- Pad.Cat
-- PadActV1/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PadPolyV1/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- PadV1/
  `-- layout/
    |-- layout.cdb
    |-- master.tag
    `-- pc.db
-- Pad_Act.Cat
-- Pad_Met.Cat
-- Pad_Poly.Cat
-- Pcells.Cat
-- bindkeys/
  `-- manual/
    |-- master.tag
    `-- text.txt
-- cdsinfo.tag
```

```

-- libInit.il
-- nmosfd/
  |-- auCdl/
  |   |-- master.tag
  |   |-- pc.db
  |   `-- symbol.cdb
  |-- eldoD/
  |   |-- master.tag
  |   |-- pc.db
  |   `-- symbol.cdb
  |-- prop.xx
  `-- symbol/
      |-- master.tag
      |-- pc.db
      |-- prop.xx
      `-- symbol.cdb
-- pc_body_mos/
  |-- layout/
  |   |-- layout.cdb
  |   |-- master.tag
  |   `-- pc.db
  |-- manual/
  |-- prop.xx
  `-- text.txt
-- pc_chnl_mos/
  |-- layout/
  |   |-- layout.cdb
  |   |-- master.tag
  |   `-- pc.db
  |-- manual/
  |   |-- master.tag
  |   `-- text.txt
  `-- prop.xx
-- pc_dnp_mos/
  |-- layout/
  |   |-- layout.cdb
  |   |-- master.tag
  |   `-- pc.db
  |-- manual/
  |   |-- master.tag
  |   `-- text.txt
  `-- prop.xx
-- pc_scribe_22pads/
  |-- layout/
  |   |-- layout.cdb
  |   |-- master.tag
  |   `-- pc.db
  |-- manual/
  |   |-- master.tag
  |   `-- text.txt
  `-- prop.xx
-- pc_std_mos/
  |-- layout/
  |   |-- layout.cdb
  |   |-- master.tag
  |   `-- pc.db
  |-- manual/
  |   |-- master.tag
  |   `-- text.txt
  `-- prop.xx
-- pmosfd/

```

```

|-- auCd1/
|   |-- master.tag
|   |-- pc.db
|   `-- symbol.cdb
|-- eldoD/
|   |-- master.tag
|   |-- pc.db
|   `-- symbol.cdb
|-- prop.xx
|-- symbol/
|   |-- master.tag
|   |-- pc.db
|   |-- prop.xx
|   `-- symbol.cdb
|-- prop.xx
|-- techfile.cd%
|-- techfile.cds
|-- cdf/
|   |-- nmosfd.cdf
|   |-- pc_body_mos.cdf
|   |-- pc_chnl_mos.cdf
|   |-- pc_dnp_mos.cdf
|   |-- pc_scribe_22pads.cdf
|   |-- pc_std_mos.cdf
|   `-- pmosfd.cdf
|-- display.drf
|-- fdsoi45.lmt
|-- tech.lib
|-- techfile.tf
|-- eldo/
|   |-- FDSOIlib_ixl.lib -> FDSOI_libV0p0_ixl.lib
|   |-- FDSOI_libV0p0_ixl.lib
|   |-- spfd100p1_ixl.ai

```

ANNEXES

\$PDK_ROOT/cad/.cdsinit :

```

.....
;
; Company : CEA/LETI
; Author  : Gérald Cibrario
; Date   : 06/02/2008
;
; Location: <PDK_ROOT>/cad/.cdsinit
; Version : 1.1
;
.....

println("-----")
println("      PDK LETI      ")
println("                ")
println("      Techno : FDSOI  ")
println("                ")
println("-----")

;Artist Link initialisation
let((t_amsPath t_file)
    t_amsPath = getShellEnvVar("MGC_AMS_HOME")
    when(t_amsPath
        t_file = strcat(t_amsPath "/etc/cds/.cdsinit")
        when(isFile(t_file) load(t_file))
    )
)

;Load .cdsenv file
envLoadFile(strcat( env(PDK_ROOT) "/cad/.cdsenv"))

;Load display.drf file
drLoadDrf(strcat(getShellEnvVar("PDK_ROOT") "/tech/tools/dfII/display.drf"))

;eldoD simulator default into Analog Artist
envSetVal("asimenv.startup" "simulator" 'string "eldoD")

;Model Library Setup for eldoD
cid2=ipcBeginProcess("uname -s")
ipcWait(cid2)
resultat=ipcReadProcess(cid2)

case(resultat
("Linux\n"
    envSetVal("eldoD.envOpts" "modelFiles" 'string strcat( env(PDK_ROOT)
"/tech/tools/eldo/FDSOilib_ixl.lib"))
)
("SunOS\n"
    envSetVal("eldoD.envOpts" "modelFiles" 'string strcat( env(PDK_ROOT)
"/tech/tools/eldo/FDSOilib_ss5.lib"))
)
(t println("Warning: uname -s is not Linux or SunOS"))
)

;when File->Exit in the CIW the "Save Display Information" doesn't appear

```



```
procedure(CCSuppressDispForm()
hiRegTimer("hiFormCancel(techSaveDrmForm)" 10)
)
regExitBefore('CCSuppressDispForm)

;Variables declaration for DRC and LVS file + runset + dummies
pdk_calibre_lvs_file = strcat("PDK_CALIBRE_LVS_DECK=" getShellEnvVar("PDK_ROOT") "/"
"tech/tools/calibre/fdsoi45.calibre_lvs")
pdk_calibre_drc_file = strcat("PDK_CALIBRE_DRC_DECK=" getShellEnvVar("PDK_ROOT") "/"
"tech/tools/calibre/fdsoi45.calibre_drc")
pdk_calibre_dum_file = strcat("PDK_CALIBRE_DUM_DECK=" getShellEnvVar("PDK_ROOT") "/"
"tech/tools/calibre/fdsoi45.calibre_dum")

pdk_calibre_runset_lvs_file = strcat("MGC_CALIBRE_LVS_RUNSET_FILE="
getShellEnvVar("PDK_ROOT") "/" "tech/tools/calibre/fdsoi45.runset_lvs")
pdk_calibre_runset_drc_file = strcat("MGC_CALIBRE_DRC_RUNSET_FILE="
getShellEnvVar("PDK_ROOT") "/" "tech/tools/calibre/fdsoi45.runset_drc")
pdk_calibre_runset_drc_list = strcat("MGC_CALIBRE_DRC_RUNSET_LIST="
getShellEnvVar("PDK_ROOT") "/" "tech/tools/calibre/fdsoi45.runsetfile")

pdk_calibre_switch_dum_file = strcat("MGC_CALIBRE_DUM_SWITCH_FILE="
getShellEnvVar("PDK_ROOT") "/" "tech/tools/calibre/calibreI_dum_switchdef")
pdk_calibre_switch_drc_file = strcat("MGC_CALIBRE_DRC_SWITCH_FILE="
getShellEnvVar("PDK_ROOT") "/" "tech/tools/calibre/calibreIswitchdef")

setShellEnvVar(pdk_calibre_lvs_file)
setShellEnvVar(pdk_calibre_drc_file)
setShellEnvVar(pdk_calibre_dum_file)
setShellEnvVar(pdk_calibre_runset_lvs_file)
setShellEnvVar(pdk_calibre_runset_drc_file)
setShellEnvVar(pdk_calibre_runset_drc_list)
setShellEnvVar(pdk_calibre_switch_dum_file)
setShellEnvVar(pdk_calibre_switch_drc_file)

load(strcat( env(PDK_ROOT) "/tech/il/fdsoiBK.il"))
load(strcat( env(PDK_ROOT) "/tech/il/fdsoiGR.il"))
```

\$PDK_ROOT/tech/tools/dflII/fdsoi45.lmt :

# Cadence # Name	Layer Purpose	GDSII Number	layer DataType
ACTIVE	drawing	02	0
ACTIVE	tile	02	1
POLY1	drawing	13	0
POLY1	tile	13	1
POLY2	drawing	42	0
POLY2	tile	42	1
GO2	drawing	06	0
GO2	tile	06	1
VTN	drawing	60	0
VTP	drawing	43	0
DSN	drawing	16	0
DSN	tile	16	1
DSP	drawing	17	0
DSP	tile	17	1
CONTACT	drawing	19	0
METAL1	drawing	23	0
METAL1	pin	23	83
METAL1	tile	23	1
VIA1	drawing	25	0
METAL2	drawing	27	0
METAL2	pin	27	83
METAL2	tile	27	1
PADOPEN	drawing	40	0
ALUCAP	drawing	41	0
NITRIDE	drawing	31	0
NITRIDE	pin	31	83
ACTPOLY	duexclude	80	0
METAL	duexclude	81	0
MARKER	drawing	82	0
instance	drawing	236	0
prBoundary	drawing	235	0
text	drawing	230	0

\$PDK_ROOT/tech/tools/calibre/fdsoi45.runsetdrc:

```
*drcRulesFile: $PDK_CALIBRE_DRC_DECK
*drcRunDir: ../VERIF/DRC
*drcLayoutPaths: %l.calibre.gds
*drcLayoutPrimary: %l
*drcLayoutGetFromViewer: 1
*drcResultsFile: %l.drc.results
*drcSummaryFile: %l.drc.summary
*drcViewSummary: 0
*cmnTemplate_LP: ../VERIF/GDS/%l.calibre.gds
*cmnShowOptions: 1
*cmnUseCustomFile: 1
*cmnCustomFileName: $MGC_CALIBRE_DRC_SWITCH_FILE
*cmnNumTurbo:
*cmnNumTurboLitho:
```

\$PDK_ROOT/tech/tools/calibre/fdsoi45.runsetdum:

```
*drcRulesFile: $PDK_CALIBRE_DUM_DECK
*drcRunDir: ../VERIF/DUM
*drcLayoutPaths: %l.calibre.gds
*drcLayoutPrimary: %l
*drcLayoutGetFromViewer: 1
*drcResultsFile: %l.dum.gds
*drcResultsFormat: GDSII
*drcDRCMaxResultsAll: 1
*drcDRCMaxVertexCount: 200
*drcSummaryFile: %l.dum.summary
*drcTemplate_RD: %l.dum.gds
*drcTemplate_SF: %l.dum.summary
*cmnWarnLayoutOverwrite: 0
*cmnShowOptions: 1
*cmnUseCustomFile: 1
*cmnCustomFileName: $MGC_CALIBRE_DUM_SWITCH_FILE
*cmnNumTurbo:
*cmnNumTurboLitho:
*cmnSlaveHosts: {use {}} {hostName {}} {cpuCount {}} {a32a64 {}} {rsh {}} {maxMem {}} {workingDir
{}} {layerDir {}} {mgcLibPath {}} {launchName {}}
```

\$PDK_ROOT/tech/tools/calibre/fdsoi45.runsetlvs:

```
*lvsRulesFile: $PDK_CALIBRE_LVS_DECK
*lvsRunDir: ../VERIF/LVS
*lvsLayoutPaths: %l.calibre.gds
*lvsLayoutPrimary: %l
*lvsLayoutGetFromViewer: 1
*lvsSourcePath: %l.src.net
*lvsSourcePrimary: %l
*lvsSourceGetFromViewer: 1
*lvsReportFile: %l.lvs.report
*lvsMaskDBFile: %l.maskdb
*lvsSpiceFile: %l.sp
*lvsAutoMatch: 1
*lvsReportOptions: A B C D
*lvsAbortOnSoftchk: 1
```

```
*lvsPowerNames: VDD vdd "vdd!" "vdd;" VDDS vdds "vdds!" "vdds;"
*lvsGroundNames: GND gnd "gnd!" "gnd;" GNDS gnds "gnds!" "gnds;"
*lvsRecognizeGates: NONE
*lvsERCDatabase: %l.erc.results
*lvsERCSummaryFile: %l.erc.summary
*lvsIsolateShorts: 1
*lvsTemplate_IS: 1
*cmnWarnLayoutOverwrite: 0
*cmnWarnSourceOverwrite: 0
*cmnVConnectNames: "vdd;" "gnd;" VDD GND vdd gnd "vdd!" "gnd!" "vdds;" "gnds;" VDDS GNDS vdds
gnds "vdds!" "gnds!"
*cmnShowOptions: 1
*cmnRemoteClusterQueueCmd: bsub -q <queue_name> %C
*cmnSlaveHosts: {use {}} {hostName {}} {cpuCount {}} {a32a64 {}} {rsh {}} {maxMem {}} {workingDir
{}} {layerDir {}} {mgcLibPath {}} {launchName {}}
```