



Grant Agreement No. 619572

COSIGN

Combining Optics and SDN In next Generation data centre Networks

Programme: Information and Communication Technologies

Funding scheme: Collaborative Project – Large-Scale Integrating Project

Deliverable D1.4

Architecture design

Due date of deliverable: March. 31th, 2014

Actual submission date: April 21st, 2015

Start date of project: January 1, 2014

Duration: 36 months

Lead contractor for this deliverable: i2CAT Foundation

Project co-funded by the European Commission within the Seventh Framework Programme		
Dissemination Level		
PU	Public	X
PP	Restricted to other programme participants (including the Commission Services)	
RE	Restricted to a group specified by the consortium (including the Commission Services)	
CO	Confidential, only for members of the consortium (including the Commission Services)	

Executive Summary

On the basis of the defined requirements carried out in Tasks T1.1, T1.2, this deliverable reports possible network architecture designs with respect to the data and control plane requirements for future DCN.

The deliverable compiles a full set of requirements (reviews D1.1 requirements and completes the list) whose analysis enables to identify basic functionalities, layers and interfaces suitable for the COSIGN architecture design. Besides, a review of recent related initiatives has been carried out. It is not the aim of WP1 partners to compare them, but to use them as a starting reference point and identify major innovations that COSIGN architecture may bring to future DCNs.

Starting from these previous analysis, the document describes possible data plane network architecture designs. The document describes a set of physical layer scenarios for the short, medium, and long-term which rely on novel features and optical technologies, that are being developed under the WP2 umbrella. In terms of control plane, a layered architecture has been proposed defining the functional blocks and interfaces and also explaining the innovation items which brings into scene. The complete control plane architecture specification and implementation is in the scope of WP3. In order to complete the full picture, the document also describes a preliminary version of the orchestrator (to be further developed in WP4) and the service and application layers. A first version of the interfaces between the different COSIGN architecture layers is provided too.

Finally, based on the architecture design and the proposed use cases, it is provided the description of the COSIGN service delivery model specifying roles, actors and phases. The service delivery model justifies the whole COSIGN ecosystem, putting together the use cases, the requirements and the proposed architecture design .

This deliverable constitutes the final result of the WP1Task 3, i.e the specification of the high-level COSIGN DCN architecture based on the requirements compiled in Tasks T1.1, T1.2. The COSIGN architecture model, is intended to be the reference for the different activities of WP2, WP3 and WP4, while implementing the different the functional blocks, layers and interfaces.

Document Information

Status and Version:	Final Version	
Date of Issue:	21/04/2015	
Dissemination level:		
Author(s):	Name	Partner
	José Ignacio Aznar	i2CAT
	Amaia Legarrea	i2CAT
	Eduard Escalona	i2CAT
	Josep Batallé	i2CAT
	Adrián Rosello	i2CAT
	Bingli Guo	UNIVBRIS
	Shuping Peng	UNIVBRIS
	Reza.Nejabati	UNIVBRIS
	Georgios Zervas	UNIVBRIS
	Dimitra Simeonidou	UNIVBRIS
	Sarah Ruepp	DTU
	Michael Berger	DTU
	Anna M. Fagertun	DTU
	Tim Durrant	VENTURE
	Giada Landi	NXW
	Giacomo Bernini	NXW
	Gino Carrozzo	NXW
	Nicola Ciulli	NXW
	Fernando Agraz	UPC
	Salvatore Spadaro	UPC
	Albert Pagès	UPC
	Matteo Biancani	IRT
	Alessandro Predieri	IRT
	Katherine Barabash	IBM
	Anna Levin	IBM
	Oded Raz	TU/e
Edited by:	José Ignacio Aznar	i2CAT
Checked by :	Sarah Ruepp	DTU
	Plus all WP Leaders	

Table of Contents

Executive Summary	2
Table of Contents	4
1 Introduction.....	5
1.1 Reference Material	5
1.1.1 Reference Documents	5
1.1.2 Acronyms and Abbreviations	5
1.2 Document History	6
2 Key challenges of COSIGN architecture	7
3 COSIGN Related European projects and initiatives	9
3.1 European projects	9
3.1.1 GEYSERS	9
3.1.2 LIGHTNESS	9
3.1.3 INSPACE.....	10
3.1.4 PhoxTroT.....	11
3.1.5 SoTA benchmarking.....	12
4 COSIGN architecture full list of requirements.....	16
5 COSIGN Layered Architecture and Functional Specification	18
5.1 Physical layer.....	18
5.1.1 Taxonomy of COSIGN physical resources features	18
5.1.2 Foreseen Data Centre physical scenarios/architectures	19
5.1.3 Orchestration, Management and Control aspects of physical resources.....	26
5.2 Control layer.....	26
5.2.1 Preliminary functional blocks of the control layer	28
5.2.2 Functional blocks features and innovations.....	29
5.3 Orchestration layer	31
5.3.1 Preliminary layers and functional blocks of the COSIGN orchestration layer	33
5.3.2 Functional blocks features and innovations.....	34
6 Architecture inter-Layer Interfaces Preliminary Specification	36
6.1 Control plane and Orchestration layer interface.....	36
6.2 Control plane and data plane interface	37
6.3 Orchestration layer and Service/application layer interface.....	38
7 COSIGN service delivery model.....	40
7.1 COSIGN service model actors and roles	40
7.1.1 COSIGN roles:.....	40
7.1.2 COSIGN actors:.....	41
7.2 Service model phases	42
7.2.1 Service request.....	42
7.2.2 Service deployment	43
7.2.3 Service Operation	44
7.2.4 Service termination.....	44
8 Summary	45
Appendix: Complete list of COSIGN and Future DCN architectures requirements	46

1 Introduction

1.1 Reference Material

1.1.1 Reference Documents

[1]	COSING FP7 Collaborative Project Grant Agreement Annex I – “Description of Work”
[2]	T. Benson, A. Akella, and D. A. Matlz, “Network Traffic Characteristics of Data Centers in the Wild”, Proc. IMC 2010
[3]	COSING WP3 Deliverable D3.1 SDN framework functional architecture
[4]	COSING WP4 Deliverable D4.1 COSIGN orchestrator requirements and high level architecture
[5]	COSIGN WP1 Deliverable D1.1 Requirements for next generation intra-Data Centres network design
[6]	LIGHTNESS project, “Release of the design and early evaluation results of OPS switch, OCS switch, and TOR switch”, Deliverable D3.1, November 2013.
[7]	LIGHTNESS project, “Implementation results of the OPS switch, the OCS switch, and the TOR switch”, Deliverable D3.2, June 2014.
[8]	LIGHTNESS project, “The LIGHTNESS network control plane architecture”, Deliverable D4.1, July 2013.
[9]	LIGHTNESS project, “The LIGHTNESS network control plane protocol extensions”, Deliverable D4.2, June 2014.
[10]	SDN architecture, ONF technical report, 2014.
[11]	COSIGN WP1 Deliverable D1.2 Comparative analysis of optical technologies for Intra-Data Centres network.
[12]	COSIGN WP1 Deliverable D1.3 Comparative analysis of control plane alternatives.
[13]	G. Booch, et al., “The UML Reference Manual”. AW, 1999, ISBN 1931777446
[14]	Reference Model of Open Distributed Processing, p.17, def 9.4
[15]	http://www.jencotech.com/documents/PolatisOverviewRev1.pdf
[16]	Lightness Project: Low latency and high throughput dynamic network infrastructures for high performance datacentre interconnects. http://www.ict-lightness.eu/
[17]	GEYSERS Project (Generalized Architecture for Dynamic Infrastructure Services). http://www.geysers.eu/
[18]	INSPACE Project: Spatial-Spectral Flexible Optical Networking: Solutions for Efficient SDM. www.ict-inspace.eu
[19]	PhoxTroT Project: Photonics for High-Performance, Low-Cost and Low-Energy Data Centers, High Performance Computing Systems. http://www.phoxtrot.eu/
[20]	COSIGN WP3 Deliverable D3.2 SDN framework north-bound and south-bound interfaces specification.

1.1.2 Acronyms and Abbreviations

Most frequently used acronyms in the Deliverable are listed below. Additional acronyms can be specified and used throughout the text.

AAA	Authentication, Authorisation, Accounting
A-CPI	Application-Controller Plane Interface
AoD	Architecture on Demand
API	Application Programming Interface
AWG	Array Waveguide Grating
Cloud-SP	Cloud Service Provider
CRUD	Create Read Update Delete
DC	Data Centre
DCN	Data Centre Network

D-CPI	Data-Controller Plane Interface
DC-PIP	Data-Center Physical Infrastructure Provider
DC-VIP	Data-Center Virtual Infrastructure Provider
GMPLS	Generalized Multi-Protocol Label Switch
IT	Information Technologies
MCF	Multicore Fibre
MPO	Multipath Push On
NBI	North Bound Interface
NCP	Network Control Plane
NE	Network Element
NIC	Network Interface Card
NMS	Network Management System
OCS	Optical Circuit Switching
OF	Open Flow
OPS	Optical Packet Switching
OSPF-TE	Open Shortest Path First – Traffic Engineering
OXS	Fast Optical Switch
PBGF	Photonic Band Gap Fibre
PCE	Path Computation Element
PCEP	Path Computation Element Protocol
PCI	Protocol Control Information
QoS	Quality of Service
RDB	Resource Data Base
REST	Representational State Transfer
RSVP-TE	Resource Reservation Protocol – Traffic Engineering
SBI	South Bound Interface
SDN	Software Defined Networking
SLA	Service Level Agreement
SMF	Single Mode Fibre
SML	Service Management Layer
SoTA	State of The Art
STREP	Specific Targeted Research Project
TDM	Time Division Multiplexing
ToR	Top of the Rack
VDC	Virtual Data Centre
WSS	Wavelength Selective Switch

1.2 Document History

Version	Date	Authors	Comment
0.1	18/11/2014	See the list of authors	TOC first draft
2.6	23/02/2015		Initial Draft after partners contributions
2.7	02/03/2015		IBM, DTU, UBristol contributions to all sections
2.9	12/03/2015		DTU, UBristol input
3.0	24/03/2015		i2CAT
3.1	01/04/2015		I2CAT
3.2	10/04/2015		I2CAT
3.5	15/04/2015		I2CAT
3.6	20/04/2015		I2CAT
Final version	20/04/2015		I2CAT

2 Key challenges of COSIGN architecture

The main objective of the COSIGN project is to design and demonstrate a Data Centre Network (DCN) architecture built over innovative optical technologies combined with SDN based network control and service orchestration for future-proof, dynamic, on demand, low-latency and ultra-high bandwidth intra-data centre applications. In other words, to create the blueprint of the future Data Centre network where highly efficient optical interconnect technologies, controlled by the advanced programmable software control plane, satisfy the diverse and dynamic requirements of modern Data Centre workloads as it was stated in the DOW document [1].

According to recent studies and publications [2], DC providers are experiencing an annual increase of over 70% in the amount of data centre traffic, of which about 50%-75% is east-to-west (server to server and rack to rack) traffic within data centres. One of the main challenges that the Data Centre network architecture will have to overcome in the coming years will be the ever-increasing data centre traffic volumes and new traffic patterns. COSIGN infrastructure aims to provide Data Centre applications with efficient and reliable provisioning and migration mechanisms, while supporting huge scale and high level dynamics.

In order to reach this target, WP1 partners started from a complete description of the three proposed use cases (namely *Multi-tenant Software Cloud*, *Virtual Data Centre (VDC) as advanced IaaS provisioning* and *Advanced infrastructure orchestration and management*) to retrieve functional requirements that future Data Centre Networks architectures would incorporate and adopt. The outcome was compiled in D1.1 [5]. A brainstorming session was carried out in order to extend, refine and assess previous requirements and analyse the way these would match the architecture. The input from IBM and Interoute COSIGN partners resulted key in the identification of the three use cases and their analysis to retrieve the functional aspects of COSIGN DC network architecture. These challenges that arise due to new traffic patterns are common to both IBM and Interoute, industrial partners of the consortium. In parallel to previous requirements analysis, partners working on the COSIGN DC network architecture carried out a comparative analysis of optical technologies and software solutions suitable for intra-DC networks.

Aiming to satisfy future Data Centre network requirements, **optical technologies** are being proposed, introducing novel optical fibres and optical switches. Specifically, high Radix optically enabled Ethernet switches will be developed as ToR switch using mid-board optics achieving reduced cost, low power consumption and increased front panel bandwidth density. Also, the spatial division multiplexing fibres and low latency fibre (e.g., hollow core photonic band-gap fibres, PBGFs) are object of research in different network scenarios to reduce cabling complexity and end-to-end data transmission latency. Large port count and low loss free space 3D-beam steering optical switches will be developed to interconnect ToR switches building up a flatten DCN architecture. At the same time, fast optical switches with highly modular scalability will be investigated at the optical packet level in a synchronous intra-rack network. COSIGN WP2 partners are focused on the study of these optical technologies and together with WP1 have released D1.2 [11] document, that reports the analysis of the optical technologies comparison analysing alternatives for switches, fibres, interfaces and scenarios suitable for the definition of COSIGN data plane architecture.

WP3 aims to integrate the characteristics of all the aforementioned novel optical technologies. The adoption of SDN technologies targets the abstraction and simplification of the underlying network complexity. Based on an **SDN-based control plane** approach, a network controller customized for optical technologies allows DC operators to manipulate logical maps of the infrastructure and the creation of multiple co-existing virtual networks that are not dependant on the underlying technology and network protocols, enabling in this way application level programmability. Coordinated with WP1, COSIGN WP3 is working on the development of the SDN based control plane. A survey about Software Defined Networking (SDN) control plane solutions and a discussion on network virtualization techniques was carried out and compiled in D1.3 [12] and an initial control plane

functional specification has been recently released D3.1 [3]. Currently, the definition of southbound and northbound interfaces and functionalities is being explored and will be released in D3.2 [20].

COSIGN WP4 focuses on the definition and integration of the services of the orchestrator; D4.1 [4] has been delivered and describes the COSIGN view of architectural trends in the area of services orchestration. COSIGN vision is that a unified orchestration layer is required to enable the Data Centre management stack to efficiently manage the underlying resources while providing the demands of multiple heterogeneous workloads. In particular, WP1 has developed a high level design of the **orchestration layer** and its interfaces. It is in the scope of WP4 to develop such layer and interfaces to other COSIGN components.

Therefore, it is fundamental the continuous monitoring and coordination of activities carried out in WP2, WP3 and WP4 to guarantee the coherence between the expected Hardware and Software technologies considered in each of these WPs and the architecture design specification, as an outcome of WP1. Based on previous activities, the action plan to ensure a suitable COSIGN functional architecture description includes:

- Definition of **high level building blocks**, matching reference model and draft the functional description of the architecture layers (M12).
- **Layers definition** and functionalities allocation (M12).
- **Identification of interfaces** to the overall DC orchestration tools so that future DCN architecture fits into the COSIGN vision of the future programmable virtualized Data Centre (M13).
- **Evaluation of the proposed architecture** from entire workflow perspective (M13 and M14)
- **Architecture specification**: Specification of the architecture and functionalities (M15).

This document summarizes the outcomes of this action plan and specifies possible network architecture designs with respect to the data and control plane requirements for future DCN. The remaining sections of this document are structured as follows:

Section 3 of this document lists and provides an explanation and benchmark of recent related European projects that happened in the past or are currently running in the area of DCN, looking at efficiency and optical control plane optimisation for ToR switches.

In section 4 it is justified the reason of being of the requirements survey. They constitute a valuable tool to determine layers, building blocks and interfaces of the COSIGN architecture. Thus, it is explained the process of collecting and analysing the requirements. The complete list of requirements (over 50) is provided in the Appendix.

Section 5 provides an overview of the COSIGN architecture and its innovative features, the kind of problems faced by the consortium and the proposed solutions. This section also explains the different levels of the COSIGN architecture: physical, control and orchestration. The physical (or Data Plane) level analyses 4 scenarios that have been proposed for the short, medium long and long terms. The control plane architecture consists of 3 layers: abstraction, infrastructure and network virtualization layer. Functional control blocks are defined from a high level point of view and the relationship between them is also specified. The control layer is responsible for the optical resource virtualization, topology management, path computation, optical services provisioning, fault monitoring, etc.; delivering the DCN services according to policies and SLAs set up by the upper layer entities (e.g. the orchestrator) and/or the DCN administrator. The orchestration layer is also outlined providing a description of its functionalities and its relationship with other layers.

Section 6 of this report provides an explanation about the interfaces between control plane and orchestration layer; together with the interactions that may take place between them, such as: customised virtual network requests, DC dynamic optical connectivity requests and information about status and resource occupation in real-time.

Section 7 is related to the service delivery model. The services running on top of COSIGN design are the reason-being of the whole system. It includes the roles, actors and the service model to deliver those services on top of the proposed COSIGN DCN architecture.

3 COSIGN Related European projects and initiatives

3.1 European projects

Data Centre (DC) infrastructure technology evolves at a fast pace stressed by continual growth data volumes and the lack of capability of current architectures to cope with fast service provisioning and higher consumption needs. More powerful and efficient DCs are required and this is reflected in the plurality of research projects funded by the EU and US. This complex and multi constraint problem has been addressed in various ways including down-to-earth approaches that combine commodity switches with optics to more ambitious all-optical solutions. Here we explore the relationship between COSIGN and four related EU projects: GEYSERS [17], LIGHTNESS [16], INSPACE [18] and PhoxTrot [19].

3.1.1 GEYSERS

3.1.1.1 Description

The FP7 GEYSERS project [17] (Generalised Architecture for Dynamic Infrastructure Services) run from January 2010 to March 2013 and defined an architecture for the composition and delivery of virtual optical infrastructures combined with pools of Information Technology (IT) resources for virtual operators. On top of each virtual infrastructure, GEYSERS defined a Generalized Multi-Protocol Label Switching (GMPLS) and Path Computation Element (PCE) based Network Control Plane (NCP) for the on-demand provisioning of energy-efficient optical connectivity between DCs and a Service Management Layer for the provisioning of cloud services. The virtualization of the optical resources allowed the GMPLS controllers to adopt a unified south-bound interface to interact with and configure the virtual nodes, abstracting the vendor details of the optical technologies.

GEYSERS identified new connectivity paradigms to enable the cross-layer cooperation between cloud management and network control to achieve a joint, converged optimization between network and IT. The selection of the target datacentres were in some cases delegated to the Network Control Plane, with IT and energy aware algorithms running at the Path Computation Element. Additionally, inter-DC network connectivity was established on demand during the deployment of the end-to-end distributed cloud service. This procedure was triggered by the Service Management Layer (SML), which could also choose the preferred path among several alternatives proposed by the Network Control Plane, depending on price, power consumption or other metrics.

3.1.1.2 GEYSERS - COSIGN comparison

GEYSERS was one of the first projects to investigate virtualization of optical resources and on-demand delivery of virtual optical infrastructures. These concepts can be applied in COSIGN, even if translated and adapted to a completely different scope, i.e. from the core transport network to the infrastructure of a DC network, addressing also new requirements and challenges especially in terms of service dynamicity.

The abstraction of the virtual optical resources investigated in GEYSERS can potentially influence the COSIGN data plane model at the control level. However, the core control mechanisms in the two projects are completely different: while GEYSERS relied on a GMPLS and PCE-based control plane, with distributed controllers and the wide adoption of signalling and routing protocols (i.e. RSVP-TE, OSPF-TE, PCEP), COSIGN will adopt an SDN based control plane with a centralized controller in charge of configuring and program the whole datacentre network.

3.1.2 LIGHTNESS

3.1.2.1 Description

LIGHTNESS [16] (Low latency and hIgh throughpUT dynamic Network infrastructures for high pErformance datacentre interconnectS) is a running STREP project funded by the Seventh Framework

Programme (FP7) of the European Commission. The main goal of the LIGHTNESS project is to demonstrate an SDN-controlled all-optical DCN, which combines Optical Circuit Switching (OCS) and Optical Packet Switching (OPS) technologies to provide tailored transport to data centre applications with different requirements (e.g., latency, throughput, etc.). In the proposed flattened optical network infrastructure, the traffic coming from the servers is classified into long-lived data flows, which are transported by means of OCS technology, and short-lived ones, which take advantage of the fast switching capability provided by OPS. The SDN-controller manages this operation, thus enabling the control and programmability of the DCN.

The main objective of the project is two-fold. First, the design and prototyping of the data plane devices is targeted. This includes the development of the OPS node, an Architecture-on-Demand (AoD), which integrates the OCS and OPS transport technologies by seamlessly forwarding data flows coming from the ToR switch to the appropriated device (i.e. to the OPS or the OCS depending on the requirements of the applications) [6],[7]. Second, the project targets at the design and development of an SDN-controller able to manage the heterogeneous data plane in an integrated way [8]. To this end, the OpenFlow (OF) protocol has been provided with the extensions necessary to control the prototyped devices [9]. In addition, a set of OpenFlow (OF) agents have been developed and integrated into the different optical network devices to enable the OF-based configuration of the data plane from the SDN-controller.

3.1.2.2 *LIGHTNESS - COSIGN comparison*

LIGHTNESS investigates the SDN-based integrated control of a flattened hybrid all-optical DCN, based on the OCS and OPS switching technologies.

Although COSIGN proposes a different data plane architecture, the expertise achieved in LIGHTNESS will leverage the control and management of the new data plane. In addition, the knowledge on the SDN paradigm obtained in LIGHTNESS will be extremely useful to overcome the ambitious challenges committed by COSIGN at both the control and orchestration levels. COSIGN approach is more practical, aiming at realistic DC requirements that include cost, equipment readiness, scale, etc., while LIGHTNESS explores the feasibility of all-optical technologies like OPS.

Although the main objective of LIGHTNESS is to provide tailored transport services to DC applications, the project has also proposed some tasks oriented to virtualize the optical DCN infrastructure. However, LIGHTNESS virtualization strategies aim to be an initial approach to be used within the optical DCN and just focused on virtualizing the LIGHTNESS specific network infrastructure. On the contrary, the objectives posed by COSIGN in this regard are much more ambitious, targeting a cross-layer approach to the virtualization of the whole DC infrastructure including IT and network resources orchestrated by the application layer to provide, for example, virtual data centre (VDC) infrastructures and multi-tenancy in a dynamic and efficient way. This includes a plethora of tasks to be conducted from the orchestration and control layers such as optimizing the optical resource utilization, optical resource virtualization, transport service provisioning, VDC provisioning, tenants management, AAA and SLA management, etc. In any case, the experience gained during LIGHTNESS in the control and management fields is expected to be helpful to overcome COSIGN's challenges.

3.1.3 *INSPACE*

3.1.3.1 *Description*

INSPACE project [18] (Spatial-Spectral Flexible Optical Networking: Enabling Solutions for a Simplified and Efficient SDM) proposes a novel networking approach by extending the established spectral flexibility concepts to the SDM domain and significantly simplifying the super-channel allocation and control mechanisms, by removing current limitations related with the wavelength continuity and fragmentation issues. The new concept utilises the benefits of the high capacity, next generation, few-mode/multi-core fibre infrastructures, providing also a practical short-term solution, since it is directly applicable over the currently installed multi-fibre cable links. The realisation of INSPACE approach is enabled by the development of novel multi-dimensional spatial-spectral switching nodes, which are fabricated by extending the designs of the existing flexible WSS nodes,

incorporating advance mode/core adapting techniques. The concept is further supported by novel processing techniques that minimise the mode/core interference as well as new network planning algorithms and control plane extensions that are enhanced with the space dimension. The INSPACE consortium forms a strong industry driven research team targeting not only the demonstration of the new network concept and its ability to meet the challenges of delivering exponentially growing content over the next twenty years, but also the full exploitation of its potential towards commercialisation. Specifically, INSPACE is proposed with the following objectives:

- Definition of the next generation flexible optical networking functions and capabilities enabled by the introduction of spatial-spectral switching nodes
- Design and development of spatial-spectral WSS-based switching node
- Development of advanced link designs and MIMO digital signal techniques for MCF/FMF transmission impairments mitigation
- Development of routing and resource allocation algorithms for network planning
- Development of control plane extensions and interfaces with the spatial-spectral routing node
- Integration and performance evaluation of the INSPACE spatial-spectral optical networking system
- Techno-economic and energy efficiency evaluation of the INSPACE network solution considering also the migration scenarios from current deployed networks and offered solutions
- INSPACE technology exploitation, dissemination of project results and contribution to standards

3.1.3.2 *INSPACE - COSIGN comparison*

INSPACE introduces a novel logical hierarchical structure for next generation multidimensional dynamic and elastic optical networks, based on enabling spatial switching and transmission technologies, which are related to the spatial multiplexing scenario (multi-core or multi-element fibre) in COSIGN.

INSPACE focuses on a general network scenario and also explore other network benefits arising from a combined Spatial/Spectral/Signal-coding domain (e.g., mode, spectrum, transmission format, electronic MIMO processing). In contrast, COSIGN aims to develop appropriate optical technologies for data centres network so that future data centres achieve the required large scale at low cost, as well as enabling multi-tenancy services, flexibility, ease of management and operations. Regarding the data plane devices, as well as employing multi-core/multi-element fibre based spatial transmission media, COSIGN also explores ToR switch with on-board optical interface, large scale optical switch and optical fast switch for different network scenario. In addition, control and management technologies are explored in COSIGN, together with the coordination of the architecture and IT resources.

3.1.4 PhoxTroT

3.1.4.1 *Description*

PhoxTroT [19] is a large-scale research effort focusing on high-performance, low-energy and cost and small-size optical interconnects across the different hierarchy levels in data center and high-performance computing systems: on-board, board-to-board and rack-to-rack. PhoxTroT will tackle optical interconnects in a holistic way, synergizing the different fabrication platforms in order to deploy the optimal “mix&match” technology and tailor this to each interconnect layer. PhoxTroT will follow a layered approach from near-term exploitable to more forward looking but of high expected gain activities.

The objective of PhoxTroT is the deployment of:

Combining Optics and SDN In next Generation data centre Networks

- Generic building block that can be used for a broad range of applications, extending performance beyond Tb/s and reducing energy by more than 50%.
- A unified integration/packaging methodology as a cost/energy-reduction factor for board-adaptable 3D SiP transceiver and router optochip fabrication.
- The whole “food-chain” of low-cost and low-energy interconnect technologies concluding to 3 fully functional prototype systems: an >1Tb/s throughput optical PCB and >50% reduced energy requirements, a high-end >2Tb/s throughput optical backplane for board-to-board interconnection, and a 1.28Tb/s 16QAM Active Optical Cable that reduces power requirements by >70%

3.1.4.2 *PhoxTroT - COSIGN comparison*

The focus of the PhoxTroT project is innovation in optical technologies for interconnecting data centre equipment. While the data plane objectives of COSIGN project are similar to those of PhoxTroT, the scope of COSIGN is broader and includes the control and the orchestration layers of the Data Centre Network, especially the innovation in the software stack. Novel interconnect devices and prototypes developed in PhoxTroT are of a great interest to the COSIGN and must be watched in order to ensure their inclusion into the overall ecosystem of the Next Generation DCN envisioned by COSIGN.

Table 1 shows the previously described architecture as a function of several general concepts relevant to the definition of COSIGN architecture. By comparing the different alternatives, it can be seen that most of them have a clear focus on the definition of a suitable data plane by leveraging different optical technologies. Only COSIGN and LIGHTNESS proposes an SDN based control plane, meanwhile it is only COSIGN the one proposing a full orchestrated architecture considering services which imply a joint provisioning of networking and IT resources. Some other parameters relevant to COSIGN (e.g. virtualization, abstraction, automation mechanisms) are also taken into account.

3.1.5 SoTA benchmarking

It can be observed that all the architectures chase the research and adoption of data plane optical technologies although each project focusses on different technologies to be applied for different goals. On the other hand only COSIGN and LIGHTNESS show an important focus on the control plane, standing up for an SDN based approach. In terms of management and orchestration, GESYSERS and COSIGN present dedicated effort to the joint provisioning of IT and Network resources. Nevertheless only COSIGN solution clearly aims to define and implement a full orchestrated architecture considering services which imply a joint provisioning of networking and IT resources, including virtualization and abstraction mechanisms while provisioning the services. Additionally, the benchmarking has also considered several parameters which are relevant to the COSIGN architecture as per the benefit they may bring to the services provided. Per each of the related SoTA it has been identified if any of them have considered virtualization, abstraction, automation mechanisms, coupled provisioning of IT and Network solutions and if the architecture design considers inter-DC environments and energy consumption features.

ARCHITECTURE	GEYSERS	LIGHTNESS	PhoxTrot	COSIGN	INSPACE
CONCEPT					
MAIN GOAL	To define, develop and validate an end-to-end capable of provisioning Optical Network and IT resources for end-to-end service delivery	To design, implement and carry out the experimental evaluation of a high-performance network infrastructure for data centres. Develop a high-performance network infrastructure for data centres	It focuses on high-performance, low-energy and cost and small-size optical interconnects across the different hierarchy levels in data Center and high-performance computing systems: on-board, board-to-board and rack-to-rack. It also tackles optical interconnects in a holistic way, synergizing the different fabrication platforms in order to deploy the optimal “mix&match” technology and tailor this to each interconnect layer.	To define and implement a flat, scalable Data-Centre-Network architecture, empowered by novel optical technologies and SDN based network control and service orchestration platform for dynamic, on-demand, low-latency and ultra-high bandwidth Intra-DC applications.	To explore the additional degrees of freedom in signal multiplexing (offered by the latest advances in both multi-mode and multi-core fibre systems) and to examine the capabilities of the enabling technologies in support of the multi-dimensional networking concept
DATA PLANE	ROADM and OXC technologies	Optical Circuit Switching (OCS) and Optical Packet Switching (OPS) and hybrid top-of-the-rack (TOR) switches technologies	Optical printed circuit board with a throughput greater than one terabyte per second, a high-end optical backplane for board-to-board interconnection with a throughput greater than two terabits per second, and an active optical cable (AOC).	High Radix optically enabled Ethernet switches multi-core fibre (MCF) TOR switches based on large port count and low loss free space 3D-beam fast optical switches	Multi-dimensional spatial-spectral switching nodes

CONTROL PLANE	GMPLS and PCE	Unified SDN-based DCNcontrol plane	Not covered	SDN paradigm extended to leverage capabilities from high-performance optical elements while developing technology agnostic protocols for Software/user defined routing and control.	Routing and resource allocation algorithms for the planning and operation of spatial-spectral flexible optical networks
MANAGEMENT AND ORCHESTRATION	Partial E2E provisioning of static IT and Network resources. Not really a full orchestrated solution but a service middleare layer (SML).	Not covered	Not covered	Framework for optical network and IT infrastructure abstraction, virtualization and end-to-end service orchestration is considered.	Not covered
NETWORK VIRTUALIZATION CONSIDERED	YES	YES	NO	YES	NO
DCN AUTOMATED PROVISIONING MECHANISMS CONSIDERED	YES	YES	NO	YES	NO
ABSTRACTION OF VIRTUAL OPTICAL RESOURCES CONSIDERED	YES: L1CL software component is responsible for resource abstraction	Partially covered	Not covered	YES	YES: based on an SDN control plane module present in the SDN controller

INTER-DC SOLUTION	YES	NO	YES	NO	NO
COUPLED PROVISIONING OF OPTICAL NETWORK AND IT RESOURCES	YES	NO	NO	YES	NO
ENERGY CONSUMPTION CONSIDERED	YES: Control plane extensions in OSPF and path computation algorithms to achieve it.	YES: energy efficiency of data centre network infrastructures	YES: focuses on high-performance, low-energy and low-cost optical interconnects across the different hierarchy levels in Data Center and high-performance computing systems.	YES: Data plane solutions expect to greatly reduce energy consumption. It is also a challenge that COSIGN provides aware network + IT services in intra-DC environments.	YES: It is carried out an energy efficiency evaluation of the INSPACE network solution

Table 1: Benchmarking of COSIGN related initiatives.

4 COSIGN architecture full list of requirements

Previous State of The Art (SoTA) review of related COSIGN initiatives provides with a good perspective on the added value that COSIGN architecture is committed to bring starting from the technologies and challenges stated in the DoW document. COSIGN WP1 working group together with WP2, WP3 and WP4 partners have also retrieved a complete list of requirements that it would be desirable to have in future DCN solutions. This survey extends the requirements that were already proposed in D1.1 [5]. To this target, a more extensive analysis of the use cases and a dedicated brainstorming session during the Bristol F2F meeting was carried out. The structure of the survey (business requirements, service requirements and infrastructure requirements) proposed in D1.1 has been preserved.

The compilation of requirements does not mean that all of them are going to be implemented in the COSIGN architecture. It is important to remark, that we aim to define the DC Network architecture of the future, so that independently of the feasibility to implement the requirements or not in today's DC networking solutions, it is interesting to have them in the survey. The objective is therefore, to provide a complete list of requirements that enable the later definition of the functionalities across COSIGN architecture layers.

To ensure a suitable full analysis of the requirements and the implications they may impose to the COSIGN architecture design, it has been provided a template (see Figure 1) aiming to cover as many aspects as possible to make the best of each of them. The proposed template is organized as follows:

1. Requirement description.
2. Identify the KPI(s) that will enable us to measure that we are accomplishing such requirement.
3. Impact: Which impact do these business requirements have? (HIGH, MEDIUM, LOW) for NG-DC design?
4. Novelty: Which is the novelty of the Business requirements? (HIGH, MEDIUM, LOW) for NG-DC design?
5. Required Functionalities: Provide (if possible) suggestions about possible functionalities required to accomplish each requirement and the architecture layer (Data, Control, Management, Application) in which such functionalities could be allocated.
6. Layer: Which layers are supposed to be affected and should take this requirement into account.
7. Related Data Plane (DP) requirements: WP2 needs to know what are the consequences (physical requirements) that upper layer requirements may impose on the Data plane. This is really an important field of the template that may contribute to overcome and minimize the gap between SW and HW layers while defining interfaces and workflows among them in WP2 and WP3 specially. Not only the requirements coming from the SW layers have a direct impact on the HW layer, thus, each of the requirements has been tagged with a specific colour depending on whether the requirement has a direct impact on the physical HW layer or not. The colour code is as follows:
 - Red: There are no direct HW implications.
 - Yellow: It is not clear if there are direct HW implications or not.
 - Blue: There are HW implications.

<Requirement code>	<Name> <Description>
KPIs	
Impact	
Novelty	
Functionalities	
Layer	
Related DP requirements	

Figure 1 Template for the survey of COSIGN architecture requirements.

The survey includes more than 50 requirements some of which have been already utilised by WP1 (see D1.2 [11]) and WP3(see D3.1 [6]) in the process of defining the specification of the the building blocks, interfaces and layers of the HW infrastructure, the control plane and orchestration levels as well as for the specification of the COSIGN architecture. The complete list of requirements can be found at the end of this document as an appendix.

5 COSIGN Layered Architecture and Functional Specification

This section provides the network architecture design of the reference COSIGN architecture. The architecture is discussed by identifying, describing and analysing the different layers, functional blocks and interfaces as well as the features and innovations that each layer brings to COSIGN infrastructure level. The physical layer (a.k.a, Data Plane layer) presents the scenarios and technologies that the consortium aims to deploy. The physical level analyses the 4 possible scenarios that have been proposed from a short, medium and long-term point of view. The Control Plane architecture is based on SDN technology and consists of multiple layers, with functional control blocks defined from a high level point of view with the relationship between them. The orchestration layer has been described together with its responsibilities and the main functionalities to coordinate the underlying COSIGN layers with the application/server layer while computing data transfer paths and configuring data plane devices to enforce the computed paths.

5.1 Physical layer

COSIGN novel optical components/devices are conceived to bring a number of added value features to DCN cloud environments aiming to meet the data plane requirements elaborated in D1.2 [11], develop the three short, medium and long terms physical scenarios and demonstrate them. These features include:

- Large and scalable top-of-the-rack (ToR) switches.
- Scalable, ultra-high capacity and ultra-low latency interconnections.
- High spatial dimensioning to support large port density as well as scalability of the architecture utilizing new data-com fibre technologies such as multicore fibres.

The novel features employed in COSIGN, bearing in mind the data plane requirements elaborated in D1.2 [11], will be introduced in this section. Three DCN physical architectures integrated with different technologies are proposed. In particular, short-term scenario consists of an electronic Ethernet switch with mid-board optics following the traditional layered architecture; its performance will be benchmarked to justify the benefit of involving the proposed optical technologies. The mid-term scenario proposes a flatten structure with large scale switch and fast switch combined with the electronic ToR switch. Last but not least, the long-term scenario aims to provide all optical server-to-server interconnection by introducing optical NIC and optical ToR switch.

5.1.1 Taxonomy of COSIGN physical resources features

The following technologies are conceived to build a flexible, scalable and cost efficient DCN architecture in COSIGN:

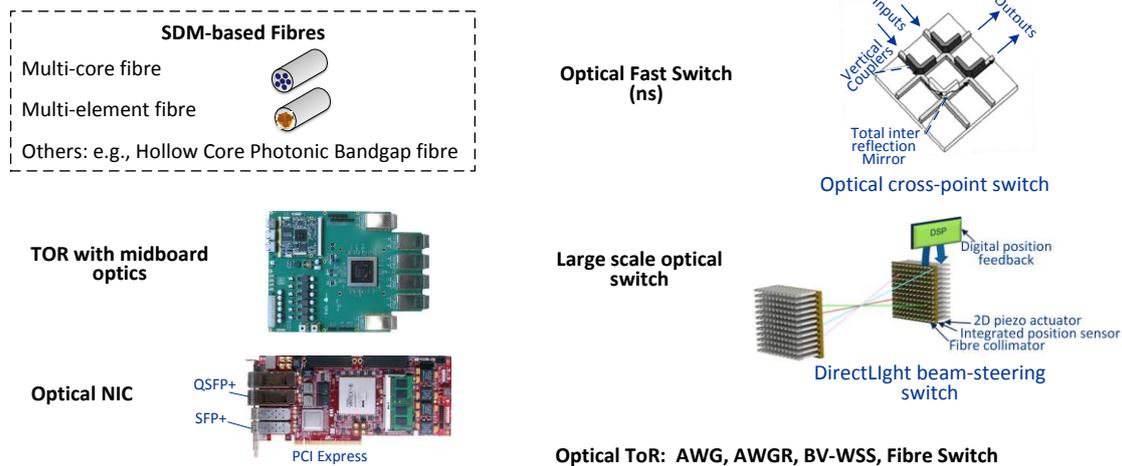


Figure 2 Devices to be employed in COSIGN DCN architecture

- High Radix optically enabled Ethernet switches using mid-board optics to allow reduced cost, power consumption and increased front panel bandwidth density.
- High spatial dimensioning and low latency optical fibre: the use of spatial division multiplexing fibres (e.g., multi-core fibre (MCF)) will reduce cabling complexity and allow dynamic build of logical networks on top of the installed physical infrastructure. In addition, improved end-to-end data latency can be achieved by replacing standard single mode fibres (SMFs) with hollow core photonic band-gap fibres (PBGFs).
- Highly-scalable core switching nodes: A flattened software defined meshed network topology is preferred for interconnecting ToR switches based on large port count and low loss free space 3D-beam steering optical switches. In this way, cluster switches can be eliminated by reducing east-west communication delays to reduce physical reconfiguration requirements. Optical circuit switch will also support port and matrix partitioning (hardware virtualization) to assist SDN based virtualization and slice isolation.
- Fast optical switch (OXS): fast optical switches with highly modular scalability will be investigated for optical packet and TDM switch in a synchronous intra-rack mesh network. This will double or quadruple the current scale. A novel modular scaling scheme is introduced. The PM MCF interface has never been implemented on optical switches before. It is likely that chip packaging costs will be reduced substantially by using this type of interface, as well as reducing the insertion loss significantly below those of the edge coupling modules.
- Optical NIC: NIC communicates with server through PCI-E interface (read/write data from/to RAM and disk) and could send out the data through optical interface (e.g., SFP+ and QSFP+) in various way (e.g., TDM and Ethernet).
- Optical ToR: Optical switch sits on top of the rack and integrates/switches optical connection from server to core switch, which is implemented based on AWG, WSS or fibre switch.

All the features described above and properly combined will mark very significant innovations in optical switching technologies.

5.1.2 Foreseen Data Centre physical scenarios/architectures

The different scenarios are designed based on availability of different technologies. Specifically, in the short-term scenario, the TU/e ToR electronic switch with on-board optics is employed to replace the traditional ToR switch but still follow the layered architecture. Therefore, the short-term solution is designed to align with the current DCN architecture and aims to increase the port count of a single ToR switch hence reducing the total number of switches in the entire network.

In the mid-term scenario, combined with TU/e ToR electronic switch, a more flattened architecture is designed with large scale optical cluster switch and fast optical switches is introduced to connect servers within the same rack. Comparing with the layered structure, an optical-enabled flattened DCN architecture could avoid the bandwidth bottleneck caused in the aggregation/core switch by increasing the connectivity of ToR switch and further reduce the traffic latency. In this scenario, the scalability of the optical switches is critical to meet production network requirements and control/management scheme also needs to be investigated.

In the long-term scenario, data intensive application will overwhelm the DCN and more bandwidth will be required to reduce cost and power, coming up with efficient VM-to-VM communication in cloud service. Instead, the power consumption of electronic switch with high processing capability would be an important limitation. Therefore, in the long-term scenario, besides large scale optical cluster switch and optical fast switch, optical NIC in server and optical ToR switch are employed to enable high capacity server-to-server optical connections, as well as much lower latency.

A. Short-term Scenario

The short-term scenario is built in a layered architecture (e.g., fat-tree) with electronic ToR switches provided by TUE. The design, fabrication and testing of a ToR switch will be carried out in this scenario. The hardware configuration of the ToR switch will support a dynamic reconfiguration of any number of channels. The on-board optical interfaces developed will be coupled to the ToR front panel through MPO (Multipath Push On) multi-fibre connectors providing maximum bandwidth density on the ToR front panel. The ToR design, having optical interfaces placed nearby the switch fabric IC, delivers a simplified and cheaper printed circuit board.

The performance of this scenario will be investigated in a benchmarking exercise to show the potential advantage of optical switch and SDN technology.

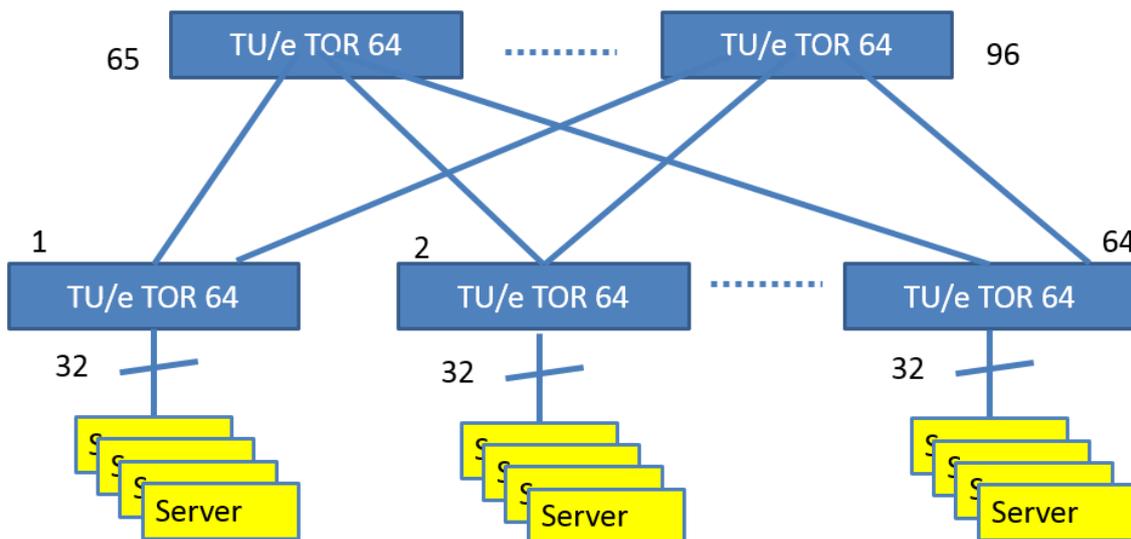


Figure 3 Short-term DCN architecture

B. Medium-term Scenario

Medium-term scenario shown in Figure 4 is designed as reconfigurable flat DC network based on high radix optical circuit switch and optical fast switch in combination with electronic ToRs. High radix optical switch is meant to improve the flexibility of ToR-to-ToR interconnection and optical fast switch (OXS) is used to enable optical TDM-based connection between servers within the same rack.

In COSIGN, we aim to scale the DirectLight optical matrix [15] switch size by at least 2x beyond the current SoTA with a target of 500x500 single mode fibre ports and also advance matrix resilience, energy efficiency and reduced cost per port. The scalability of the high performance OXS switches will be increased to 8x8 monolithically, potentially 16x16. Additionally, the ToR switches and

Combining Optics and SDN In next Generation data centre Networks

network switches are interconnected through spatial division multiplexing (SDM) based or low latency optical fibres, as well as the Mux/Demux components (as shown in Figure 5).

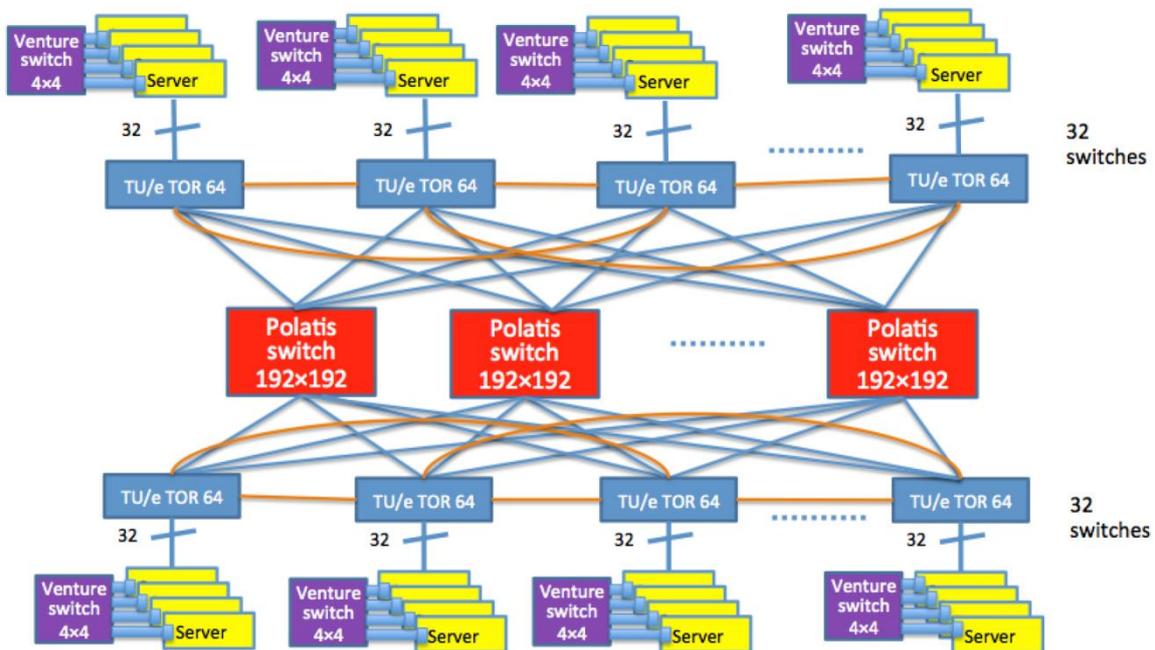


Figure 4 Medium-term DCN architecture

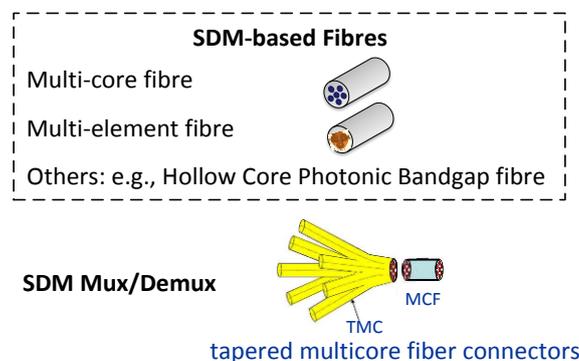


Figure 5 SDM-based fibres and Mux/Demux

This architecture supports a meshed ToR-to-ToR circuit connection through large scale Polatis switch and also there are some direct connection between ToRs (which improves the adaptivity of various traffic features, especially for the short-lived and mice flows). Polatis switch and TU/e ToR switch will be configured in per-flow basis. Also, optical NIC built in server could forward traffic in a time-slot way predefined by control plane and OXS could switch optical TDM packets in ns scale. In this way, the traffic between servers within the same rack will be extracted/offloaded from Tu/e's ToR switch whose load will be eased in large extent. So, comparing with the short-term scenario, we could have benefits in terms of traffic latency and network throughput.

C. Long-term Scenario A

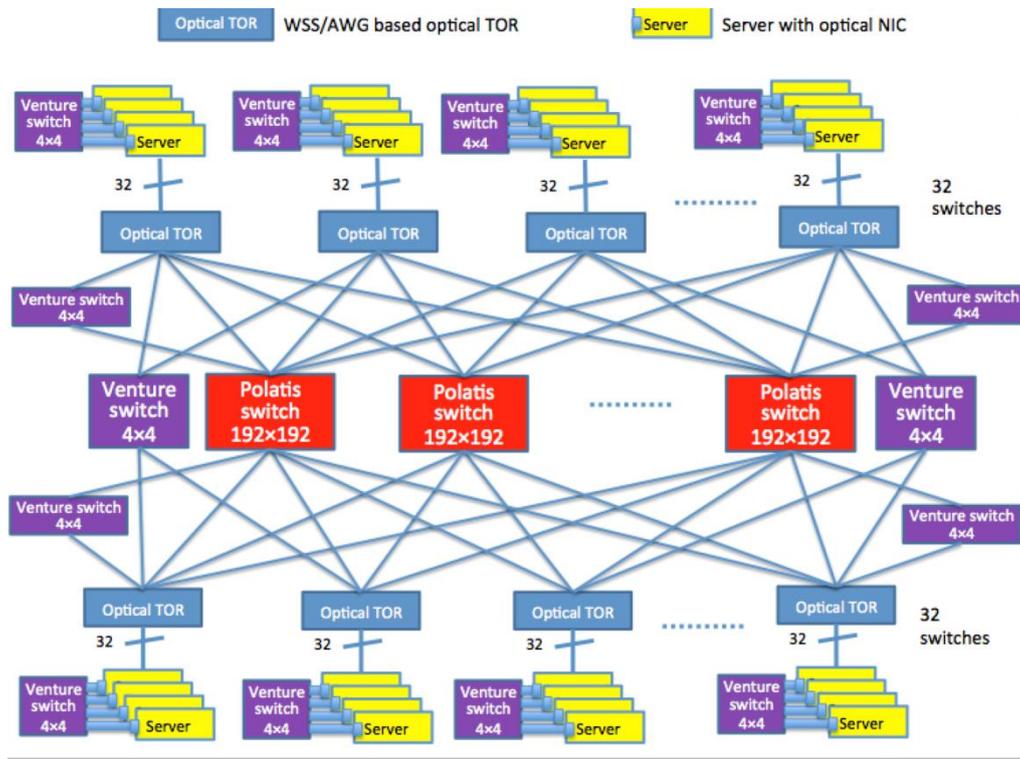


Figure 6 Long-term DCN architecture

In the long-term scenario, optical NIC and optical ToR are involved. With the above mentioned technologies, COSIGN designs a scalable, ultra-high capacity and low latency optical interconnection for intra-DCs communication. More specifically, the proposed intra-DC data plane architecture provides three different kind of server-to-server optical connection to adapt different service/communication requirements: optical TDM (OTDM) connection, optical packet/burst switching (OPS/OBS) connection and optical circuit connection (OCS).

Figure 6 depicts NIC with optical interface (Optical NIC) that will be widely deployed in future DC servers, and optical ToR switch are being used to provide circuit connection for intra- and inter-rack communication demands. In this case, optical ToR switch can be implemented with different devices depending on the networking scenarios, i.e., AWG(R) or Bandwidth Variable-WSS (BV-WSS) if WDM is considered in ToR to merge traffic from servers, or just fibre switch, or in a hybrid way. Complementary, fast optical switch can provide OTDM or OPS/OBS based switching to efficiently accommodate the short-term and bursty traffic between servers. Compared with an OPS/OBS based connection, the OTDM connection provides contention free transmission with guaranteed QoS. Furthermore, the Optical NICs need to be fully-programmable with hybrid function, i.e., supporting packet assembly under different working modes (circuit and OTDM/OPS/OBS). Figure 6 shows inter-rack connection that is implemented by a direct rack-to-rack circuit connection through a large scale fibre switch or OTDM/OPS/OBS connection with a fast optical switch. Furthermore, structure with cascaded fast and large scale switch also could be considered with improved connectivity re-configurability. In this way, according to the traffic flow characteristics, flexible server-to-server optical connection could be provided by a flattened intra-DC network. Also, the introduction of parallel fibre connectivity overcomes great challenges of the cabling engineering, and COSIGN introduces spatial division fibres (which have higher port/bandwidth density and cost efficiency) to resolve this problem, interfacing via a spatial mux/demux component. At the same time, new alternative fibres with attractive characteristics (e.g., lower propagation latency) are also investigated.

D. Long-term scenario B

In this final scenario, we are moving beyond the fat-tree architecture and aim at evaluating different network configuration options. A ring network structure, like the one shown in Figure 7, is preferable to achieve robust connectivity. Switching at various networking layers is necessary to address the demand in future DCs for high bandwidth, high flexibility, scalability and robustness. In order for a DC to be maintainable, extensible, scalable and fault tolerant, it is required that physical infrastructure is architected in a well-defined modular way.

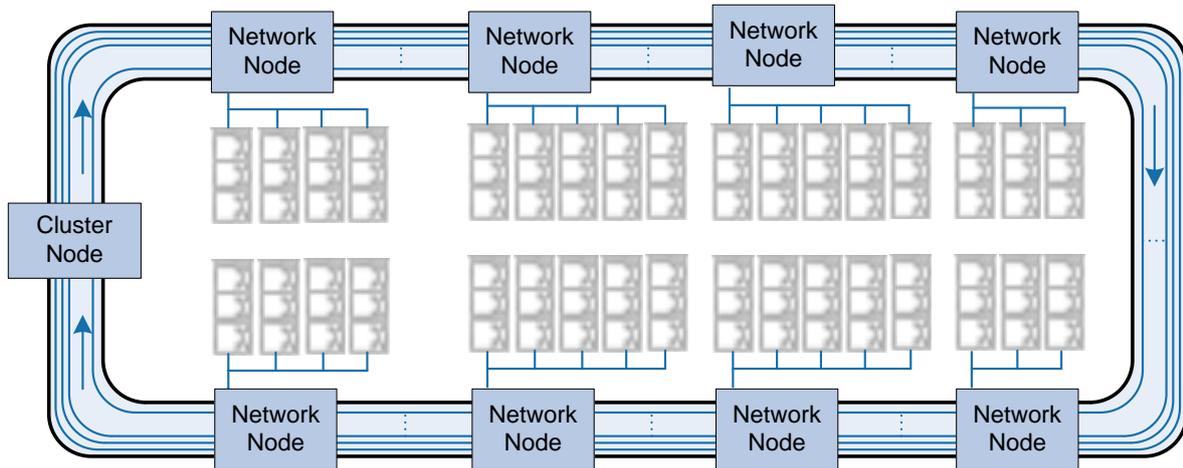


Figure 7 Generic data centre ring network

Each network node serves a number of racks, where each rack contains a number of servers (e.g. running Virtual Machines) and a ToR switch. ToR switches are connected to network nodes through fibres or multicore fibres, when required. The ring network interconnects network nodes through multicore fibres, thus forming a cluster. Clusters can be interconnected through the Cluster node, often duplicated for resiliency and typically connected in a ring, tree, star or mesh topology. An example of a self-healing ring cluster interconnect is illustrated in Figure 8.

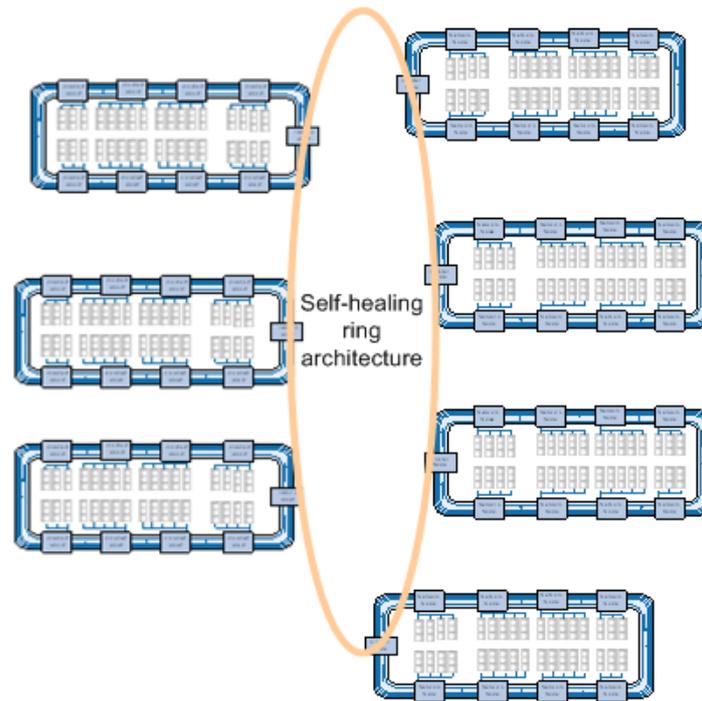


Figure 8 Cluster nodes interconnected by self-healing ring

Figure 9 provides a more detailed view of a Network node, where all switching layers are represented. At the lowest layer, switching at multi-core granularity is performed. On the next level, fibre switching is executed, which allows switching between cores in the multicore fibres, as well as add/drop of fibre cores to the wavelength switch. The next level up performs switching at wavelength level and may allow wavelength conversion. The higher top layer provides TDM and/or packet switching functionality, allowing sub-wavelength granularity by using circuit or packet based paradigms. The reasoning behind TDM capabilities requirement is to allow all-optical top-to-bottom transmission using optical timeslots. However, packet switching could also provide that type of connectivity and accommodate traffic burstiness on smaller time-scales.

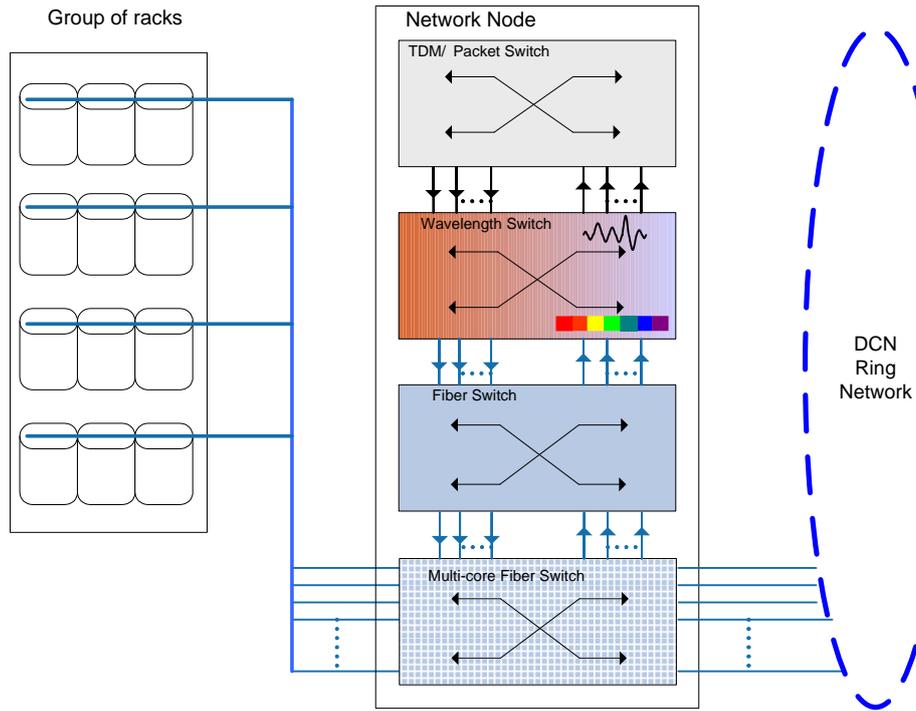


Figure 9 Network node

Each network node in the ring is equipped with different layers of switching granularity, such that switching capabilities do not need to be available at all nodes. Figure 10 illustrates end to end connectivity for a TDM connection which traverses several switch nodes. To optimise energy consumption and cost, it is desirable to switch at the lowest possible layer and only perform switching at higher granularity when and where necessary.

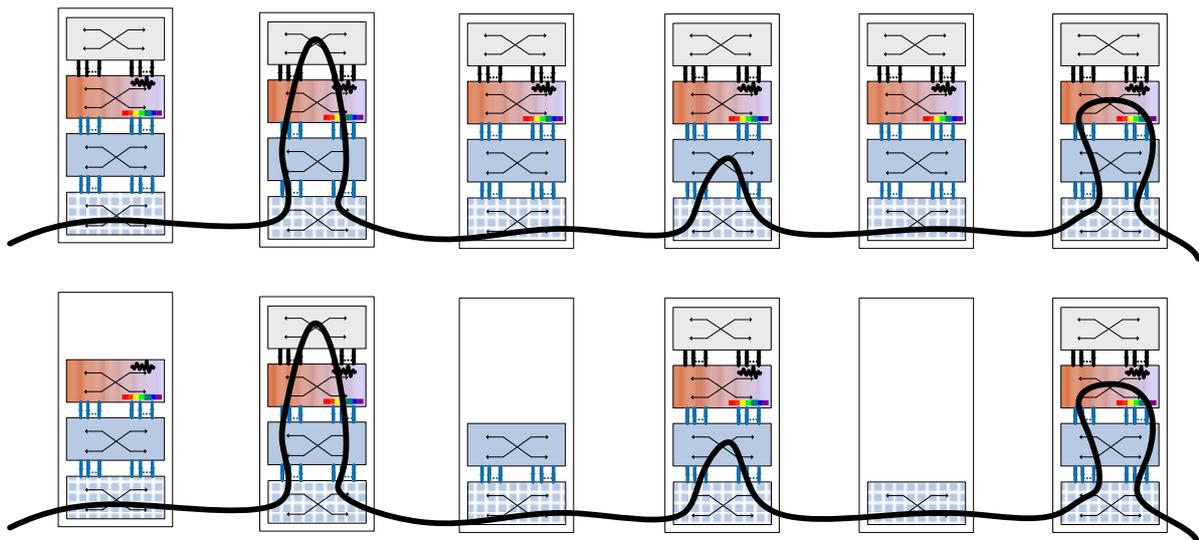


Figure 10 Example connection crossing several layers

As a summary, **Table 2** presents a roadmap of our data plane infrastructure demonstration.

Scenarios	2015	2016
Short-term scenario	Finish the first prototype of electronic ToR switch and system demonstration.	Improve the function of the device.
Medium-term scenario	Besides the ToR switch, finish the first prototype of novel fibres, fast and large-scale cluster switch.	Improve the function of each device/component and demonstrate the integrated scenario.
Long-term scenario A	Besides the devices/components in medium-term scenario, finish the prototype of optical NIC.	Improve the function of each device and demonstrate the integrated scenario.
Long-term scenario B	Develop the hierarchical optical network node and demonstrate its functionality.	Demonstrate ring topology comprised of hierarchical optical network nodes.

Table 2 Roadmap of the scenario demonstration

5.1.3 Orchestration, Management and Control aspects of physical resources

To enable the SDN-based control and management of the physical resources, novel features of the physical infrastructure should be abstracted and exposed to the control plane in a generic way. The features to expose includes:

- different features of optical switches
 - large scale cluster switch: expose as a port based switch
 - fast optical switch: expose as a time slot-based or optical label-based switch
- optical channels: optical TDM or OCS channel
 - channel abstraction/definition
 - TDM: path + {start_time_slot and granularity}
 - OCS: path + bandwidth
- monitoring information
 - hardware failure event, e.g., optical port
 - performance of optical channel/path/link

5.2 Control layer

The COSIGN control layer is based on the Software Defined Networking (SDN) principles, which allow to cope with the dynamic and highly variable profiles of the DC traffic through a fast and coordinated reconfigurations of the DCN data plane. The DCN programmability is key to achieve the effective convergence between the DC cloud environment and the network which interconnects the

servers, through automated procedures which integrate the deployment of the VMs with the instantiation of the associated virtual network topologies.

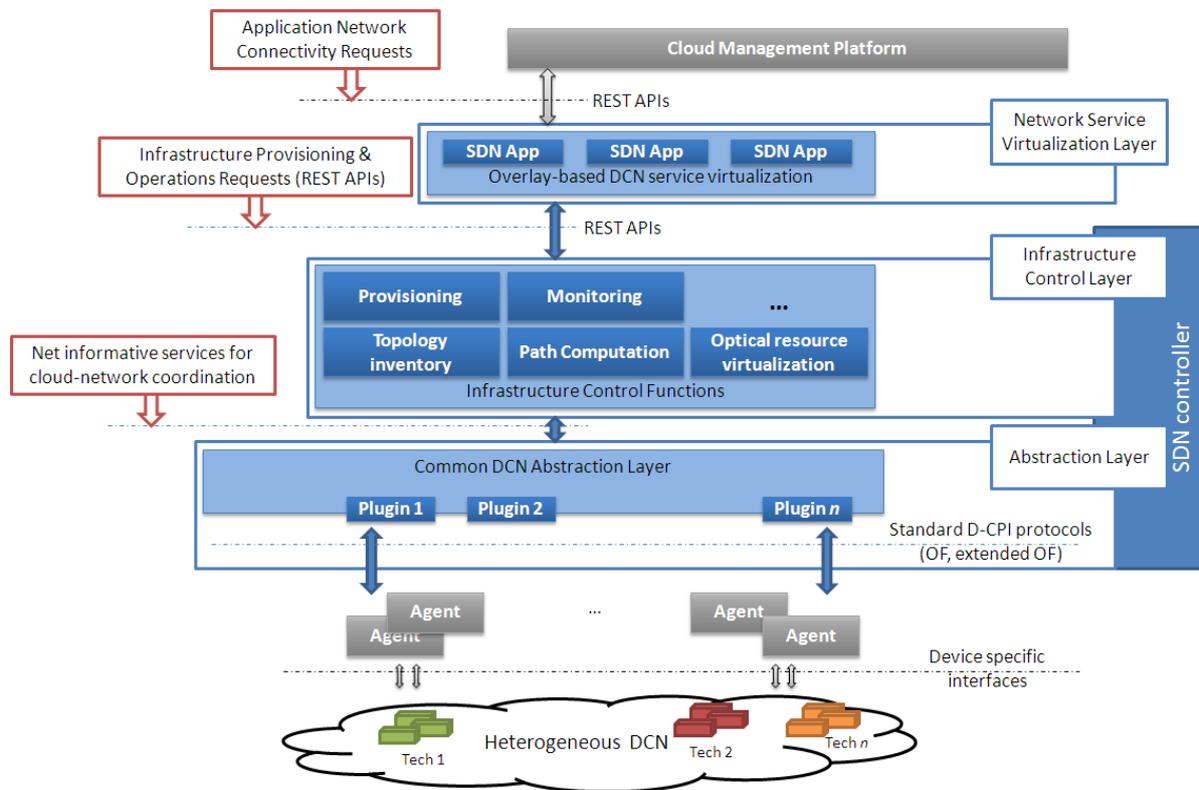


Figure 11 – COSIGN control plane architecture and services

The COSIGN control plane architecture, detailed in deliverable D3.1 [2], is shown in Figure 11, with its three main layers:

- **Abstraction layer:** provides commands and notifications to interact with the COSIGN optical data-plane through a unified DCN information model. In particular, the abstraction layer provides common mechanisms to retrieve the capabilities of the optical devices deployed in the data plane, to configure them and collect their alarms or statistics. The abstraction layer is structured in several protocol-specific drivers, implementing the OpenFlow extensions defined for each COSIGN data plane technology.
- **Infrastructure control layer:** provides the basic network functions for virtualization of optical resources and dynamic provisioning of optical connectivity. These functions are implemented through internal modules in the SDN controller, for example a topology manager, a statistics manager, a connection provisioning manager, etc. which interact to setup dynamic intra-DC paths and build virtual slices coexisting over the DCN. The high-level services implemented in the SDN controller are exposed through the A-CPI using REST API and they can be consumed by further SDN applications at the control layer, but also by the cloud orchestrator.
- **Network service virtualization layer:** provides the overlay-based network virtualization, with traffic encapsulated at the end points and tunnelled across the DCN. It is implemented through an SDN application which configures directly the network edges but makes usage of the SDN controller internal functions to establish dynamically the required optical connectivity inside the network boundaries. This interaction allows the cooperation with the infrastructure control layer, enabling the exchange of information between the two layers and their mutual adaptation, overcoming the limitations of the simple overlay-based virtualization.

5.2.1 Preliminary functional blocks of the control layer

Deliverable D3.1 has specified the functional components of the COSIGN control layer. Figure 12 provides an overview of the main components, their positioning in the control plane and their interaction.

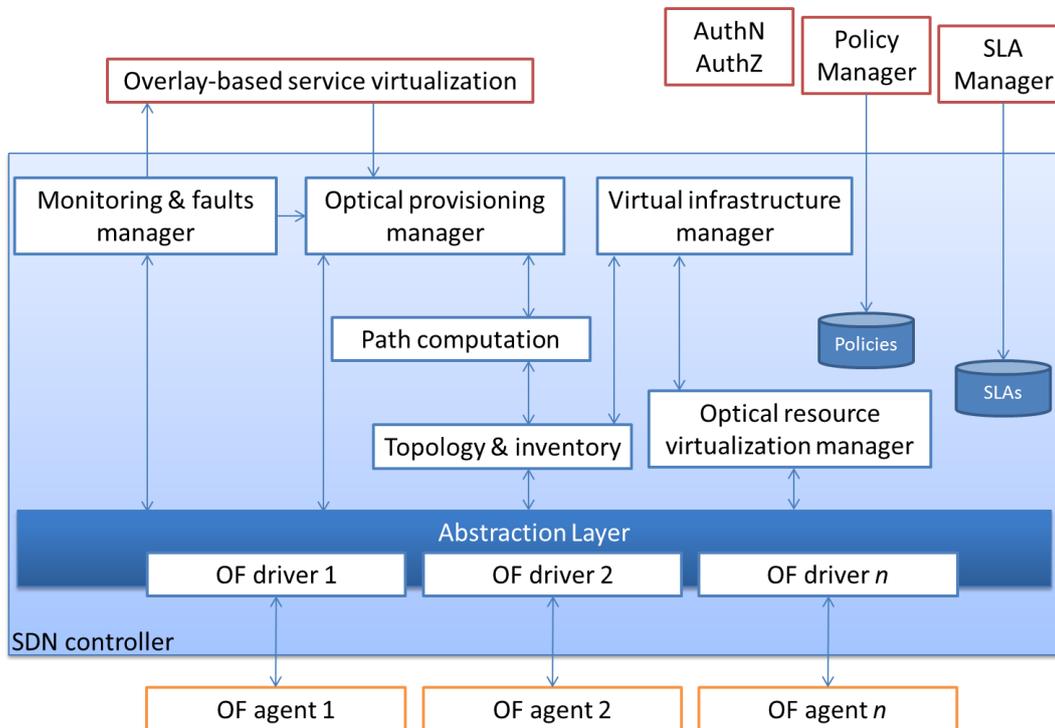


Figure 12 – COSIGN control plane functional blocks

The entities which implement the main control plane services within the SDN controller are the following:

- **Optical Provisioning Manager:** provides the mechanisms to setup and delete intra-DC optical connections between servers with QoS guarantees. It invokes the **Path Computation** block to request the computation of optical paths with a set of constraints (defined by the operator policies and the customers' SLAs). These paths are computed over the DCN topology exported by the **Topology & Inventory** component, able to describe the optical characteristics of COSIGN data plane. For each path, the Optical Provisioning Manager configures the required cross-connections on each node of the physical DCN, using unified commands exposed by the **Abstraction Layer** to interact with the data plane. The Optical Provisioning Manager is also responsible to coordinate the recovery of the services in case of failures, which are notified through the monitoring component.
- **Virtual Infrastructure Manager:** provides a service to compose and deliver virtual optical slices with specific capabilities and topologies. The physical topology of the DCN, represented through the **Topology & Inventory** component, is partitioned in isolated logical network infrastructures composed of a set of interconnected virtual nodes. The management of the single virtual resources is handled through the **Optical Resource Virtualization Manager**, which manages and abstracts the specific constraints of the optical technology, mapping the commands for the logical resources to the corresponding configuration of the physical network.
- **Monitoring & Faults Manager:** collects, stores and distributes information about status, statistics and alarms for the different physical nodes of the DCN. This service is consumed by

other SDN controller components (e.g. the Optical Provisioning Manager) or by external SDN applications via REST APIs.

All the functional blocks which need to interact with the data plane use a unified interface exposed by the **Abstraction Layer**, with primitives to send commands, retrieve capabilities information from the DCN nodes and subscribe for notifications about alarms or change of status. The translation between these primitives and the corresponding OpenFlow messages exchanged on the south-bound interface between physical nodes and SDN controller is handled by several **OpenFlow drivers**, dealing with the specific protocol extensions defined for each category of optical devices. On top of each node at the data plane, an **OpenFlow Agent** acts as mediator between the SDN controller and the specific device, implementing the vendor specific protocols used to interact with the device itself.

The overlay-based network virtualization is provided through a dedicated SDN application which runs over the SDN controller. It interacts with the Optical Provisioning Manager to request the on-demand creation of optical connections, as required to support the underlying connectivity for the overlay networks built above. On the other hand, it may receive information from the Monitoring & Faults Manager to take decisions which take into account the status of the physical DCN.

Other SDN applications, mainly with a management scope, are also placed on top of the SDN controller. One of these applications (AuthN/AuthZ) manages authentication and authorization to permit a secure access to the different actions available on the physical DCN or on its logical partitions. Other applications allow the DCN administrator to configure the operator policies and the SLAs for the different customers in the SDN controller.

5.2.2 Functional blocks features and innovations

The following table summarizes the innovative features that will be implemented in COSIGN.

Functionality: Multi-technology optical resource virtualization
Functionality description
Heterogeneous physical resource from COSIGN DCN is virtualized to provide elementary and abstract virtual optical resources which can be combined to create complex infrastructures.
Involved SD-CP functional blocks
- Optical Resource Virtualization Manager - Abstraction Layer - OpenFlow drivers and agents
Input
Creation of virtual resources: capabilities and characteristics of physical optical resources. Configuration of virtual resources: configuration commands for the virtual resource.
Output
Creation of virtual resources: capabilities and characteristics of the corresponding virtual optical resources. Configuration of virtual resources: configuration commands for the corresponding physical resource.

Table 3 Innovative functional blocks in the control layer (1)

Functionality: Provisioning and management of virtual optical infrastructures
Functionality description
Composition and delivery of on-demand and isolated virtual network slices.
Involved SDN-CP functional blocks
<ul style="list-style-type: none"> - Virtual Infrastructure Manager - Topology & Inventory - Monitoring & Faults Manager - Optical Resource Virtualization Manager - Abstraction Layer - OpenFlow drivers and agents
Input
Specification of the desired virtual slice, e.g.: <ul style="list-style-type: none"> - topology - bandwidth capacity - expected traffic profiles - resiliency - elasticity rules and thresholds - programmability options
Output
Result of the virtual slice provisioning action, with details about the delivered virtual infrastructure and how to access it.

Table 4 Innovative functional blocks in the control layer (2)

Functionality: Provisioning and management of intra-DC optical connectivity
Functionality description
Computation and setup of intra-DC optical paths to provide underlying connectivity between DC servers over the physical DCN.
Involved SDN-CP functional blocks
<ul style="list-style-type: none"> - Optical Provisioning Manager

<ul style="list-style-type: none"> - Path Computation - Topology & Inventory - Monitoring & Faults Manager - Abstraction Layer - OpenFlow drivers and agents
Input
Specification of the desired connectivity: <ul style="list-style-type: none"> - connection type - end-points - QoS parameters - service resiliency (optional) - monitoring information (optional) - time constraints (optional)
Output
Result of the connection provisioning.

Table 5 Innovative functional blocks in the control layer (3)

5.3 Orchestration layer

As previously described in section 5.1, the physical layer of the DCN is responsible for transferring data between network clients and control layer is responsible for computing data transfer paths and configuring data plane devices to enforce the computed paths. The orchestration layer is responsible for feeding the control plane with high level application information required to optimize the computation data transfer paths taking into account also the IT resources. This way, the overall DC goals are achieved, be it global policies, workload or tenant specific performance requirements, etc.

While the physical layer described in Section 5.1 and control layer described in Section 5.2 mainly look after the networking domain, the orchestration layer also comprises the DC management stack and takes decisions which involve both the DC resources (compute, storage, etc.) and the network. Figure 13 shows the position of the orchestration layer above the infrastructure controllers of the compute, the storage and the SDN-controlled DCN.

Thanks to its position in the COSIGN architecture stack, the orchestrator owns a clear perspective on the infrastructure layers of the architecture. This fact enables the orchestrator to match the application layer requirements with the DC infrastructure resources.

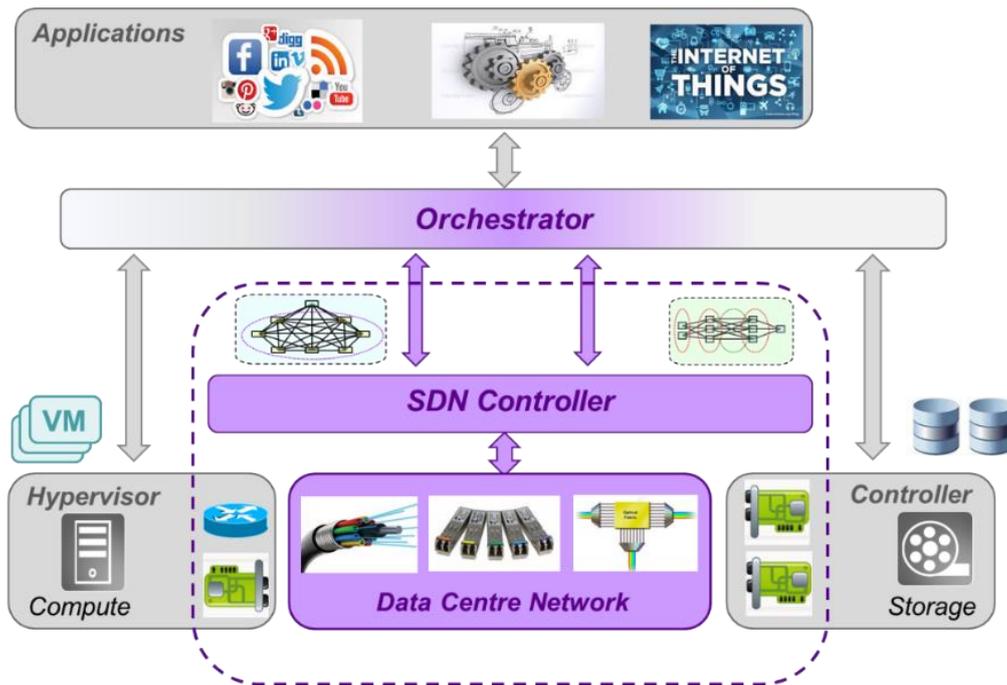


Figure 13 – DC Orchestration layer – position and functionality

In typical data centres today, e.g. in public cloud environments, the application layer is very dynamic and is composed of many multi-component workloads with varying communications requirements. There is no single application pattern that can be used for static or semi-static decisions regarding, for example, bandwidth allocation. Therefore, the orchestrator must dynamically monitor the infrastructure-level and the application-level KPIs and adjust the resource allocation decisions to meet them optimally.

The orchestrator requires from the full visibility and control into the entire infrastructure silos – the compute, the storage and the network; meaning to be aware of availability and utilization level of the compute, compute-storage network proximity and availability of the network links. This is a must, for instance, in order to guarantee that the orchestrator takes the optimal decisions regarding the placement of the application components and data. In order to perform the decisions, the orchestrator must be capable of commanding the infrastructure controllers through well-defined technology independent interfaces. Generic functional layers of the orchestrator layer are as follows:

- **The internal control and optimization engine.** This is the heart of the orchestrator which owns the full underlying infrastructure view. The orchestrator engine comprises the functionalities that enables matching the application level resource requirements to the infrastructure level resource capabilities.
- **The application/client (north-bound) interfaces.** Northbound interfaces are responsible for accepting the application/client layer requests and hold the service and business logics. The type of expected requests highly depends on the type of application. For instance, considering the proposed COSIGN use cases, such request may range from a parametrized application template for application provisioning request to a full VDC description for a case of virtual infrastructure provisioning.
- **The infrastructure (south-bound) interfaces.** There are two generic types of interaction with the infrastructure layer, namely monitoring (south-to-north interaction) and control (north to south interaction). The former retrieves the infrastructure resources' monitored information and feeds it to the orchestration layer to facilitate the decision making process and to realize some business logic scenarios, e.g. billing, SLA controls, etc. The later type of interaction required, the control, flows from the opposite direction: the orchestrator pushes the

configuration rules towards the infrastructure control layer to enforce the required behaviour of all the controllable infrastructure aspects to match application layer expectances.

The interfaces must be flexible enough to serve a wide range of applications and use cases, while capable of harnessing the unique capabilities of the COSIGN physical fabric based on optical and photonics technology.

5.3.1 Preliminary layers and functional blocks of the COSIGN orchestration layer

Preliminary architecture of the COSIGN orchestrator is specified as part of D4.1 and outlined in Figure 14. There are three major architectural layers – the layer interfacing the DC workloads/clients, the layer interfacing the infrastructure devices/controllers and the layer implementing the orchestrator functionality for continuous monitoring the infrastructure and workload KPIs, as well as continuous matching of the application level resource requirement to the infrastructure level resource capabilities.

- **Client Facing Interfaces** layer of COSIGN orchestrator is designed to hold components interfacing the different types of clients – the **Application Blueprints** component to interface with application provisioning requests, the **VDC Requests** components to interface with the virtual infrastructure provisioning requests and the **KPIs** component to interface with the DC administration and operation requests.
- **Data Models, Algorithms, and Decision Making** layer of COSIGN orchestrator is responsible for main orchestrator functionality and includes the **Admission Control** component that makes decisions regarding embedding new workloads and jobs into the infrastructure, the **Provisioning** component that makes placement decisions and resource allocations for admitted workloads and the **Periodic Adjustments** component that monitors the KPIs of both the DC and the workloads and modifies the resource allocation and/or configuration decisions when required.
- **Infrastructure Control Clients** layer of COSIGN orchestrator is responsible for the interface with the infrastructure, across all the types of resources and includes the **Compute** component for the compute interface, the **Storage** component for the storage interface and the **Network** component for DCN interface.

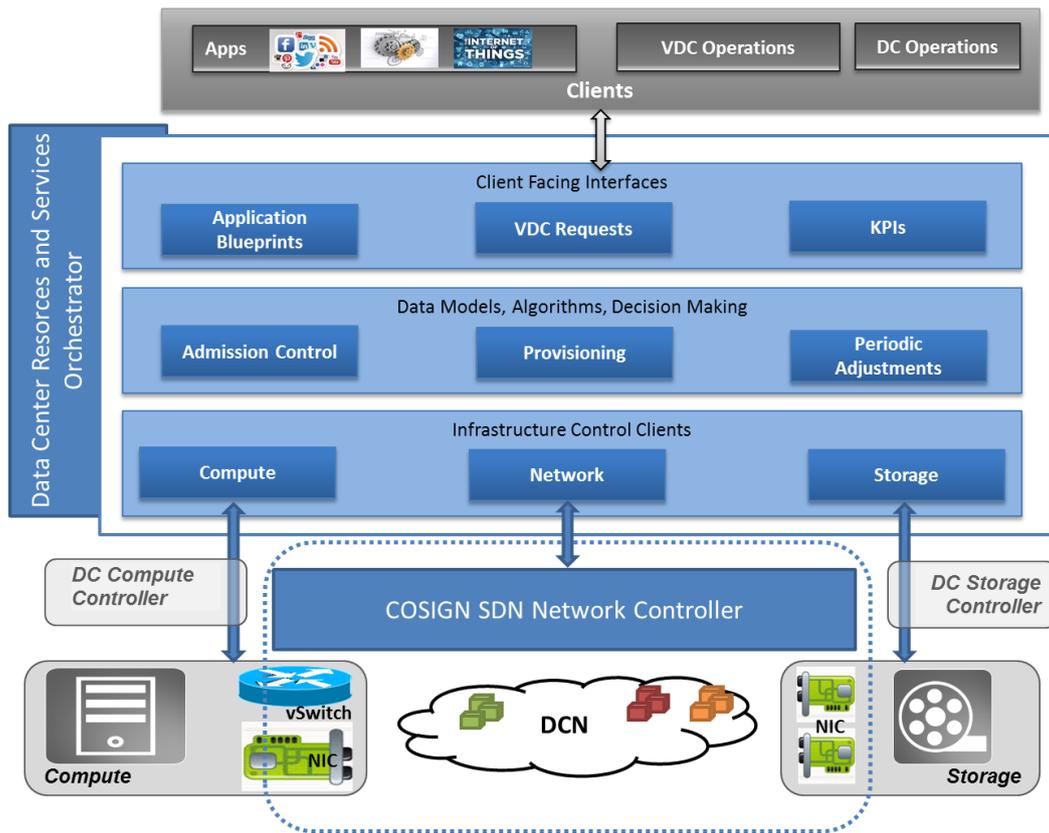


Figure 14 – COSIGN Orchestration layer – functional blocks and interfaces

5.3.2 Functional blocks features and innovations

Functionality: Workload-level DCN demand specification.
Functionality description
Allow for specifying workload and client requirements towards the network in high level, technology independent and application domain terms.
Involved functional blocks
- Application Blueprints - VDC Requests
Input
High level description of application or VDC components and their communication requirements – connectivity patterns, QoS, network services, etc.
Output
Workload placement decisions are made through considering networking aspects and the networking infrastructure is automatically reconfigured as part of workload provisioning

Table 6 Innovative functional blocks in the orchestration layer (1)

Functionality: Dynamic DCN re-provisioning.
Functionality description
Allow DCN re-provisioning triggered by monitoring data from the DCN and the application domains.
Involved functional blocks
- Periodic Adjustments
Input
Monitoring and KPI data collected from the infrastructure and, where possible, from the application hooks.
Output
DCN resource re-provisioning to optimize the usage, e.g. configuring fast optical circuit to eliminate congestion.

Table 7 Innovative functional blocks in the orchestration layer (2)

Functionality: Integrated ICT orchestration
Functionality description
Allow DCN re-provisioning triggered by automatic DC-wide features like application and service elasticity, storage transfers, etc.
Involved functional blocks
- Provisioning
Input
Explicit elasticity settings and policies, coupled with the application-level events like sudden load increase
Output
DCN resource re-provisioning to satisfy application-level policies, e.g. configuring fast optical circuit for upcoming storage transfer or expanding virtual network to grow application cluster.

Table 8 Innovative functional blocks in the orchestration layer (3)

6 Architecture inter-Layer Interfaces Preliminary Specification

Section 6 defines the interfaces between the different layers (e.g. Control plane - Data plane and Control plane - Orchestration plane) and the relationship between them from a high level point of view. The heterogeneous data plane requires a suitable southbound interface at the network control plane which allows to discover, manipulate, configure and monitor the new types of resources, in order to exploit their capabilities, connection granularity and dynamicity. On the other hand, the interaction between network controller and orchestrator needs to rely on a powerful interface to provide an access to the control plane services with abstract primitives that hide the data plane technology details but expose network programmability and monitoring with a sufficient level of details. A first high level specification of the interfaces as the means to request for services and configure and manage the DC network is next presented. Nevertheless, A full specification of such interfaces, including protocols, workflows specification will be provided in D3.2 (SDN framework north-bound and south-bound interfaces specification) and D4.2 (COSIGN orchestrator low level architecture and prototype design).

6.1 Control plane and Orchestration layer interface

The interface between the control plane and the orchestration layer scheme is represented in Figure 15. It includes all the mechanisms used by the Orchestration layer, through the Cloud Management Platform, to request services on the datacenter network or collect information about the network infrastructure which may be used for decisions at the whole datacenter level. The interface is typically based on REST APIs which support CRUD operations on network related resources.

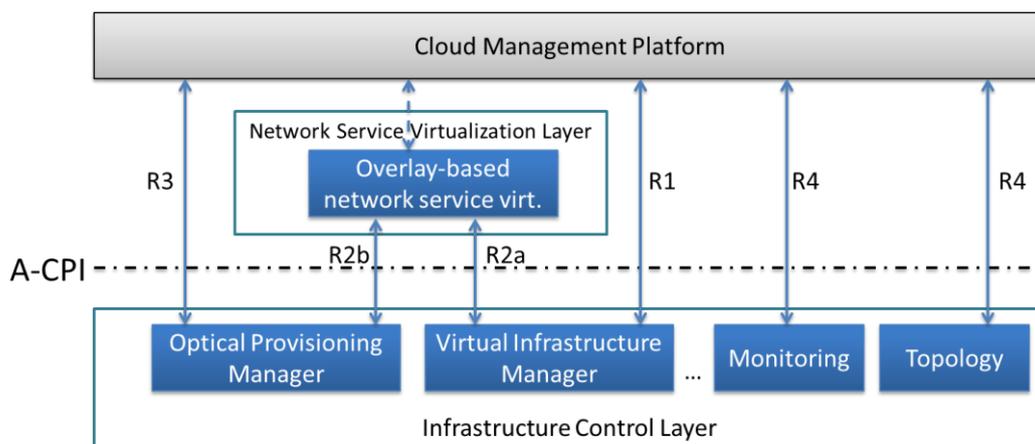


Figure 15 – COSIGN CP functional blocks. Interaction with orchestration layer.

We can identify the following main interactions:

- A. **Request for customized virtual networks.** This type of request is used to provide and manage the network part of an IaaS offer and it is typically invoked by the Neutron component at the Cloud Management Platform. The request can be directed to the SDN application for the provisioning of overlay-based virtual networks or to the Virtual Infrastructure Manager within the SDN controller, depending on the request type. A request which maps the basic concepts of Neutron resource (e.g. network, subnets, ports, routers) is typically served through overlay virtualization. A request for a complex virtual topology which specifies requirements in terms of optical capabilities must be handled by the Virtual Infrastructure Manager and mapped on a proper virtual network slice.

- B. Request for dynamic optical connectivity within the datacenter.** This request, when triggered by the orchestration layer, is usually associated to the setup of optical paths to support management actions at the datacenter level, e.g. the replication of VMs between different servers which requires the transfer of a large bulk of data. In this case it is typically invoked by internal management functions in different OpenStack components and, at the control plane level, it is handled by the Optical Provisioning Manager.
- C. Collection of information about the datacenter network.** This interface allows the orchestrator layer to retrieve details about the behavior of the underlying network, which can be used in internal decisions to optimize the usage of the whole datacenter resources or to react to unexpected behavior at the network level. DCN related information covers different aspects of the network, for example failures, status of the devices, level of congestion in some network segments, power consumption, but also topology details like nodes and links, even if highly abstracted. The control plane entities which expose this type of information are the Monitoring & Faults Manager and the Topology & Inventory components respectively. Beyond the REST mechanism to collect data polling a resource with a GET request, the interface should also support subscriptions and notifications (e.g. via web sockets) for asynchronous notifications about alarms and failures.

6.2 Control plane and data plane interface

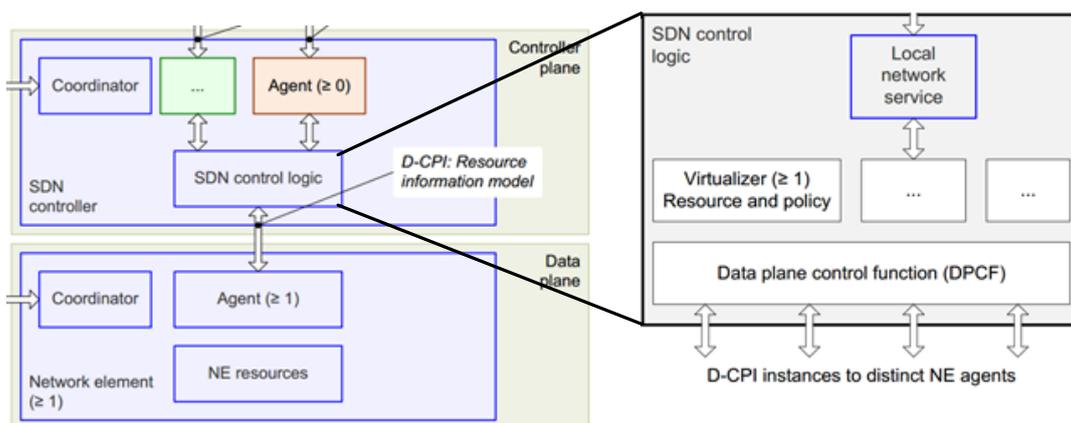


Figure 16 Control Plane and Data Plane interface defined in SDN architecture

According to the definition in [10], the interface between data and control planes (D-CPI) includes functions such as:

- Programmatic control of all functions exposed by the Resource Database (RDB)
- Capabilities advertisement
- Event notification

A controller-agent model is appropriate for the relation between a SDN controller and a controlled entity. The controlled entity is a designated agent, a functional component that represents the client's resources and capabilities. It is also responsible for carrying out the commands of the controller and notifying the controller of events in categories specified by the controller. The Network Element (NE) provides at least one logical data-controller plane interface (D-CPI) that allows its functions to be managed and controlled by the SDN controller, as shown in Figure 16.

The data plane agent is the entity that executes the SDN controller instructions in the data plane. At the lowest layer of recursion, data plane resources are physical entities (including soft switches). At higher levels of abstraction, however, data plane resources need not be physical (e.g., virtual NEs). Similarly to the other planes, the SDN architecture operates on an abstract model of the data plane and

as long as the functions advertised by the model are correctly executed, the architecture is blind to the difference. In the data plane, a resource data base (RDB) models the current information model instance and the necessary supporting capabilities of the NE. These data plane resources are represented as a set of virtual NEs (VNEs) through D-CPI. Different data plane agents represent data plane function abstraction in different abstraction level or different scale.

6.3 Orchestration layer and Service/application layer interface

Figure 17 shows how the orchestration and the services layers interact with the lower and upper layers. The Orchestration layer coordinates the provisioning and management of data center resources (i.e. compute, storage, and network) in order to provision cloud services to the customer. Additionally, the orchestrator (the entity comprising the orchestration layer) may perform management of the data center resources for optimization and efficiency purposes. The *service layer* includes functional entities that do not necessarily coordinate data center resources, but still provides required functionality such as informative service, billing or other management services. In order to fulfill its purpose, the orchestration layer interacts with the different resource controllers.

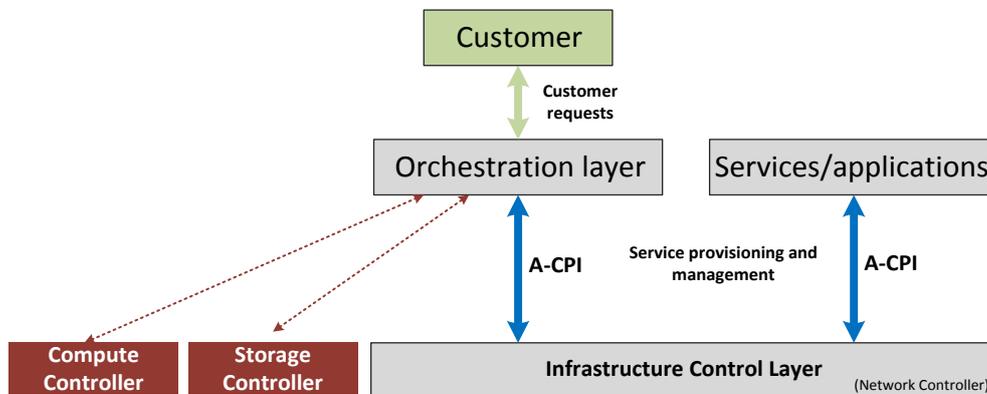


Figure 17 Interfaces for the orchestration and services layer

The network controller, which is generally referred as the *Infrastructure Control Layer*, enables programmatic control of abstract network resources through a set of APIs exposed at the A-CPI (Application-Controller Plane Interface). The programmatic control of network resources may comprise services for provisioning of network resources (e.g. optical connectivity, optical slices), services for policy and SLA configuration, informative services (monitoring data), etc. Using the A-CPI and the interfaces towards the other resource controllers (i.e. compute and storage) the orchestrator realizes the coordinated provisioning of cloud services to the customers. The message sequence chart in Figure 18 shows a high level interaction between various entities for the purpose of provisioning cloud services to customers. As it can be noticed in the figure, the orchestrator receives the customer's request and further provisions the required DC resources using the capabilities exposed by the resource controllers (compute and network).

Similarly, the services layer consumes the APIs exposed at the A-CPI in order to realize their functions. It is important to emphasize that the A-CPI provides capabilities for event notification. This would enable various services to receive notifications about network events and react to them accordingly.

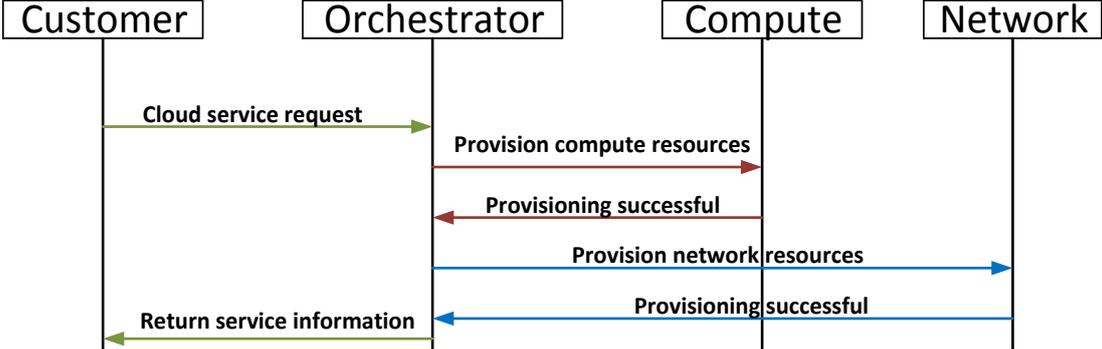


Figure 18 High level interaction with the orchestrator

7 COSIGN service delivery model

In this section it is analysed a list of involved actors and roles suitable to be adopted in the context of COSIGN and it is provided an overview on the overall services delivery model phases which enable to validate the proposed architecture framework.

7.1 COSIGN service model actors and roles

A role names the behaviour of an entity participating in a particular [13] context and generally is used to identify it [14]. A role groups a set of responsibilities and actions that are associated with a resource of a given service provisioning state. Roles are completely disjoint. An actor is a given materialization of at least one role, although it can cope with one or more roles simultaneously into a single entity. It may be the case that roles and actors match 1-to-1 and some other situations in which an actor adapts several roles depending on the type of service provided.

7.1.1 COSIGN roles:

SDN based technologies, virtualization and service abstraction implemented in COSIGN within its layered architecture enables to define a number of roles that COSIGN actors can adopt. The following roles have been identified:

- Data Centre Physical Infrastructure Provider (DC-PIP) owns the physical infrastructure (both IT and networking resources) and makes it available to others with the final aim to gain revenue from it. It owns and manages one or more datacentres to provide virtual infrastructure services (i.e. IaaS services) to its customers (e.g. DC virtual operators).
- Network operator: the provider of network services for connections between datacentres located in different sites. Depending on the scenario, the network operator and the datacentre operator roles may be covered by the same actor.
- Data Centre Virtual Infrastructure Provider (DC-VIP) acts as a virtual infrastructure resource broker, responsible for combining IT and Net virtual resources and provides Virtual Infrastructures as a Service (transfers the control rights over it).
- Cloud service provider (Cloud-SP): it provides a cloud services to its customers, relying on its own physical infrastructure or on a rented virtual infrastructure.
- Cloud service customer: represents the consumer of a generic cloud service and establishes an SLA with the cloud service provider. It may be an enterprise customer or a final end-user.

Roles combine between each other depending on the type of service to be provided. Each role provides a further step in the chain value towards providing the final service. Figure 18 shows the stack of potential COSIGN roles interrelation matching the proposed architecture and services described at each of the interfaces in section 6.

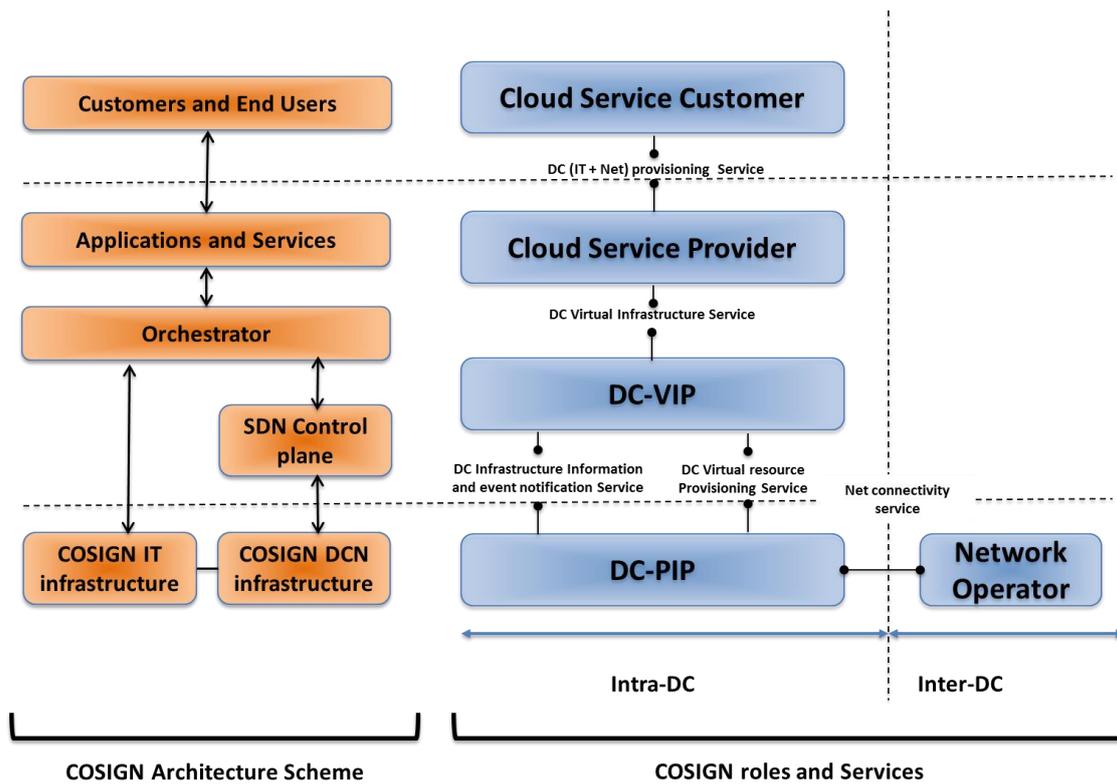


Figure 19 COSIGN architecture and roles relationship

7.1.2 COSIGN actors:

It is possible to define the actors involved in the context of future DCN environments based on the architecture specification and previous roles.

- **DC Operator:** Infrastructure provider relying on its own physical infrastructure and performing physical DCN and IT resources partitioning and virtualization. Integrated DCN services handled by the physical DC operator include:
 - Provisioning requests for low level DCN components like links, ports, FW rules, etc.
 - Monitoring requests for low level DCN stats like port level of flow level counters readings
 - Automated services like fencing off a specified part of the DC for the sake of maintenance or replacement. Such requests are higher level and will trigger a series of DCN operations like circuit configurations to migrate the existing workloads and data from the specified DC part, followed by circuits demolition and then by blocking off all the data connectivity of the fenced DC part leaving only the management port up, etc.
- **Virtual DC Operator** working on top of a rented virtual infrastructure; acts as a broker, managing virtual data centre infrastructures and providing them as a service for applications and service developers. As with DC operations, the Virtual DC operations include networking operations and will also have network administrators as part of the team. The difference from the DC Operator use cases is that virtualized infrastructure can be composed of ‘devices’ and ‘technologies’ different from those the underlying DCN is built with. Integrated DCN services offered by this type of actor may include:
 - Provisioning requests for virtualized DCN topology – switches, switch ports, links, etc.

Combining Optics and SDN In next Generation data centre Networks

- Provisioning requests for virtualized DCN services – connectivity, port-level of flow-level policies, FW rules, etc.
- Monitoring requests for the amount of physical resources consumed by the VDC infrastructure, e.g. for business controls.
- Monitoring requests for virtual DCN stats like port level of flow level counters readings
- Automated services like VDC replication over remote DC locations or policy based right-sizing of the VDC infrastructure to match the dynamically changing VDC load.
- Vertically integrated DC provider: the actor owns the physical infrastructure but also creates virtual DC Network slices to be provided as a service. Thus, the DC provider covers both physical and virtual joint IT and DCN infrastructure as a service. The SDN based control framework together with the orchestration layer permits the complete DC network management.
- End user: End users act as DC services consumer. Such end users may act differently according to the service model of their own business:
 - IaaS consumers demanding a whole DC infrastructure (processing, storage computing and networking resources) on top of which the consumer is able to deploy and run arbitrary software, including operating systems and applications. The consumer does not manage or control the underlying cloud infrastructure but has control over operating systems, storage and deployed applications.
 - PaaS consumers usually request a platform (Net and IT resources) on top of which they are able to deploy cloud infrastructure applications created using programming languages, libraries, services and tools supported by the provider. The consumer does not manage or control the underlying cloud infrastructure including network, servers, operating systems, nor storage, but has control over the deployed applications and possibly configuration settings of the application-hosting environment.
 - SaaS consumers. In this case, the consumers only demand the usage of providers' applications running on top of a cloud infrastructure and are able to commit limited user-specific application configuration settings. the low level networking details are totally supercilious as the application owner is just concerned with application components connectivity service and its properties being the network logic transparent for them.

7.2 Service model phases

7.2.1 Service request

The service consumer defines the requirements for the desired service instance and sends the request to a service provider. This phase ends with the establishment of a final agreement between service consumer and service provider. The process can be fully automated (e.g. through a request to a web portal) or may require human intervention (e.g. for the delivery of a customized solution). The figure below shows, as an example, the web page to order an Interoute VDC service, where the customer can choose from a range of pre-configured options and is guided through a simple configuration. For more complex deployments, the web page shows the service provider contact points.

Interoute Virtual Data Centre

Build Your Cloud On Top of Our Global Network

The Interoute Virtual Data Centre (VDC) has sites in London, Paris, Amsterdam, Madrid, Berlin, Geneva, Milan, Hong Kong and New York. The package you select below covers all these zones and you can select where you want to place your infrastructure when you deploy the VM.

Hypervisor: ESXi | Contract Duration: 12 months

	Utility	Small	Medium	Large
vCPU	Unlimited - €0.01600	12 - €0.01600	48 - €0.01520	192 - €0.01440
vRAM (GB) - ESXi	Unlimited - €0.02148	36 - €0.02148	144 - €0.02068	576 - €0.01988
vHardDrive (GB)	7680 - €0.00053	480 - €0.00053	1920 - €0.00050	7680 - €0.00048
Storage: Unprotected (GB)	From €0.000144	From €0.000144	From €0.000144	From €0.000144
Storage: Protected (GB)	From €0.000230	From €0.000230	From €0.000230	From €0.000230
Storage: Prot. Off Site (GB)	From €0.000345	From €0.000345	From €0.000345	From €0.000345

Pay as you go | €807.50 per month | €3325.00 per month | €11875.00 per month

Connect up your VDC

You can connect up your VDC zones using a **free MPLS VPN** now... or later if you would prefer. If you already have an MPLS VPN with Interoute, this will be added to your existing network by default. If you don't already have one, maybe you would like to connect your VDC network up to a corporate network? If so contact sales.support@interoute.com.

Zone	IP Address	Subnet Mask	Default Gateway
<input checked="" type="checkbox"/> Berlin	10.0.5.0	24	254
<input checked="" type="checkbox"/> Paris	10.0.6.0	24	254
<input checked="" type="checkbox"/> Milan	10.0.7.0	24	254
<input checked="" type="checkbox"/> Amsterdam	10.0.8.0	24	254
<input type="checkbox"/> Hong Kong		24	
<input type="checkbox"/> New York		24	
<input type="checkbox"/> Slough		24	
<input checked="" type="checkbox"/> London	10.0.12.0	24	254
<input checked="" type="checkbox"/> Geneva	10.0.13.0	24	254
<input checked="" type="checkbox"/> Madrid	10.0.14.0	24	254

Subnet Mask 255.255.255.0 | **First Available Address** 10.0.5.1
Network Address 10.0.5.0 | **Broadcast Address** 10.0.5.255

Figure 20 – Web pages to request and configure an Interoute VDC service

7.2.2 Service deployment

The cloud service specified in the previous phase is deployed by the service provider. This phase should be as much automated as possible.

A cloud service is delivered through two steps: a deployment phase, where the resources are allocated and instantiated and an operation phase, where the instantiated resources are configured and provisioned to the user. During the operation phase, the user has access to the service, which should be available according to the SLA defined at the service request phase.

7.2.3 Service Operation

7.2.3.1 Service Monitoring

The service provider continuously monitors the service to verify the compliance with the SLA. In some scenarios, per-service monitoring facilities should be provided to the service customer. Monitoring should have a limited impact on the running services.

7.2.3.2 Service re-planning and restoration

Service re-planning and restoration can be triggered to avoid SLA violations or to mitigate their impact, e.g. in case of service disruption. The datacentre operator may also use re-planning for maintenance or performance/usage optimization, but without disrupting the running services.

7.2.4 Service termination

The service is decommissioned and the resources are de-allocated, to become available for new services.

8 Summary

This deliverable provides a comprehensive description of COSIGN innovations and scope, by depicting the novel COSIGN layered architecture with the supported functionalities that address some of the future DCN requirements and challenges. Starting from a SoTA analysis in terms of DCN architectures and an extensive compilation of requirements, WP1 work team have defined identified the architecture building blocks, functionalities and interfaces. COSIGN vision is to move away from today's highly hierarchical, vendor specific, manually controlled, which offer performance and escalation limited DC solutions towards flat, scalable, automatic and optimized DC infrastructures of tomorrow [1].

In terms of data plane, the different scenarios described in 5.1 are defined based on their prospective horizon for deployment/implementation. They all include innovative concepts: The **short-term scenario** puts emphasis on flattening the network by scaling the number of high speed ports on a switch. The switch is still essentially an electronic switch but several major changes have been made to it on both HW and SW aspects. On the HW aspect the optical interconnects have been moved from the edge of the board where they are traditionally located to the perimeter of the switch ASIC. This leads to great savings in power consumption as well as cost. Power is saved by making signal repeaters and repeaters unnecessary as well as allowing to lower the signaling voltages (and hence power) of the high speed signals (between SERDES and optical module). Cost is saved by reducing the number of optical modules needed, removing the retimer ASICs and allowing the use of lower cost PCB technology since transmission lines (between ASIC and optical modules) are down to a few centimeters). On the SW aspect, the switches will run open flow which means they can be controlled using an SDN controller. This will lower the power consumption of the switching ASIC. With regards to the **mid-term scenario**, it includes all of the advantages of short-term scenario but offers to create an additional overlay network which can be configured on a longer time scale to answer needs of resource/bandwidth reallocation for specific and scheduled tasks in a dynamic manner. The technology for the overlay switches allows to scale the switch size to >500x500 ports which means that a single over-layer switch can service a large number of traditional TORs. Since the optical overlay switch is also SDN controlled, one can orchestrate the TORs and overlay switches together for specific use cases. Regarding the **long-term scenario "A"**, the optical overlay switch will be augmented by small scale high speed optical switches. In this way, additional speed and flexibility can be introduced into the overlay network. In this way one can use the optical overlay not only for scheduled large flow switching but also for packet transmission and TDM media access control. The fast switches can also be integrated close to the servers and support meshing of servers. In the **long-term scenario "B"**, we are abandoning some of the main constraints in conceptualizing the network, such as cost and complexity and try to envision the most flexible node architecture and network topology possible. The key advantages behind this architecture is that it supports both SDM, WDM & TDM all with maximum granularity. While the eventual network node is very complex and most likely very expensive in today's technology, the many advantages of this architecture are interesting and will be explored in part by building parts of such a node as well as in simulation.

Referring to the upper software layers of the COSIGN architecture, the SDN-based control layer enables the exploitation and integration of the innovative optical data plane in data centre environments. Control plane internal features are designed to maximize the utilization of the optical infrastructure while delivering connection services and virtual optical slices with high degrees of programmability, flexibility and dynamicity. The interfaces exposed at the north-bound are the key to achieve the full cooperation with between network control and cloud orchestration layer and enable joint decisions and operations over the whole set of DC resources. The orchestration layer proposes a unified framework for the joint management of network and IT resources.

Appendix: Complete list of COSIGN and Future DCN architectures requirements

BUSINESS REQUIREMENTS

R-BUS-01 Resource and Services provisioning

R-BUS-01 Description	Resource and Services provisioning Self-service on-demand and/or automated deployment and provisioning of customizable virtual infrastructures, integrating virtual appliances, storage and network elements. Customers must be able to specify a virtual infrastructure beyond the pure IaaS model, including virtual appliances like firewalls, IPSs, VPN services, load balancers, network monitoring and analysis services in the service request.
KPIs	<ul style="list-style-type: none"> • Service provisioning time • Virtual appliances that can be specified in the service request • Level of customization of the virtual infrastructure service
Impact	High. For DC operators, self-service provisioning and automation are fundamental to limit the manual management of the DC infrastructure and optimize the usage of the available resources. Moreover, customers are often interested in complex infrastructures offering integrated advanced services, but easy to manage and configure.
Novelty	Low for the self-service provisioning. Current virtual DC services allow the customer to specify the desired infrastructure and most of the procedures to setup VMs and simple network services are automated. However, more complex network configurations and the deployment or provisioning of additional virtual network appliances is not yet integrated and automated.
Functionalities	<ul style="list-style-type: none"> • Orchestration of service components in the IaaS area, combined with virtualized network functions. • Automated provisioning of cloud resources and multiple virtual network functions and applications.
Layer	SDN controller – D-CPI, south-bound plugins.
Related DP requirements	From the infrastructure perspective it means flexible reconfiguration capabilities that can be implemented at the controller layer or at the HW layer, or both. While defining the SDN framework (WP3) it will be needed to define which are the exact implications that this requirement exerts on the HW layer. In principle, this requirement has no direct HW implications.

R-BUS-02 Elasticity

R-BUS-02 Description	Elasticity Self-service on-demand and/or automated scale-up and scale-down elasticity features, enabled through open and programmable APIs.
KPIs	<ul style="list-style-type: none"> • Time required to detect a condition of service degradation or inefficient resource usage for automated scale-up and scale-down only); • Time required to upgrade or downgrade the virtual infrastructure and re-configure the running services, when needed; • Impact on the existing services; • Efficiency of scale-up and scale-down strategies in terms of resource utilization • Availability of real-time monitoring information through the APIs to determine the load and the performance of the service (for on-demand

	scale-up and scale-down)
Impact	High. Customers with service requests that are highly variable with the time period are interested in using infrastructures customized to their actual business needs, without paying fixed fees for an over-provisioned infrastructure. Moreover, some of them are interested in controlling and manipulating themselves the size and characteristics of the rented infrastructure, using their own algorithms and applications to define the best environments for their current service load. In this case, the system must provide interoperability with external applications through APIs that allow collecting monitoring information and dynamically regulating the dimension of the virtual infrastructure.
Novelty	Medium. Existing cloud platforms already implement elasticity mechanisms; however the programmability of these operations through open APIs is still limited.
Functionalities	<ul style="list-style-type: none"> • Monitoring and detection of performance degradation. • Dynamic modification of running virtual infrastructures possibly associated to re-optimization of resource placement. • Open APIs to get monitoring information (e.g. service performance or real-time availability of unused resource in the virtual infrastructure) and request infrastructure updates from external applications.
Layer	SDN controller – D-CPI, south-bound plugins.
Related DP requirements	From the infrastructure perspective it means flexible reconfiguration capabilities that can be implemented at the controller layer or at the HW layer, or both. While defining the SDN framework (WP3) it will be needed to define which are the exact implications that this requirement exerts on the HW layer. In principle, this requirement has no direct HW implications.

R-BUS-03 Monitoring Tools

R-BUS-03 Description	Monitoring tools Integration of configurable monitoring tools to allow DC operators to keep trace of resource usage and service performance.
KPIs	<ul style="list-style-type: none"> • Number, frequency and type of available monitoring measurements • Configurability of monitoring mechanisms • Time required to detect failures and discover their origin.
Impact	High. Monitoring is fundamental to evaluate the performance of the services, detect misbehaviors or failures, keep trace of the resource usage and verify the SLAs established with the customers (or federated partners if applicable).
Novelty	Low. Monitoring mechanisms are already integrated in most of the cloud platforms. However, there are still limitations in the integration of additional monitoring tools oriented to the customers.
Functionalities	<ul style="list-style-type: none"> • Monitoring mechanisms. • Integration of additional and customized monitoring tools, e.g. through automated deployment of dedicated virtual network applications.
Layer	SDN controller – D-CPI, south-bound plugins, HW layer resources.
Related DP requirements	From the infrastructure perspective this requirement entails the need to monitor physical resources information and forward towards the SDN controller layer to be consumed by Orchestration and management layer. More specifically, it must be specified the parameters which can be monitored at the physical layer and also the interface to forward them towards the upper layers.

R_BUS_04 Virtual infrastructure control APIs

R-BUS-04 Description	Virtual infrastructure control APIs Secure open and programmable APIs to enable advanced control of a running VDC service from customer's applications. An example of functions to be exposed by these APIs are monitoring, enforcement of automated elasticity rules or dynamic modification.
-----------------------------	--

KPIs	<ul style="list-style-type: none"> Number, type and configurability of the functions to manipulate the VDC service, as exposed through the open APIs
Impact	High. Customers obtain more control on their own VDC and are able to adopt their own proprietary applications. These applications need to be easily modified to make use of the open and programmable APIs, to fully customize the VDC behavior and characteristics.
Novelty	High. The programmability of the VDC can be extended with a richer set of functions and configuration options. The security of the APIs, with different levels of access, must be guaranteed.
Functionalities	<ul style="list-style-type: none"> Open APIs to allow external applications to programme the different components of a VDC instance.
Layer	SDN controller
Related DP requirements	From the infrastructure perspective it means flexible reconfiguration capabilities that can be implemented at the controller layer or at the HW layer, or both. While defining the SDN framework (WP3) it will be needed to define which are the exact implications that this requirement exerts on the HW layer. In principle, this requirement has no direct HW implications.

R_BUS_05 Accountability, billing and elastic SLAs management (UC1)

R-BUS-05 Description	<p>Accountability, billing and SLA management</p> <p>Monitoring and accounting mechanisms to support of multiple and flexible pricing models, including commit, pay-as-you-go or mixed models. Integrated mechanisms for end-to-end (network + cloud) SLA monitoring and verification.</p> <p>While building the DC network infrastructure for future DCs and providing new added value services, it is important to consider new more flexible and attractive accounting and billing mechanisms.</p> <p>Related to requirements (1 and 2), it would be interesting to enable the possibility of different types of users accessing to the service with different level of access on the infrastructure provided (premium, gold, silver, etc.) From a technical perspective, the solution could for instance provide with full network programmability and then hide or show depending on the user type.</p> <p>With regards the SLAs elasticity, it refers to Service Re-shaping (i.e. computing/storage capabilities) SLAs in an automated way. Two layers would be here implied: the virtual infrastructure layer while adding VMs and the physical layer while adding machines. The billing model that could be applied: "Pay as you go".</p>
KPIs	<ul style="list-style-type: none"> Supported accounting models Flexibility of SLA models for complex VDC services SLA verification Capability and time required to detect or predict SLA violations and time of reaction
Impact	High. The flexibility of the pricing model is key to attract and maintain different categories of customers, each of them with widely different requirements. Moreover, the VDC performance and the compliance of the service with the guarantees negotiated in the SLAs are fundamental to enable customers to move their service platforms on the VDC.
Novelty	High. Mechanisms for cloud SLA management need to be improved, especially in case of complex services with a variety of interacting components. They should integrate procedures to detect SLA failures in advance, to allow the system to properly react in time.
Functionalities	<ul style="list-style-type: none"> Integrated network and cloud service monitoring.

	<ul style="list-style-type: none"> • Integrated SLA validation for composed services. • Accounting mechanisms for commit, pay-as-you-go and mixed models.
Layer	Infrastructure level - Management layer. Infrastructure level - SDN Control plane layer.
Related DP requirements	From the infrastructure perspective it means flexible reconfiguration capabilities that can be implemented at the controller layer or at the HW layer, or both. While defining the SDN framework (WP3) it will be needed to define which are the exact implications that this requirement exerts on the HW layer. In principle, this requirement has no direct HW implications.

R_BUS_06 Privacy and security

R-BUS-06 Description	Privacy and security High-level of privacy and security, mechanisms for logical separation and high-availability.
KPIs	<ul style="list-style-type: none"> • Maximum number of coexistent and isolated VDC instances. • Percentage of availability of the service.
Impact	High. The privacy, isolation and high availability of the VDC service are a fundamental requirement for the acceptance of the service.
Novelty	Medium. Mechanisms for virtualization and logical separation of service instances are already available. Efficiency of scheduled backups and service restoration in case of failure can be improved.
Functionalities	<ul style="list-style-type: none"> • Logical separation of each customer's domain. At the network level examples of technologies to provide logical separation are VLAN tagging, MLPS encapsulation, BGP-based MPLS VPNs and Virtual Routing/Forwarding (VRF) tables. • Mechanisms to control service replication and fast restoration.
Layer	Management layer. SDN controller
Related DP requirements	From the infrastructure perspective it means flexible reconfiguration capabilities that can be implemented at the controller layer or at the HW layer, or both. While defining the SDN framework (WP3) it will be needed to define which are the exact implications that this requirement exerts on the HW layer. In principle, this requirement has no direct HW implications.

R_BUS_07 Virtual infrastructure administration and management interface

R-BUS-07 Description	Virtual infrastructure administration and management interface User-friendly interfaces for VDC administration and control with differentiated levels of (i) user authorization and (ii) resource configurability. The interface should support mechanisms for resource consumption monitoring, server administration and management of network and data physical location.
KPIs	<ul style="list-style-type: none"> • Functions and configuration details supported by the administration and management interface. • Ease of use of the administration and management interface. • Granularity and configurability of the access levels.
Impact	High. Customers need to have an easy, secure and complete access to the main administrative and management functions of their own VDC instance. Differentiated levels of authorization are required to avoid undesired and possibly disruptive configuration actions and to regulate the access to restricted and reserved information.
Novelty	Medium. Most of the cloud platform and VDC-like services offer a graphical user interface to enable the main management actions and visualize historical and real-time usage data.

Functionalities	<ul style="list-style-type: none"> Administration and management interface with authentication and policy-based authorization procedures.
Layer	Management layer. SDN controller
Related DP requirements	From the infrastructure perspective it means flexible reconfiguration capabilities that can be implemented at the controller layer or at the HW layer, or both. While defining the SDN framework (WP3) it will be needed to define which are the exact implications that this requirement exerts on the HW layer. In principle, this requirement has no direct HW implications.

R_BUS_08 RAS

R-BUS-08 Description	<p>RAS</p> <p>Service reliability and availability, combined with network resilience. Support of mechanisms for automated and fast disaster recovery, integrated with on-demand or scheduled backups and replications of data in local or remote DC sites.</p> <p>RAS is one of the acronyms expanded in the beginning of the document. Means “Reliability, Availability, Serviceability”. From the networking HW perspective means failure detection and reporting capabilities and enough redundancy to enable the software to overcome the failures.</p>
KPIs	<ul style="list-style-type: none"> Time required to detect a failure Time required to re-establish the failed service
Impact	High. Service reliability and availability are features that need to be guaranteed for VDC services. Customers should also be able to request customized strategies for backups, in terms of frequency, number of replications or data locations, with differentiated prices.
Novelty	Medium. Recovery mechanisms for network services are already available. However, the main novelty is in their integration with the overall service recovery and the quick reconfiguration of the network infrastructure to make use of the data replicated in other servers within the same data centre or in remote data centres. Moreover, integrated network configuration mechanisms should allow for an efficient utilization of the resources during scheduled backups, when huge amounts of data are transferred among servers or entire data centers in pre-planned time intervals.
Functionalities	<ul style="list-style-type: none"> Network or service failure detection Automated network service recovery Automated network reconfiguration in support of cloud service recovery, spanning across the local data centre or to external data centres, in case of remote data back-ups
Layer	Management layer. SDN controller
Related DP requirements	From the networking HW perspective means failure detection and reporting capabilities and enough redundancy to enable the software to overcome the failures.

R_BUS_09 Network Management Integration

R-BUS-09 Description	<p>Network Management Integration</p> <p>Integration between cloud and network, to allow a fast transfer of huge amounts of data within and among data centres, as well as to users distributed around the world. Global connectivity is out of the scope; also, it is not clear how this requirement relates to the integration between the network and the rest of the cloud. May be it is a result of co-editing and needs fixing. On the other hand, We need to cover the local provisioning for the external connectivity and this includes sending data outside the DC and receiving it from the outside, catering both for user requests and</p>
-----------------------------	--

	data transfers. On HW level this means we need to provision bandwidth for the sake of external connectivity.
KPIs	<ul style="list-style-type: none"> • Performance of network connectivity within a data centre and between different data centres during cloud management procedures (e.g. to transfer VMs or user contexts/data into different locations) • Performance of network connectivity when users access data on their own VDC from remote locations • Level of automation of network management within cloud infrastructure workflows
Impact	High. Users need to have a guaranteed and efficient access to their own data and services located or running on the VDC. On the other hand, management actions that involve transfer of large data need guarantees about the network performance. From a data centre operator perspective, the management of the network connectivity associated to these services should be fully integrated, to limit the manual intervention.
Novelty	Medium. Basic coordination of cloud and network services has been studied in previous projects. However COSIGN can analyze the adoption of SDN technologies in network management and a potential more advanced cooperation between cloud and network control, exploiting the network programmability offered by the SDN architectures.
Functionalities	<ul style="list-style-type: none"> • Orchestrated coordination of cloud and network services.
Layer	Management Layer, Orchestration. SDN controller
Related DP requirements	There is a need to cover the local provisioning for the external connectivity and this includes sending data outside the DC and receiving it from the outside, catering both for user requests and data transfers. On HW level this means we need to provision bandwidth for the sake of external connectivity.

SERVICE REQUIREMENTS

R-SERV-01: Seamless Network Resources Provisioning

R-SERV-01 Description	Seamless Network Resources Provisioning Network resources should be provisioned to applications flexibly and transparently; underlying IT infrastructure should be configured automatically, to achieve fast (minutes) application/service deployment. Configuration time is a very relevant requirement for the data plane. It is most likely that this process will be dominated by the SW and not the HW delays.
KPIs	<ul style="list-style-type: none"> • E2E connectivity service established within the DC. • E2E service matches expected SLAs.
Impact	High. A suitable resources provisioning mechanism is key to ensure a proper service performance. It is important to ensure that the resources provided match services SLAs during the service lifecycle.
Novelty	Low. Resources provisioning is a well-known requirement.
Functionalities	<ul style="list-style-type: none"> • HW resource controlled by SDN controller layer. • Resources' features and capabilities available to be consulted by the service and application layers.
Layer	Service Level SDN controller – CPI, north-bound plugins.
Related DP requirements	Not related HW requirements.

R-SERV-02: Advanced Network Services Provisioning

R-SERV-02 Description	<p>Advanced Network Services Provisioning The data centre should be able to provision advanced network services on demand, allowing dynamic provisioning and configuration, and including service chaining and orchestration for complex services. This requirement is mostly SW related and belongs to management layer. Some services can be implemented by specialized HW (like offload, acceleration, filtering). Building such HW is out of the scope of the project. Nevertheless, it is a requirement to be considered at the HW (independently of its feasibility to be implemented).</p>
KPIs	<ul style="list-style-type: none"> • E2E connectivity service established within the DC. • E2E service matches expected SLAs.
Impact	High. A suitable resources provisioning mechanism is key to ensure a proper service performance. It is important to ensure that the resources provided match services SLAs during the service lifecycle.
Novelty	High. Making available specific on-demand and configurable network services making the most of optical HW at DCs is definitely new. Leaning on the SDN control and the management layers, it would be possible to provide with new features to network services in DC.
Functionalities	<ul style="list-style-type: none"> • Configuration tools available at user level to handle the HW as it was of its ownership. • Mechanisms to map such advanced services to the application layer available.
Layer	Service Level Infrastructure layer – Management Infrastructure layer – SDN control framework Infrastructure layer –Physical HW.
Related DP requirements	Some services can be implemented by specialized HW (like offload, acceleration, filtering).

R-SERV-03: Service level monitoring

R-SERV-03 Description	<p>Service level monitoring In order to provide service layer monitoring, the monitoring mechanisms must be deployed at the physical infrastructure layer and forwarded to the upper service layer. The number of monitoring alarms forwarded to the service layer will be lower than the number of total alarms managed at the resource level and probably the alarms' information will be abstracted in the service layer. The data centre should facilitate application level monitoring required to decide whether service levels agreements are satisfied. There are also some requirements regarding the data collection in networking HW can be derived (through the controller APIs).</p>
KPIs	<ul style="list-style-type: none"> • Service performance real-time monitoring. • Service level matches expected SLAs.
Impact	High. Service monitoring is key to show service performance and enable service reconfiguration in case service degradation, for instance.
Novelty	Low.
Functionalities	<ul style="list-style-type: none"> • Service monitoring tools enabled, consuming network monitored parameters.
Layer	Service Level Infrastructure Level - HW Layer Infrastructure Level - SDN controller Layer. CP Northbound and southbound interfaces. Infrastructure Level - Management and Orchestration Layer

Related DP requirements	Pure physical data monitoring, compilation and forwarding of networking HW.
--------------------------------	---

R-SERV-04: Adapting to application/service dynamicity

R-SERV-04 Description	Adapting to application/service dynamicity Resources allocated for a service or an application should be dynamically re-provisioned according to the changes in demand and/or in requirements of the application/service.
KPIs	<ul style="list-style-type: none"> • Service reconfiguration as a consequence of modifying allocated resources.
Impact	Medium. Automation of resources reallocation is highly desirable. Nevertheless manual mechanisms are already available, so that this feature would add value to the service, but is not a fundamental one.
Novelty	High. Automated re-provisioning systems are not typical of operation environments. NOCs still feel reluctant to lose control over specific network provision mechanisms and due to the fact that the number of re-provisioning events is low, they prefer to keep it in a manual way.
Functionalities	<ul style="list-style-type: none"> • Service auto-reconfiguration and re-provisioning tool available. • Include resources re-provision mechanisms as part of the monitoring tool.
Layer	Service Level Infrastructure layer – Management Control Plane Layer and Southbound CPI. HW Layer.
Related DP requirements	The ultimate consequence of enabling re-provisioning mechanisms at the service layer, would consist on the effective re-provisioning at the HW layer. Therefore the same CPIs that handle HW layer resources should be enabled for dynamical reconfiguration.

R-SERV-05: QoS provisioning

R-SERV-05 Description	QoS provisioning The data centre should provide mechanisms to satisfy application's QoS requirements (e.g., BW, delay, and resiliency) and policies set to ensure the agreed service level. Again, the global SLAs must be translated into network QoS by the SW layers.
KPIs	<ul style="list-style-type: none"> • Service performance matching SLAs. • Real-time Service monitoring. • Measurement of proper service metrics.
Impact	High. Service SLAs are key in terms of service provisioning. Therefore it is important to keep service QoS above the minimum acceptable thresholds.
Novelty	Low. QoS provisioning is a well-known addressed topic.
Functionalities	<ul style="list-style-type: none"> • Enable a monitoring tool that maps service metrics into levels of performance.
Layer	Service Level Infrastructure layer – Management Infrastructure layer – SDN control plane framework
Related DP requirements	Not direct related HW requirements.

R-SERV-06: Real Time Control

R-SERV-06 Description	Real Time Control Control of network resources should allow real time detection and reaction to changes in the state of the infrastructure resources to cope with performance
------------------------------	---

	constraints. This will help reducing the impact of failures and unexpected behaviors. HW in the data plane should report faults to higher level– timely failure detection and reliable failure reporting.
KPIs	<ul style="list-style-type: none"> • Fault reporting. • Fast service performance recovery.
Impact	High. Real time fault detection is fundamental to detect network service degradation.
Novelty	Medium.
Functionalities	<ul style="list-style-type: none"> • Linked to (or even embedded in) the monitoring tool, it could be included a mechanism to automatically react on real-time whenever changes are required.
Layer	Service Level Infrastructure layer – SDN control plane framework Infrastructure layer – HW resources
Related DP requirements	HW in the data plane should report faults to higher level– timely failure detection and reliable failure reporting. Additionally, decisions taken on the SDN control plane should take an effect at the HW layer to react upon service degradation.

R-SERV-07: Big data support

R-SERV-07 Description	Big data support Applications making use of big data should be supported by future data centres, having an impact on capacity, latency, access, security, cost and flexibility and requiring Big data analytics. This requirement has no direct HW implications above the already defined ability to provide flexible dynamic bandwidth.
KPIs	<ul style="list-style-type: none"> • Proper flow rates while migrating large amount of Data. • Network energy consumption reduction while moving Data.
Impact	High. When it comes to Big Data, network infrastructure is in fact one of the top priorities. No matter how you define Big Data, it's all about large volumes of data that need to move around a network. Bandwidth, latency, and the importance of network infrastructure are key relevant to Big Data initiatives.
Novelty	High. Big Data is a relative new concept and the movement of large volumes of data within and across DCs is becoming more important.
Functionalities	<ul style="list-style-type: none"> • Relevant metrics for Big Data support monitoring. • Energy efficiency mechanisms: Moving data is bad for data. It really cost a lot of money in terms of energy.
Layer	Service Level Infrastructure layer – SDN control plane framework Infrastructure layer -- Management
Related DP requirements	Not related HW requirements, others than providing monitoring data to the upper layers.

R-SERV-08: Secure data management

R-SERV-08 Description	Secure data management Insurance of the end-to-end, secure use of data within applications as well as secured access to remote data sources.
KPIs	<ul style="list-style-type: none"> • DC security checklist applied, ranging from room security access to brute force and sneak attacks. • Preventive controls • Detective controls • Corrective controls.
Impact	Very High. Service security in DCs (at any level, not only at service level) is fundamental for Cloud related business. As simple, as if services are not secure, the client will move to the competence.
Novelty	Low.

Functionalities	<ul style="list-style-type: none"> • Security NFVs complementary to current HW security. • Data and service isolation mechanisms. • Authorization, authentication and availability mechanisms to ensure secure data management.
Layer	Service Level Infrastructure layer – Management Infrastructure layer – SDN controller.
Related DP requirements	Typical HW later security requirements which may impact to the service layer.

R-SERV-9: Security management

R-SERV-9 Description	Security management Provide a way of managing security mechanisms for a coordinated physical, network, data and user security for different stakeholders (user, service provider, cloud provider).
KPIs	<ul style="list-style-type: none"> • DC security checklist applied, ranging from room security access to brute force and sneak attacks. • Preventive controls • Detective controls • Corrective controls.
Impact	Very High. Service security in DCs (at any level, not only at service level) is fundamental for Cloud related business. As simple, as if services are not secure, the client will move to the competence.
Novelty	Low.
Functionalities	<ul style="list-style-type: none"> • Security NFVs complementary to current HW security. • Data and service isolation mechanisms. • Authorization, authentication and availability mechanisms to ensure secure data management.
Layer	Service Level Infrastructure layer – Management Infrastructure layer – SDN controller.
Related DP requirements	Typical HW later security requirements which may impact to the service layer.

R-SERV-10: Self-service management interfaces

R-SERV-10 Description	Self-service management interfaces Several interfaces are required for the management of the services and applications deployed on the data centre. The interfaces should allow the configuration of self-service policies, notifications, information retrieval and monitoring and the configuration of the elements of the service, independently of other services running in the system.
KPIs	<ul style="list-style-type: none"> • Full orchestrated services management based on previous described tools and functionalities. • Automation of management procedures.
Impact	Medium.
Novelty	High. Management operational tasks are commonly controlled by NOCs and processes automation and features are not so common.
Functionalities	<ul style="list-style-type: none"> • Self-service configuration Interfaces
Layer	Infrastructure level - Management layer and interfaces.

Related DP requirements	Not related HW requirements.
--------------------------------	------------------------------

R-SERV-11: Multi-tenant isolation

R-SERV-11 Description	Multi-tenant Isolation Each application or service deployed in the cloud should be sufficiently isolated from the rest of the workloads, in terms of data isolation, management isolation, and performance isolation. DC networks isolation techniques strongly rely on virtualization mechanisms and abstraction tools.
KPIs	<ul style="list-style-type: none"> Implementation of per-tenant service isolation mechanisms.
Impact	High. Service isolation is important to ensure service integrity and make clients trust on the provided service security.
Novelty	Medium. Service isolation is not a new topic; Nevertheless the large variety of isolation technologies based on virtualization which are arising are quite novel and add value to service isolation at different architectural layers.
Functionalities	<ul style="list-style-type: none"> Implement partitioning techniques at different levels: <ul style="list-style-type: none"> NIC L2 (VLAN) Le Network using L3 (VXLAN, GRE) L3 Network using L3 (MPLS, GRE, IPSec) Etc.
Layer	Service Level Infrastructure level - HW layer Infrastructure level - Control layer
Related DP requirements	Multi-tenant isolation can be done at different layers. Performing such mechanisms at physical layers is a possibility.

R-SERV-12: Service Traffic Profile (From UC2)

R-SERV-12 Description	Service Traffic Profile Each service or application to be deployed in the Data Centre should provide information about its expected traffic profile and connection requirements, so that the DC network can be configured to offer the required connectivity at service runtime. More specifically, traffic profile information and requirements may include the following parameters: max packet loss, minimum guaranteed bandwidth, peak rate, jitter and latency, type of connectivity (point-to-multi-point, point-to-point, asymmetric/symmetric connectivity), recovery strategies, redundancy. Since VMs may be instantiated on the same DC or distributed among different DCs, the service traffic profile may impact in the intra-DC connectivity or also the inter-DC connectivity.
KPIs	<ul style="list-style-type: none"> Type of traffic profile parameters supported in the service description
Impact	Medium. Traffic profile metrics must be included in the service description, handled at the orchestrator level and mapped into specific parameters in the requests towards the SDN controller for network configuration. At the control level, this requirement is related to R-CP-02, with high impact on CP components (A-CPI and internal mechanisms for customized network provisioning).
Novelty	Medium. Current architectures offers pre-defined cloud service templates with the possibility to specify a limited number of network-related parameters.
Functionalities	<ul style="list-style-type: none"> Service specification and modeling Service orchestration with coordinated network configuration.
Layer	Service layer
Related DP requirements	Not direct related HW requirements.

requirements	
---------------------	--

R-SERV-13: Generalized information model (From UC2)

R-SERV-13 Description	Generalized information model The specification of cloud applications and services should be based on a generalized information model, able to describe a wide variety of applications in a powerful, but user-friendly and abstracted manner, completely technology-independent. The information model must be able to support complex topologies and interactions between the logical entities composing the service. Moreover, it should support the description of the traffic profiles specified in R-SERV-13.
KPIs	<ul style="list-style-type: none"> • Level of service abstraction enabled by the information model. • Complexity of the scenarios that can be specified through the information model.
Impact	Medium. Some existing languages for cloud service specification and abstract modeling already exist. They may be properly extended to include the additional characteristics and metrics of novel application environments.
Novelty	Medium. Generalized information models for cloud service specification is already widely used. However, the main innovation is in the flexibility of the model so that it can be adapted to describe a wide variety of application environments, with different levels of complexity, abstraction and details about traffic profiles and network topology.
Functionalities	<ul style="list-style-type: none"> • Service specification and modeling
Layer	Service layer
Related DP requirements	Not direct related HW requirements.

R-SERV-14: Service connectivity disjunction (From UC2)

R-SERV-14 Description	Service connectivity disjunction It would be nice to be able to specify two fully disjointed connection in order to guarantee redundancy. This requirement at the service level may impact also the infrastructure layer. It was discussed about the convenience of this requirement due to the implications it imposes at the infrastructure layer. This is a “nice to have in the future” requirement that probably we won’t be able to incorporate in the implementation stage.
KPIs	<ul style="list-style-type: none"> • Service redundancy based on disjointed network connectivity.
Impact	High. On one hand, this constitutes a nice way to guaranty service redundancy. In the other hand, the costs derived for maintaining such redundancy with regards the HW layer, makes difficult to justify this requirement.
Novelty	Low. Redundant connections are well-known protection mechanisms. Nowadays, restoring mechanisms seem to be more effective and reasonable.
Functionalities	<ul style="list-style-type: none"> • N/A
Layer	Service Level Infrastructure level – HW layer.
Related DP requirements	Redundant connections at physical layer.

R-SERV-15: VDC optical BW control (or control of physical network aspects of the IaaS service provided) (From UC1)

R-SERV-15 Description	VDC optical BW control (or control of physical network aspects of the IaaS service provided) VDC operator should be able to control the optical BW (e.g. enable access to the optical wavelength or slot). In current VDC architectures, VIOs (Virtual
------------------------------	--

	Infrastructure Operators) are able to provide with the virtual connection and that's it. One step beyond is also to enable them with access to the BW of the connections they are providing so that VIOs are also enable to sell Capacity. VIO is the acronym for Virtual Infrastructure Operator.
KPIs	<ul style="list-style-type: none"> • A VIO has full control on the connectivity service. • VIO monitors, controls and sells the BW of the network connectivity service.
Impact	High: Ability for VIOs to sell capacity on-demand and modify the features of the connections they are provisioning. Most probably this cannot be done today, but it would entail better control on specific resources from the upper layers' perspective.
Novelty	High. Enable to VIOs with the opportunity to fine tune specific physical layer parameters, is not currently an available feature.
Functionalities	<ul style="list-style-type: none"> • Cross layer mechanism to enable this feature. This may involve the HW, control and management layers.
Layer	Service Level Infrastructure level – HW layer Infrastructure level – Control layer Infrastructure level – Management layer
Related DP requirements	Enable with the a functionality at the service level that enables VIOs to own specific rights to control and tune certain optical features of the connections they are providing. "Same level of control as if you were working on the physical devices". From WP2 it would be expected to know which are the features at the infrastructure layer that can be exposed to the upper layers, and which ones would be interesting to have and which ones should the control not be delegated under any circumstance to avoid problems.

R-SERV-16: Service Calibration (From UC1)

R-SERV-16 Description	Service Calibration This requirement may enable users to own the resources that he EXACTLY wants to. This is especially interesting from the application layer perspective.
KPIs	<ul style="list-style-type: none"> • DC End-user is capable to control the physical HW provided by the DC network infrastructure provider.
Impact	High. Enabling to end users with the control of a network HW equipment which is shared with other end users is a huge challenge, but a desirable long-term feature
Novelty	High. To the best of our knowledge, multi-tenancy mechanisms do not yet enable such feature.
Functionalities	<ul style="list-style-type: none"> • Application layer interface to enable DC tenants to control physical HW network resources.
Layer	Service Level Infrastructure level – HW layer Infrastructure level – Control layer Infrastructure level – Management layer
Related DP requirements	At HW layer, there should be exposed the interfaces that enable to control the physical resource to the upper (in this case application) layers. Besides, this should be combined with all the virtualization and abstraction mechanisms that enable current multi-tenancy and isolation features.

R-SERV-17: Intelligent/selective physical failure awareness (From UC1)

R-SERV-17 Description	Intelligent/selective physical failure awareness Depending of the gravity and seriousness of the failures that may take place at the physical layer, this should be hidden or noticed to the IaaS service consumer. Two main service behaviors: <ul style="list-style-type: none"> • The physical failure does not impact users' SLAs →The user must not be aware of the failure. • The physical failure impacts users' virtual infrastructure or the system cannot immediately recover → It must be noticed.
------------------------------	---

KPIs	<ul style="list-style-type: none"> Forwarding of physical layer alarms/notifications towards the service/user layer.
Impact	Medium: It is an added value feature that adds value to VIOs (Virtual Infrastructure Operators) to manage and control the services performance.
Novelty	High: To the Best of this consortium knowledge, this feature is not enabled for VIOs while providing services. VIO is the acronym for Virtual Infrastructure Operator.
Functionalities	<ul style="list-style-type: none"> Service functionality filtering failure awareness to service consumer according to specific metrics which measure the seriousness of the failure. Integration with monitoring tools.
Layer	Service Level Infrastructure level – HW layer Infrastructure level – Control layer Infrastructure level – Management layer
Related DP requirements	HW monitoring information must be available to be forwarded to the upper service layer.

R-SERV-18: equipment inventory services tool (From UC3)

R-SERV-18 Description	equipment inventory services tool It would be desirable to enable to service consumers with a catalog of the whole suite of DC network services enabled, the list of options which each service includes and their functionalities. Service customer is this way aware of the whole network connectivity services that are possible to be managed in the DC which is making use of.
KPIs	<ul style="list-style-type: none"> Service catalogue available for service consumer.
Impact	High. This is a nice feature to have from the “usability” perspective. It adds value to the overall service at the time it enables to service consumers with additional information on DC network services.
Novelty	Medium. Usually service catalogues only provide a high level overview on the available services, without getting into too much detail. While providing to a deeper control and management
Functionalities	<ul style="list-style-type: none"> Service catalogue visible at application layer
Layer	Infrastructure level requirement – Management layer
Related DP requirements	Not related HW requirements.

INFRASTRUCTURE LEVEL REQUIREMENTS
MANAGEMENT & ORCHESTRATION LAYER
REQUIREMENTS

R-MGMT-01: Element Management

R-MGMT-01 Description	Element Management Management and inventory of network equipment, equipment management, maintenance, administration, configuration, and performance monitoring. This means that all the devices must be able to lend themselves to this type of management – to have management interface, to be able to report its features, negotiate its settings, etc, through some of the standard or extended protocols).
------------------------------	--

KPIs	<ul style="list-style-type: none"> • Ask for the topology • Ask for routers appliances • Ask for routing algorithms (the consumer would be the customer consuming the VI (Virtual Infrastructure) operated by the VIO(Virtual Infrastructure Operator)). • Request for resources at specific locations: This requirement comes from the application layer. A certain application provider needs 5 co-allocated and 5 de-allocated machines to ensure the proper behavior of the application. • VLAN control and map visualization.
Impact	High. This feature enables a more intuitive management of the elements/resources of the service.
Novelty	Medium. There are already some Cloud and Network management tools which include monitoring and infrastructure visualization tools based on system queries.
Functionalities	<ul style="list-style-type: none"> • It should be enabled a visualization functionality (GUI/CLI, etc) to the service consumer, to access this information.
Layer	Infrastructure level – Management layer Infrastructure level – Control layer Infrastructure level – HW layer
Related DP requirements	HW resources must be able to lend themselves to this type of management – to have management interface, to be able to report its features, negotiate its settings, etc, through some of the standard or extended protocols).

R-MGMT-02: Operator Network Management mechanisms

R-MGMT-02 Description	Operator Network Management mechanisms Operator-scoped mechanisms for provisioning, monitoring, and control of network paths and circuits. Network paths must enable setting, monitoring, and enforcing the QoS and QoE attributes, like bandwidth, latency, amount of redundant paths between the source and the destination, etc.
KPIs	<ul style="list-style-type: none"> • Network admin is able to request for DCN resources provisioning. • Network admin is able to operate (monitor, modify) the characteristics of an already existing provisioning service. • Network admin is able to finish a provisioned service.
Impact	High. The full control of DC networking resources is a MUST HAVE feature, very much appreciate to fully operate the DCN infrastructure.
Novelty	Medium. Despite network resources management and operation are not novel requirements, in DCN environments it is not so common network administrators experiencing the full management of the network resources while provisioning services.
Functionalities	<ul style="list-style-type: none"> • Network topology tool • Network services provisioning interface.
Layer	Infrastructure level – Management layer
Related DP requirements	Not related HW requirements.

R-MGMT-03: Self-Service multi-tenancy

R-MGMT-03 Description	Self-Service multi-tenancy Each tenant of the DC must be enabled to self-manage the networking on behalf of
------------------------------	---

	its workload, in a way totally independent of the physical network infrastructure management and of the management of the other tenants' networks. On the other hand, simple and expectable out-of-the-box experience should be provided for tenants unwilling or unable to take care of their own networking administration. This is high level requirement, with no direct link to HW.
KPIs	<ul style="list-style-type: none"> • Several network slices provisioned to different tenants and managed without colliding. • The tenant fully manages the requested DCN slice by means of a GUI.
Impact	High. Added value in the service provided to DCN tenants. An additional management functionality that could be provided as a service.
Novelty	High. Slicing of virtual network mechanisms and the possibility to offer the management of such slices to the tenants constitutes a novel requirement. In practice, it's not foreseen to be incorporated in the short-term, since DCN network admins would not be very keen on this to happen.
Functionalities	<ul style="list-style-type: none"> • DCN slicing mechanisms • Network management as service (in order to delegate network slices management to tenants)
Layer	Infrastructure level – Management layer Infrastructure level – Control layer
Related DP requirements	This is high level requirement, with no direct link to HW.

R-MGMT-04: Automatic resources discovery

R-MGMT-04 Description	Automatic resources discovery
KPIs	<ul style="list-style-type: none"> • Network topology is automatically updated when a new network resource is configured in the DCN. • IT facilities are updated when a new storage or computation facility is enabled in the DC.
Impact	Medium. The automation of this type of processes are nice to have features, but the frequency with which
Novelty	Low. This is an already well known requirement.
Functionalities	<ul style="list-style-type: none"> • Topology manager • Topology inventory
Layer	Infrastructure level – Management layer Infrastructure level – Control layer Infrastructure level – HW layer
Related DP requirements	This is high level requirement. Nevertheless, the new physical resource deployed in the DCN environment requires to enable some mechanisms (beacons, broadcast, hello messages) to make the upper layers aware of their presence. Thus, it has an impact on the HW layer.

CONTROL PLANE LAYER REQUIREMENTS

R-CP-01 Automated provisioning of intra-DC connectivity

R-CP-01	Automated provisioning of intra-DC connectivity The COSIGN CP must provide mechanisms for an automated DCN configuration to
----------------	---

Description	establish and destroy intra-DC connectivity services on-demand (triggered by external requests) or in support of internal procedures (e.g. re-optimization of DCN resource allocation, connectivity restoration, etc.).
KPIs	<ul style="list-style-type: none"> • Connection setup time. • Connection tear-down time.
Impact	Medium. The granularity of connection provisioning must be handled considering the technologies available at the data plane.
Novelty	Medium. The novelty relies in the SDN approach applied to the DCN, where the provisioning of the DCN resources is controlled through the SDN controller(s) and in the automation of the provisioning.
Functionalities	<ul style="list-style-type: none"> • Connection provisioning service.
Layer	SDN controller – network application and A-CPI.
Related DP requirements	Mainly a control plane requirement. At the data plane level, R-DP-01 to R-DP-03 are enablers for this requirement.

R-CP-02 Support for customizable network services

R-CP-02 Description	Support for customizable network services The COSIGN CP must provide mechanisms to provide intra-DC connectivity services compliant with a variety of user-level constraints, including QoS parameters (e.g. bandwidth), timing constraints, service resilience guarantees.
KPIs	<ul style="list-style-type: none"> • Supported service constraints.
Impact	High. Requires a service interface at the A-CPI powerful enough to specify the desired constraints and control plane mechanisms to support them at the provisioning level (e.g. mechanisms for QoS configuration, network service scheduling, recovery, etc.).
Novelty	Medium. Current architectures are able to provide pre-defined and basic network services.
Functionalities	Connection provisioning service; <ul style="list-style-type: none"> • Additional services as required by the specific constraints (scheduling, recovery, etc.); • Correlated services like extended inventory services or computation algorithms dedicated to QoS-enabled connections, able to operated on scheduled resources or to compute disjoint routes, etc.
Layer	SDN controller – mainly network applications and A-CPI, but also core services.
Related DP requirements	Mainly a control plane requirement. At the data plane level, R-DP-01 to R-DP-03 are enablers for this requirement.

R-CP-03 Dynamic Support for multiple automated connectivity paradigms

R-CP-03 Description	Dynamic Support for multiple automated connectivity paradigms In order to support a variety of virtual infrastructure topologies, the COSIGN CP must provide mechanisms to establish point-to-point, point-to-multipoint or anycast connectivity, in unidirectional or bi-directional, symmetric or asymmetric mode.
KPIs	<ul style="list-style-type: none"> • Connection setup time for P2P, P2MP and anycast connections • Efficiency of network resource utilization
Impact	Medium. Requires a service interface at the A-CPI able to specify multiple connectivity models and control plane mechanisms to support them at the provisioning level.

Novelty	High. Current architectures are able to provide pre-defined and basic network services.
Functionalities	Connection provisioning service + correlated services (computation algorithms for P2MP or anycast services).
Layer	SDN controller – network applications and A-CPI
Related DP requirements	The control of the P2P, P2MP and anycast connectivity is beyond the scope of the data plane. However, the efficiency of the resource allocation may require suitable architectures of the network topology.

R-CP-04 Multi-layer operation of COSIGN data plane optical technologies

R-CP-04 Description	<p>Multi-layer operation of COSIGN data plane optical technologies</p> <p>The COSIGN CP must be able to efficiently operate the heterogeneous optical technologies adopted at the COSIGN DCN data plane. This means it must be able to handle their different constraints (even through resource virtualization), as well as the matching among the resource granularities offered for each specific technology.</p> <p>Multi-layer mechanisms must be adopted to coordinate the cross-technology resource allocation and maximize the efficiency for the whole DCN utilization, still in compliance with the requirements of the running services. Where possible, the usage of open, standard protocols for the interaction with the underlying physical technologies should be preferred, adopting dedicated extensions where required.</p>
KPIs	<ul style="list-style-type: none"> • Granularity and dynamicity of end-to-end connectivity services. • Efficiency of resource allocation in multi-layer environments (e.g. through the sharing of a connection established at a server-layer among multiple connections at a client-layer with higher granularity).
Impact	Medium. Requires additional internal functionalities within the SDN controller in order to manage the provisioning and re-adaptation of the multi-layer connectivity. At the interface level, it requires the common extensions to manage optical resources at the D-CPI.
Novelty	High. Current architectures usually provide static network services, without exploiting the multi-layer capabilities of the transport technologies.
Functionalities	Optical resource virtualization + multi-layer connection service provisioning + dynamic re-allocation of the resources providing the connectivity at the server-layer.
Layer	<p>SDN controller – D-CPI, south-bound plugins and core services (for resource abstraction).</p> <p>SDN controller – resource virtualization service.</p> <p>SDN controller – network application for multi-layer service provisioning and dynamic re-allocation.</p> <p>Agents to interact with the optical devices.</p>
Related DP requirements	Multiple optical technologies with different granularities needs to be available at the data plane (link to R-DP-01 and R-DP-03 requirement).

R-CP-05 DCN Resource usage optimization

R-CP-05 Description	<p>DCN resource usage optimization</p> <p>The COSIGN CP must provide mechanisms to provide intra-DC connectivity services compliant with a variety of operator-level constraints, including load-balancing strategies, energy efficiency, paths with minimum cost, etc.</p>
KPIs	<ul style="list-style-type: none"> • Number of supported objective functions for resource optimization. • Time required by the computation algorithms to select the most efficient set of resources with the given constraints.

Impact	Medium. It requires the implementation of suitable optimization algorithms within the SDN controller. The parameters to be used as input for these algorithms needs to be notified at the D-CPI level when related to the transport technologies (e.g. power consumption parameters) or configured through management interfaces when related to operator policies (e.g. “cost” of a link between two network nodes).
Novelty	High. The optimization of the resource usage allows the operator to increase the overall utilization of its Data Centre (e.g. to accommodate more services or users) while reducing the operating costs.
Functionalities	Computation algorithms and policy management within the SDN controller.
Layer	SDN controller – network application for resource selection. SDN controller – network application for policy management. SDN controller – A-CPI (for policy configuration). SDN controller – D-CPI (support of resource parameters to be used as input for resource selection algorithms).
Related DP requirements	The CP algorithms may need to operate on parameters that must be made available from the hardware (e.g. energy consumption parameters).

R-CP-06 DCN Elastic intra-DC connectivity

R-CP-06 Description	Elastic intra-DC connectivity The COSIGN CP must be able to dynamically scale-up and scale-down the capacity of the established connections, in support of the elastic features of the cloud services. The decisions about connectivity upgrade/downgrade may be taken internally at the CP layer or coordinated by upper-layer entities (e.g. at the orchestration level), but always in compliance with the established SLAs.
KPIs	<ul style="list-style-type: none"> • Time required to modify an existing connection. • Time required to detect an inefficient condition in the resource allocation for a given service (at the CP layer) and initiate a modification procedure.
Impact	Medium. It requires the support of modification requests at the A-CPI level and internal function within the SDN controller to support the modification of existing connections.
Novelty	High. This feature allows to apply the same elasticity concepts commonly used for the IT resources in a cloud environments to the network domain, with great benefits in terms of service dynamicity and automatic adaptation to the user requirements.
Functionalities	Modification of connection services on-demand or based on internal triggers.
Layer	SDN controller – A-CPI and network applications.
Related DP requirements	These are mainly CP requirements, but it is associated to the dynamic reconfiguration capabilities of the data-plane (see R-DP-03).

R-CP-07 Network monitoring

R-CP-07 Description	Network monitoring The COSIGN CP must be able to provide monitoring functionalities for network resource usage, network service performance and faults detections.
KPIs	<ul style="list-style-type: none"> • Time required to detect failures. • Statistics on the DCN resources usage and performance.
Impact	Medium. It requires the support of monitoring information at the D-CPI level. It requires the support of monitoring information at the management interface level.
Novelty	Medium. This feature allows to promptly react to any failure that could happen in the DCN as well as it allows to apply policies (e.g. load balancing) to better adapt to

	the user requirements while maximizing the utilization of the network resources. The main novelty relies on the usage of the SDN approach.
Functionalities	Monitoring services and statistics on the DCN resources usage.
Layer	SDN controller – D-CPI, Management
Related DP requirements	It is associated to the dynamic reconfiguration capabilities of the data-plane (see R-DP-03), for recovery purposes in this case.

R-CP-08 Programmable APIs

R-CP-08 Description	Programmable APIs The main configuration options and functions (e.g. service provisioning and tear-down, modification, queries for monitoring data) offered by the COSIGN CP must be exported through programmable APIs (e.g. based on the REST paradigms), with different levels of capabilities depending on authorization profiles. These APIs should allow exposing some (limited) functionalities directly to the users and enable an easy integration with the overall DC control and management platform.
KPIs	Set of configuration options and functions exported supported by the programmable APIs.
Impact	High. It requires the support of programmable APIs to enable users to perform provisioning and modification actions. It requires the support of the requests triggered by the users at the A-CPI level
Novelty	High. Current architectures do not allow to export network statistics and information to users.
Functionalities	Exposition of DCN performance to end users.
Layer	SDN controller – A-CPI and network applications.
Related DP requirements	This is mainly a CP requirement. No HW implications.

R-CP-09 Support of network service monitoring and accounting

R-CP-09 Description	Support of network service monitoring and accounting The COSIGN CP must produce and expose through a suitable management interface a set of monitoring information about DCN resource usage and allocation, as required to support cloud service accounting for various pricing models (e.g. pay-as-you-go or commit model).
KPIs	Co-existence of network services with different pricing models
Impact	Medium. It requires the support of management interfaces between SDN controller and OSS to gather DCN resources and allocation and usage statistics.
Novelty	Medium. This feature allows to gather information about the network usage to support the various pricing models.
Functionalities	Information about the usage and performance of DCN resources
Layer	Management functions (OSS) - SDN controller – D-CPI
Related DP requirements	This is mainly a CP and management layer requirement.

R-CP-10 Support of scheduled network connectivity

R-CP-10 Description	Support of scheduled network connectivity The COSIGN CP should be able to support scheduled or periodical connectivity services, between intra-DC resources or in support of connectivity among resources located in different DCs. Suitable synchronization procedures, in cooperation with upper layer entities (e.g. at the orchestration level), must be provided to coordinate the enforcement of the overall scheduled actions across the different DC resources. However, in-advance resource reservations at the network level (i.e. without actual configuration) should be planned and automatically updated to guarantee resource availability and optimize the global DCN utilization among the shared physical resources.
KPIs	Time required to automatically provide scheduled connectivity services.
Impact	High. It requires the support of automated configuration of the DCN resources for the scheduled events requiring scheduled connectivity services. It requires the support of cooperation through the A-CPI interface between the SDN controller and the orchestration level.
Novelty	High. This feature allows to achieve a global optimization of the shared DCN resources to provide both scheduled and on-demand connectivity services.
Functionalities	Automated scheduled connection services.
Layer	SDN controller – A-CPI and orchestration level.
Related DP requirements	This is mainly a CP requirement. No HW implications

R-CP-11 Network service resilience

R-CP-11 Description	Network service resilience The COSIGN CP must be able to detect network service failures and, where possible, react in an automated manner through fast connection recovery procedures. Depending on the established SLAs and the original service requests, protection or restoration mechanisms can be applied. When network service restoration procedures are not applicable, asynchronous failure alerts must be produced and notified to the upper layer (e.g. to the orchestration level) to enable recovery escalation strategies. Simple restoration mechanisms can probably be implemented directly in the physical HW (or close to it). Restoration based on SLA is beyond the scope of data plane alone.
KPIs	<ul style="list-style-type: none"> • Time to automatically recover from a failure is support of the established SLA and original service characteristics. • Time to detect and notify to the orchestration level the failure occurrence.
Impact	Medium. It requires the support of (fast) recovery actions at both the A-CPI and D-CPI level.
Novelty	Medium. The novelty relies on the usage of the SDN approach and the overall orchestration of the DCN resources.
Functionalities	Detection and notification through the D-CPI and A-CPI of failure occurrence.
Layer	D-CPI - SDN controller – A-CPI and network applications.
Related DP requirements	This is mainly a CP requirement, but it is associated to the dynamic reconfiguration capabilities of the data-plane according to the defined recovery strategy (see R-DP-03).

R-CP-12 Multi-tenant isolation

R-CP-12	Multi-tenant isolation
----------------	-------------------------------

Description	The COSIGN CP must enforce suitable virtualization mechanisms to enable the sharing of a common physical network infrastructure among fully isolated connectivity services.
KPIs	<ul style="list-style-type: none"> Given the DCN resources, the number of fully isolated virtual slices (tenants). Usage and performance statistics of the DCN resources for each tenant (virtual slice).
Impact	High. It requires the support of virtualization techniques for the efficient allocation of the shared DCN resources.
Novelty	High. This feature allows maximizing the efficient allocation of the shared DCN resources.
Functionalities	Virtualization of DCN resources isolated virtual slices allocation.
Layer	SDN controller – A-CPI and network applications.
Related DP requirements	This is mainly a CP requirement.

R-CP-13 Easy interoperability with existing cloud management platforms for unified DC control.

R-CP-13 Description	<p>Easy interoperability with existing cloud management platforms for unified DC control.</p> <p>The COSIGN CP should provide powerful APIs, possibly based on the REST concept and HTTP protocol, to enable an easy integration with existing orchestration systems and cloud management platforms adopted to handle the overall DC management. Where relevant, the usage of open, standard interfaces should be preferred to guarantee an easy interoperability.</p>
KPIs	Joint cloud and network management provisioning tool available.
Impact	Medium. Cloud and Network management services are separated items. Usually IT guys are not experts on Network service provisioning too. Therefore, it would be interesting to create a tool which enables to centralize both management systems
Novelty	High. With the new advancement of cloud and network management tools, it has arisen the possibility to achieve such interoperability by exposing cloud management platforms APIs.
Functionalities	Joint cloud and Network management services tool.
Layer	Infrastructure Level – Management and Orchestration layers Infrastructure Level – SDN control Layer.
Related DP requirements	It's not be directly linked to HW

R-CP-14 Integration with external connectivity services (inter-DC)

R-CP-14 Description	<p>Integration with external connectivity services (inter-DC)</p> <p>The COSIGN CP must be able to configure the intra-DC network to efficiently support also the traffic generated among computing resources located in different data centres. This traffic could have various characteristics and requirements, since it could belong to running cloud applications distributed across different sites or it could be generated by management procedures, e.g. for inter-DC content replication.</p> <p>Mechanisms and interfaces for integrated management of intra-DC and inter-DC connectivity should be supported, with reference to different deployment and business models (e.g. inter-DC connectivity offered by an external provider or by the same administrative entity that manages the DC infrastructure).</p>
----------------------------	---

	Open standard interfaces and protocols should be preferred where applicable to enable and simplify the (multi-domain) interoperability.
KPIs	<ul style="list-style-type: none"> E2E network service orchestration tool available. E2E inter-domain Network service delivery with guaranteed QoS.
Impact	High. This feature may enable to control the intra-DC network connectivity and provisioning service but also to coordinate with other connectivity services managed by other NOCs, and agree on specific SLAs to guarantee the support of multi-domain services.
Novelty	Medium. Not directly, but Operator agreements and SLAs are carried out to support the traffic from each other's clients. In this case, it's not proposed to only propose to support network connectivity, but performing such support according to the SLAs of the DC network services.
Functionalities	
Layer	Infrastructure Level – Management and Orchestration layers Infrastructure Level – SDN control Layer.
Related DP requirements	Not be directly linked to HW

R-CP-15 Dynamic DCN reconfiguration for optimization strategies

R-CP-15 Description	<p>Dynamic DCN reconfiguration for optimization strategies</p> <p>The COSIGN CP should support the automated re-planning of already established network services. The automated re-planning will bring the possibility to autonomously re-adapt the resource allocation to the dynamicity of the real-time DC loads, according to global re-optimization criteria. However, DCN re-configuration procedures must avoid any disruption of the existing services.</p>
KPIs	<ul style="list-style-type: none"> Reduction of the total number of SLAs violations indicator. Enhancement of the QoS monitored metrics. Queue congestion reduction at network resources. Better DC network services overall performance.
Impact	Medium. Network resources and services re-planning usually impacts network services performance while dealing with the changes. DC networks resources are commonly over-provisioned, so that re-planning strategies re not very popular among DC network managers, specially to avoid services disruption.
Novelty	Medium. Network services re-planning are already there and usually involves Load balancing techniques or overprovisioning of network resources.
Functionalities	<ul style="list-style-type: none"> Automated service re-planning tool. Automated re-optimization engine based on different (strategic) criteria.
Layer	Infrastructure level: SDN controller – D-CPI. Infrastructure level: Management
Related DP requirements	Not be directly linked to HW.

R-CP-16 CP architecture in support of scalable DCNs and network traffic

R-CP-16 Description	<p>CP architecture in support of scalable DCNs and network traffic</p> <p>The COSIGN CP must be designed to efficiently operate DCNs of different sizes, scaling well with an increasing number of servers and network devices and an increasing amount of intra-DC and inter-DC cloud application and management traffic with flows of different dimension. Scalability is a major concern in the data plane considerations. However, this requirement is here more connected to applications and management traffic. It is more about management than about ports</p>
----------------------------	--

	and links. Scalability can depend on the amount of tenants, deployed applications, users, etc.
KPIs	<ul style="list-style-type: none"> Capacity plan available Total number of SLAs violations indicator. Resources utilization: Percentage of network resources in use.
Impact	High. Properly scaling network service in DCs is fundamental to ensure basic DC services operation in both intra and inter DC environments. It is as simple as if the network do not scale, DC services cannot be provided within the SLA agreed levels, and consequently, “you are out of business”
Novelty	High. Traditionally, the scalability of network services relies on the HW layer. A proper monitoring of network resources together with the intelligence applied at SDN control and management layers may also enable to enhance the scalability of network services.
Functionalities	<ul style="list-style-type: none"> Scalability and performance tool at management or application layer.
Layer	Infrastructure level: SDN controller – D-CPI. Infrastructure level: Management
Related DP requirements	Not be directly linked to HW.

R-CP-17 Scalability

R-CP-17 Description	Scalability The scalability of the CP is a key requirement for the proper operation of the data centre. Therefore, the size (in terms of servers and optical devices to be managed) as well as the expected huge number of traffic flows among servers should not affect the properly working of the CP operation.
KPIs	<ul style="list-style-type: none"> Capacity plan available Total number of SLAs violations indicator. Resources utilization: Percentage of network resources in use.
Impact	High. Properly scaling network service in DCs is fundamental to ensure basic DC services operation in both intra and inter DC environments. It is as simple as if the network do not scale, DC services cannot be provided within the SLA agreed levels, and consequently, “you are out of business”
Novelty	Medium. Network service scalability is a MUST from the very beginning of a DC design. Nevertheless, novel virtualization techniques and the improvement of CP mechanisms enable with new approaches and reduce data center complexity through fewer physical connections. Through virtualization, you get better resource utilization which at the end turns into a better scalability solution.
Functionalities	<ul style="list-style-type: none"> Per network resource optimizer functionality (leaning on virtualization). Per Network optimizer functionality (leaning on virtualization)
Layer	Infrastructure level: SDN controller – D-CPI. Infrastructure level: Management Infrastructure level: HW layer
Related DP requirements	The HW layer must combined with CP techniques must provide to the upper layers with the information to determine the scalability of DC network resources to be able to manage the DC network services.

DATA PLANE/HW LAYER REQUIREMENTS

R-DP-01 Capacity

R-DP-01 Description	Capacity This requirement specifies both the aggregated and the link level DCN capacity. At link level DCN must support 10G to server today and in the near future. In COSIGN horizon, 40G to server links must be considered as well. On an aggregated level, we have to consider the amount of server ports that have to be supported in typical DCs. Few hundred thousands of servers are typical within the world's largest DCs, bringing the aggregated capacity requirement to be considered in COSIGN to millions of Gb/s.
KPIs	<ul style="list-style-type: none"> • data rate supported by server NIC card, switch interface and fibre/cable • switch dimension and port density • bisection bandwidth
Impact	High. The DCN capacity planning would have direct impact on amount of services that the DCN could accommodate (which reflects the cost efficiency) and their performance (e.g., implementation/response time, end-to-end delay).
Novelty	High. In previous DCN design, EPSs with different dimension and capability are structured in a hierarchical way, which causes the fundamental capacity constraints of DCN. By employing fibre with high bandwidth/spectrum efficiency and optical switch with high data forwarding/transmission capability in DCN, this constraints would be tackled in a cost-efficient and power-efficient way.
Functionalities	<ul style="list-style-type: none"> • Network resource utilization monitoring functionality
Layer	Infrastructure layer – Physical.
Related DP requirements	The HW component and topology design must ensure the scalability of DCN.

R-DP-02 Latency

R-DP-02 Description	Latency Depending on the application, very low (microsecond) latencies can be required to some types of traffic, while some other types can thrive with longer (tens of milliseconds) response times. It is therefore of the outmost importance to be able: 1) to provide the lowest possible latencies for the chosen flows and 2) to be able to distinguish the flows requiring the low-latency paths. “Always on” low latency connectivity is crucial. The reasoning for that is that from a data center perspective, it would be valuable to always have “a little bit” of bandwidth available between the nodes, but the bandwidth should also be highly flexible so that it can be adjusted (cranked up or down) with very low latency.
KPIs	<ul style="list-style-type: none"> • Round Trip Time (RTT) and Jitter • Average hop count of server-to-server path • Switching delay (go through the switch)
Impact	High. Latency is a critical QoS guarantee for cloud service/application
Novelty	Medium. Packets suffer from unpredictable delay caused by queuing and congestion in current EPS based DCN design, and reconfiguration time of device and network (e.g., path) Also, topology design flatten way
Functionalities	<ul style="list-style-type: none"> • Per flow based service monitoring functionality
Layer	Infrastructure layer – Physical.
Related DP requirements	The equipment used at the HW layer should ensure guaranteed low latency.

R-DP-03 Reconfigurability/Flexibility

R-DP-03 Description	<p>Reconfigurability/Flexibility</p> <p>Traffic flow characteristics will have a significant impact on the network performance. Most flows are small <10 KB and last only a few 100 of milliseconds, requiring the network to be re-provisioned at a very high rate.</p> <p>Resource usage optimization is required for profitability. Resource optimization from the infrastructure owner perspective can come in conflict with the optimization goals of the deployed services. For example, workload optimizers tend to increase the amount of instances when the service experiences a peak in demand; for that it might be required to power on standby servers. Taking into account the wear and tear of frequent power on and power down operations is typically not part of the consideration of the workload manager, although it can be of utmost importance to the infrastructure operator.</p>
KPIs	<ul style="list-style-type: none"> • Path (e.g., bandwidth) provision flexibility and time efficiency • Switch reconfiguration time • Service/traffic blocking rate
Impact	Medium. The reconfigurability and flexibility of DCN would significantly influence its service/traffic accommodation capability, since the traffic in data center (between ToRs and servers) varies quickly in time and space domain.
Novelty	Medium. Through employing large scale optical switch, fast optical switch and spatial division multiplexing (SDM) based fibers (e.g., MEF, MCF), the dimension of network resource and end-to-end path provision will be increased significantly (e.g., hybrid SDM, TDM/OPS connection).
Functionalities	<ul style="list-style-type: none"> • Underlay (physical layer) resource utilization/performance monitoring • Flexible end-to-end path provision functionality
Layer	Infrastructure layer – Physical. Infrastructure level – CP layer.
Related DP requirements	It is required to have flexible configurable paths.

R-DP-04 Resiliency and HA

R-DP-04 Description	<p>Resiliency and HA</p> <p>DCN data plane need provide high service availability and minimize the amount of systemic downtime events, i.e. it is required to have <i>n</i> fully redundant network paths between each pair of endpoints.</p>
KPIs	<ul style="list-style-type: none"> • Amount of disjoint path between end points (ToRs or servers) • Component failure (e.g., link or switch port) awareness time
Impact	High. An interruption of just seconds to normal data access can result in enormous cost to the business and if lengthy, may impact it to such a degree that it cannot recover. By building resilience into the DCN infrastructure, the risk of service interruption could be reduced.
Novelty	Medium. In DCN structure design, the infrastructure resiliency should be considered properly to recover from hardware layer failure. And a lot of previous research on survivable optical network and DCN design could be refereed.
Functionalities	<ul style="list-style-type: none"> • Failure recovery functionality
Layer	Infrastructure layer – Physical.
Related DP requirements	It is required to have fully redundant network paths between each pair of endpoints. This is more related with the topology.

requirements	
---------------------	--

R-DP-05 Traffic isolation

R-DP-05 Description	Traffic isolation DCN data plane should be capable of isolating the traffic on the prescribed granularity – workload owner, application, application transaction, application tier, etc. In addition to the physical isolation, the management and the performance isolation must be provided. Isolation here read more like a logical request (virtual) then a physical request. But there is there also a requirement for physical isolation of parts of the data plane in the DC. For instance, physical isolation can be required in some cases (e.g. where we do not use overlays). This can be ensured by fully isolated paths, by using multiple cores in fibers, different wavelengths, etc.
KPIs	<ul style="list-style-type: none"> • Dimension of network resources (spatial, time, spectrum) • Granularity of resource allocation
Impact	High. Physical network isolation (e.g., path isolation) could provide a more trustable traffic isolation to support multi-tenant cloud service.
Novelty	High. SDM technology and optical switches with different features could provide different scale physical network isolation. Comparing with overlay based traffic isolation, it could provide more privacy, security, and robustness to isolation failure to client.
Functionalities	<ul style="list-style-type: none"> • Physical network isolation functionality • Combined overlay-based and underlay (physical)-based network virtualization
Layer	Infrastructure level – CP layer Infrastructure level – Physical layer
Related DP requirements	Physical isolation might be required in some cases (e.g. where we do not use overlays). This can be ensured by fully isolated paths, by using multiple cores in fibers, different wavelengths, etc.

R-DP-06 Scalability and Extensibility

R-DP-06 Description	Scalability and Extensibility DCN data plane should support large-scale data centers and allow the existing data center to grow organically, both in number of servers, in number of the deployed workloads, supported amount of traffic, etc.
KPIs	<ul style="list-style-type: none"> • Performance/cost linearity to involve more servers/switches • Topology/structure stability for involve more servers/switches
Impact	High. The DCN scalability implicates the DCN performance stability (e.g., latency) when extension happens, as well as the cost efficiency.
Novelty	High. The DCN design with optical switches should be investigated to better utilize the scalability of optical switch dimension (e.g., spatial, spectrum) and the capability of large scale optical switch.
Functionalities	<ul style="list-style-type: none"> • DCN structure extension functionality
Layer	Infrastructure layer – Physical.
Related DP requirements	The scalable structure design should allow an easy way to extend with modular subsystem, as well guarantee its flexibility.