



Grant Agreement number: **248095**
Project acronym: **Q-ESSENCE**
Project title: **Quantum Interfaces, Sensors, and Communication based on Entanglement**
Funding Scheme: **Collaborative Project (Large-Scale Integrating Project)**



DELIVERABLE REPORT

Deliverable no.:	D3.1.1
Deliverable name:	Report on and demonstration of a high-speed entanglement source in the continuous-variable regime
Workpackage no.	WP 3.1
Lead beneficiary	LUH
Nature	R
Dissemination level	PU
Delivery date from Annex I (proj month)	31/01/2012
Actual / forecast delivery date	31/01/2012
Status	Submitted

The regime of Gaussian continuous variables (CV) offers high speeds, i.e. high rates, for the distribution of entangled systems. The appropriate light source is an optical parametric amplifier that produces squeezed vacuum states of light over a broad bandwidth. In Q-ESSENCE (work package 3.1) we aimed for the unprecedented entanglement bandwidth of greater 1 GHz. The appropriate entanglement detector is a pair of balanced homodyne detectors that is shot-noise limited over at least the same high bandwidth.

Within work package 3.1 the partner LUH realized the required light source and observed a squeezing bandwidth of greater 2GHz [ASM1-12]. Entanglement distribution was realized by mixing the squeezed mode with a vacuum mode on a beam splitter. The entanglement was characterized by the measurement of quadrature amplitude co-variances, which fulfilled Duan's entanglement criterion [L.M. Duan, G. Giedke, J. I. Cirac, P.Zoller, Phys. Rev. Lett. **84**, 2722 (2000)]. Both balanced homodyne detectors had a bandwidth of about 2GHz. With this results milestone M3.1.4 has been fully achieved.

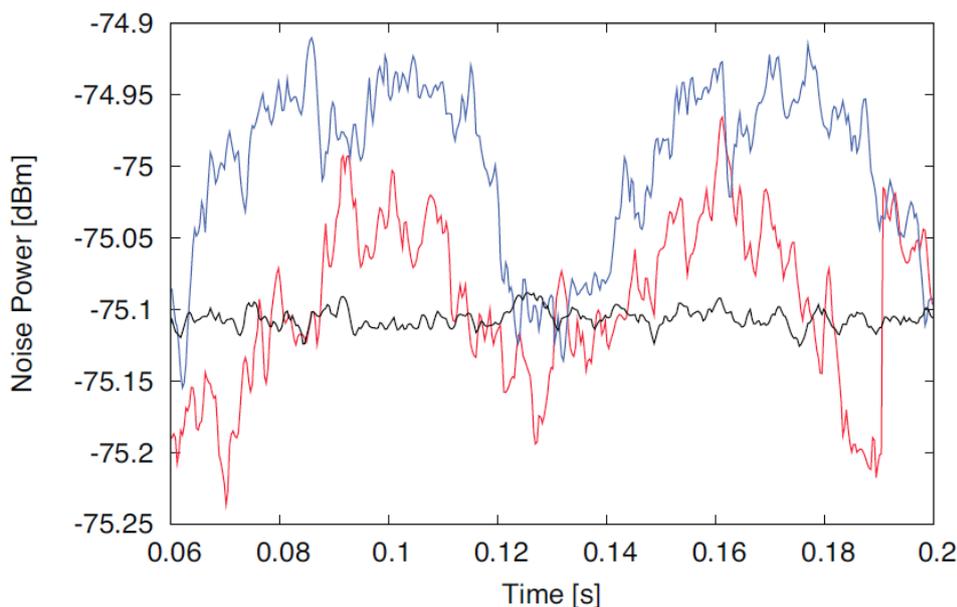


Figure 1. Characterization of distributed entanglement at a sideband frequency of 1GHz. Details are given in the text.

The new light source developed at LUH produces Gaussian CV continuous-wave squeezed light at 1550nm. It is a parametric down-conversion source based on periodically poled potassium titanyl phosphate crystal (PPKTP). The source does not exploit any resonant enhancement for the fundamental wavelength. This concept should allow the production of squeezed light within the phase-matching bandwidth of several nanometers. The spatial mode of the squeezed light is defined by the spatial mode of the cavity-enhanced second harmonic pump field. We measured the squeezing to be up to 0.3 dB below the vacuum noise from 50MHz to 2GHz limited by the measuring bandwidth of the homodyne detector. The results are summarized in a submitted manuscript [ASM1-12]. In subsequent work, which goes beyond the above manuscript, we set up a second balanced homodyne detector with 2GHz bandwidth. The squeezed mode was split on a balanced beam splitter and the amplitude and phase quadrature amplitudes (X_1 and X_2) were measured by the two homodyne detectors A and B. Their co-variances fulfilled the entanglement criterion by Duan and co-workers cited above. Fig. 1 shows an example of measured co-variances that prove distributed entanglement. The curves show three co-variances at sideband frequency 1GHz. For all three traces, the quadrature amplitude at one detector was fixed to either X_1 or X_2 , while the quadrature amplitude angle φ measured at the second detector was scanned. The curve with the lowest dips shows the variance of $(X_{1,A} + X_{\varphi,B})$. For $\varphi = 0$ squeezing was

visible. The curve with the highest values shows the variance of $(X_{2,A} - X_{\varphi,B})$. For $\varphi = \pi/2$ vacuum noise was detected. When the detectors were set to these minima, entanglement was distributed. The horizontal trace corresponds to the vacuum reference level, which was measured with a blocked signal input of the balanced homodyne detectors.

References

[ASM1-12] S. Ast, A. Samblowski, M. Mehmet, S. Steinlechner, T. Eberle, and R. Schnabel, *Continuous-wave non-classical light with GHz squeezing bandwidth*, arXiv:1201.5289 (2012).

Continuous-wave non-classical light with GHz squeezing bandwidth

Stefan Ast¹, Aiko Sambrowski¹, Moritz Mehmet^{1,2}, Sebastian Steinlechner¹, Tobias Eberle^{1,2} and Roman Schnabel^{1,*}

¹Max-Planck-Institute for Gravitational Physics, Albert-Einstein-Institute, and Institut für Gravitationsphysik, Leibniz Universität Hannover, Callinstrasse 38, D-30167 Hannover, Germany

²Centre for Quantum Engineering and Space-Time Research - QUEST, Leibniz Universität Hannover, Welfengarten 1, 30167 Hannover, Germany

*Corresponding author: roman.schnabel@aei.mpg.de

Compiled January 26, 2012

Squeezed states can be employed for entanglement-based continuous-variable quantum key distribution, where the secure key rate is proportional to the bandwidth of the squeezing. We produced a non-classical continuous-wave laser field at the telecommunication wavelength of 1550 nm, which showed squeezing over a bandwidth of more than 2 GHz. The experimental setup used parametric down-conversion via a periodically poled potassium titanyl phosphate crystal (PPKTP). We did not use any resonant enhancement for the fundamental wavelength, which should in principle allow a production of squeezed light over the full phase-matching bandwidth of several nanometers. We measured the squeezing to be up to 0.3 dB below the vacuum noise from 50 MHz to 2 GHz limited by the measuring bandwidth of the homodyne detector. The squeezing strength was possibly limited by thermal lensing inside the non-linear crystal. © 2012 Optical Society of America

OCIS codes: 270.6570

Squeezed states of light are non-classical states, capable of being the resource for entanglement generation in the continuous variable (CV) regime [1–5]. Possible approaches are to either overlap two independent squeezed modes on a beam splitter, or mix single-mode squeezing with vacuum. The quadratures of the beam splitter’s outputs will then be entangled being an effective toolbox for quantum key distribution (QKD) [6–8]. The data rate for entanglement based QKD with squeezed states increases with the squeezing strength and is proportional to the squeezing bandwidth. While the first increases the average number of bits per measurement, the latter will allow a higher measuring speed. Thus both increase the key rate. One approach for applications of QKD is the distribution of continuous-wave CV entangled states via standard telecom fibers [9,10]. Here, the wavelength of 1550 nm is advantageous since it offers low optical loss, which is necessary to protect the entanglement against decoherence [11]. In a km scale fiber network, however, decoherence will still be the limiting factor and the squeezing bandwidth is more robust than the squeezing strength.

The generation of squeezed states of light has first been demonstrated in 1985 by Slusher *et al.* [12]. Today, a common method to produce continuous-wave squeezing is parametric down-conversion in second-order nonlinear crystals placed inside optical resonators [13,14]. The resonator enhances the fundamental field to be squeezed, allowing non-classical noise suppressions of more than 10 dB in recent experiments [15–17], but also limits its bandwidth. The highest bandwidth for continuous-wave squeezed light so far was measured in [16] where 100 MHz and a non-classical noise suppression of up to 11.5 dB was achieved.

In the work presented here, no resonant enhancement

of the fundamental wavelength was used. The squeezing bandwidth was thus limited by the phase-matching condition of the non-linear crystal. The consequences are a very high pump threshold for parametric oscillation and small squeezing factors achievable. We partially compensated the absence of the resonator at the fundamental wavelength by resonantly enhancing the pump light instead. As the result we present the first measurement of a continuous-wave squeezed vacuum state with 2 GHz bandwidth. The non-classical noise suppression was up to 0.3 dB below shot noise. Note that in the regime of squeezed laser *pulses* [18,19] enhancement resonators are generally not necessary and also GHz squeezing bandwidths are possible, however, not demonstrated so far to the best of our knowledge.

In the experimental setup (Fig. 1) 1550 nm continuous-wave light from an erbium-doped fiber laser was used. First, the laser light was transmitted through a three mirror ring resonator for spatial mode cleaning. 1.1 W were mode-matched into a second harmonic generation (SHG) cavity containing a PPKTP crystal. We used the SHG cavity described in [20], which converted 95 % of the 1550 nm laser light into 775 nm pump light for the squeezing resonator.

The squeezed-light source used another PPKTP crystal having a dimension of $1 \times 2 \times 9.3 \text{ mm}^3$ and a quasi phase-matching temperature of about 46 °C. Its one end surface had a radius of curvature of $\text{RoC} = 12 \text{ mm}$ and a highly reflective coating ($\text{HR} = 99.95 \%$) for fundamental as well as for the harmonic wavelength. The crystal’s other surface was plano and anti-reflective coated ($\text{AR} < 0.1 \%$) to minimize intra-cavity loss. A curved mirror ($\text{RoC} = 25 \text{ mm}$) with reflectivities $R_{1550} < 1 \%$ and $R_{775} = 98.5 \%$ was placed 24 mm in front of the crystal, leading to a free spectral range of

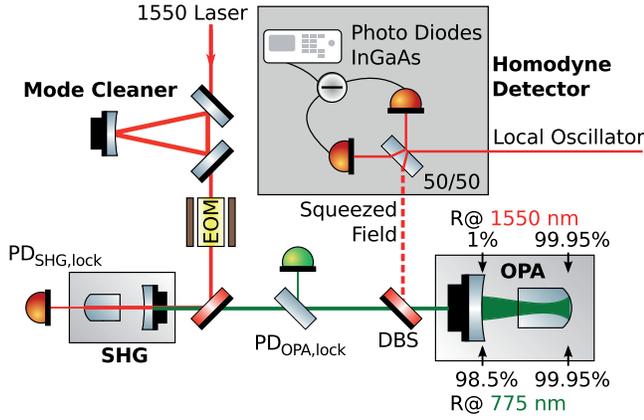


Fig. 1. Schematic of the experimental setup. Mode Cleaner: three mirror spatial filter cavity; SHG: second harmonic generation cavity with nonlinear PPKTP crystal; OPA: squeezing resonator with nonlinear PPKTP crystal and high squeezing bandwidth; DBS: dichroic beam splitter to separate 775 nm and 1550 nm light; $PD_{SHG/OPA,lock}$: photo detector measuring error signals for cavity length stabilization with 138 MHz demodulation frequency; EOM: electro-optic modulator producing sidebands of 138 MHz for the cavity length stabilization.

3.67 GHz. The crystal’s end surface and the external mirror formed the linear cavity with a Finesse of about $\mathcal{F}_{775} = 350$ for the harmonic pump field. We stabilized the squeezing resonator length with the pump field by using a Pound Drever Hall (PDH) scheme. Here the phase modulation applied before the SHG was down-converted and used to generate an error signal. Due to the high Finesse at the pump wavelength, an intra-cavity pump power of up to 30 W was achieved limited by thermal lensing inside the crystal. The waist size without thermal lensing was $w_{0,775} = 27 \mu\text{m}$. The maximum pump power was still far below the threshold for optical parametric oscillation (of about 1 kW), thus limiting the achievable squeezing.

Our balanced homodyne detector (BHD) consisted of two FCI-H250G-InGaAs-70 (*OSI Optoelectronics*) photo detectors with built-in transimpedance amplifiers, which allowed us to measure up to 2 GHz. A subtraction of the measured signals was achieved via commercially available power splitters within a frequency range of 50 MHz to 1 GHz and of 1 GHz to 2 GHz, respectively. The detector’s dark noise clearance at 0.75 mW local oscillator power was about 8 dB over a frequency range of several hundred MHz, which slowly degraded to 2 dB at 2 GHz (Fig. 2). Several electronic pick-up peaks showed up in the homodyne detector’s dark noise and the shot noise. There are modulation peaks from the PDH locking frequencies at 101 MHz, 138 MHz as well as their harmonics. The peaks between 1 GHz and 2 GHz can be seen in the detector dark noise and correspond to external electronic pick up noise. The homodyne detector spectrum was linear at a local oscillator (LO)

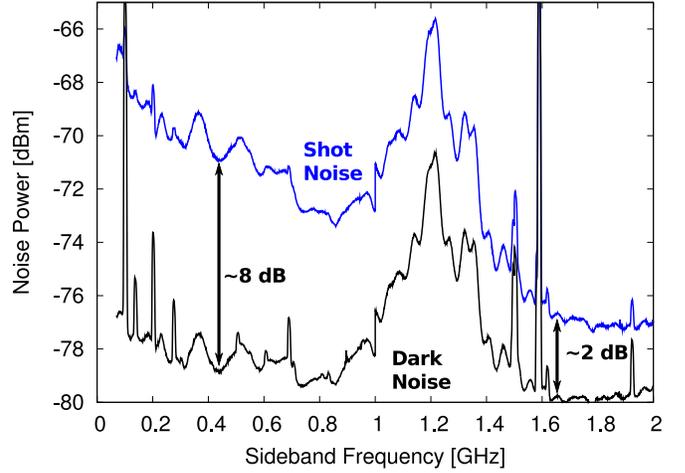


Fig. 2. Balanced homodyne detector characterization from 50 MHz to 2 GHz. Top: Homodyne detector shot noise at 0.75 mW local oscillator power. Bottom: Homodyne detector dark noise. The dark noise distance is ranging from about 9 dB at 50 MHz, 8 dB at 500 MHz, and slowly degrading to about 2 dB at 2 GHz.

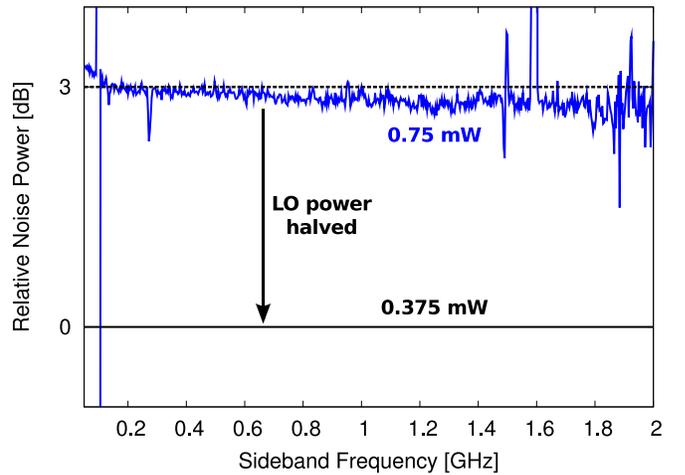


Fig. 3. Measurement of the homodyne detector’s linearity. Homodyne detector shot noise levels at 0.75 mW (top) and 0.375 mW (bottom) local oscillator (LO) powers normalized to the latter. At these LO power levels the homodyne detector’s spectrum is linear since halving the LO power results in a 3 dB reduction of the shotnoise. The small saturation effect towards higher frequencies is negligible for our experiment.

power of up to 0.75 mW (Fig. 3). Saturation effects start to appear above 0.7 GHz as the curve is slightly lower than 3 dB. This did not affect the measured squeezing, since the LO was always shot-noise limited at such low powers and high frequencies.

We measured a squeezing level of 0.3 dB and anti-squeezing of 0.5 dB from 50 MHz to 2 GHz using an (intra-cavity) harmonic pump power of about 30 W and a LO power of 0.75 mW (Fig. 4). The peaks in the normalized spectrum also arise in the detector’s dark

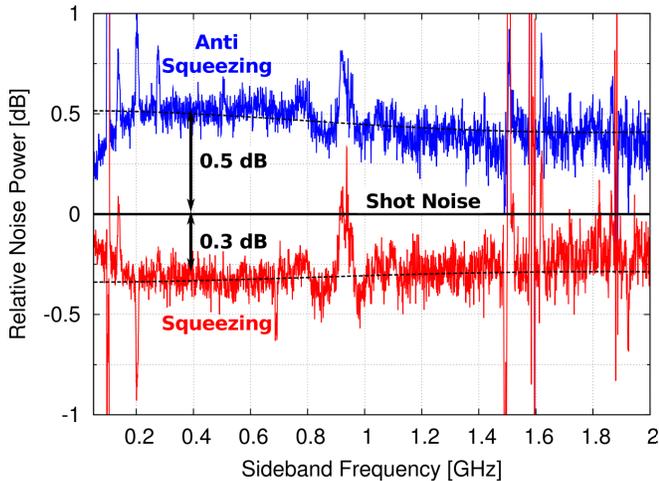


Fig. 4. Quantum noise spectra normalized to shot noise. The dashed lines correspond to numerical simulations of our system, respectively. A non-classical noise suppression (squeezing) of up to 0.3 dB and 0.5 dB of anti-squeezing are observed from 0.05-2 GHz. The local oscillator power was 0.75 mW and the intra-cavity harmonic pump power was about 30 W.

noise and can be associated with electronic pick-up noise. The squeezing strength is mainly limited by insufficient pump power far below the parametric oscillation threshold. When we further increased the input pump power, we did not observe a corresponding increase of the intra-cavity pump power. Neither did the cavity transmitted light power increase nor did the squeezing factor improve. From these observations we conclude that thermal lensing inside the crystal reduced the spatial overlap between the pump field and the fundamental field being mode-matched to the BHD.

In conclusion, we produced a continuous-wave squeezed vacuum field with a measured squeezing bandwidth of 2 GHz. Our result serves as a proof of principle experiment for the generation of a GHz bandwidth two-mode squeezed states for high-speed entanglement-based QKD. The bandwidth of our squeezing source was possibly only limited by the crystal’s phase-matching bandwidth, however, the actually observed squeezing spectrum was considerably narrower and limited by the 2 GHz detection bandwidth of the homodyne detector. The measured squeezing strength was just up to 0.3 dB below shot noise, which is too low for efficient entanglement-based QKD. The conclusion from our experiment is thus to find a trade-off between the bandwidth and squeezing strength of the source. This trade-off can be realized by applying an enhancement resonator with a large linewidth of several GHz at the fundamental wavelength. First numerical simulations indicate that a low-finesse PPKTP standing-wave resonator of a few millimeter length should provide more than 3 dB of squeezing over a 1 GHz bandwidth.

We acknowledge support from the International Max Planck Research School on Gravitational Wave Astronomy and the EU FP 7 project Q-ESSENCE. The authors like to thank Henning Kaufer, Oliver Gerberding and Vitus Händchen for useful discussions.

References

1. H. Yuen and J. Shapiro, *Information Theory*, IEEE Transactions on **24**, 657 (1978).
2. Z. Y. Ou, S. F. Pereira, H. J. Kimble, and K. C. Peng, *Phys. Rev. Lett.* **68**, 3663 (1992).
3. T. C. Ralph, *Phys. Rev. A* **61**, 010303 (1999).
4. W. P. Bowen, R. Schnabel, P. K. Lam, and T. C. Ralph, *Phys. Rev. Lett.* **90**, 043601 (2003).
5. J. DiGuglielmo, B. Hage, A. Franzen, J. Fiurásek, and R. Schnabel, *Physical Review A* **76**, 012323 (2007).
6. C. Rodò, O. Romero-Isart, K. Eckert, and A. Sanpera, *Open Syst. Inf. Dyn.* **14**, 69 (2007).
7. X. Su, W. Wang, Y. Wang, X. Jia, C. Xie, and K. Peng, *EPL* **87**, 20005 (2009).
8. F. Furrer, T. Franz, M. Berta, V. B. Scholz, M. Tomamichel, and R. F. Werner, “Continuous variable quantum key distribution: Finite-key analysis of composable security against coherent attacks”, ArXiv:1112.2179v1.
9. J. Lodewyck, M. Bloch, R. García-Patrón, S. Fossier, E. Karpov, E. Diamanti, T. Debuisschert, N. J. Cerf, R. Tualle-Brouri, S. W. McLaughlin, and P. Grangier, *Phys. Rev. A* **76**, 042305 (2007).
10. M. Mehmet, T. Eberle, S. Steinlechner, H. Vahlbruch, and R. Schnabel, *Opt. Lett.* **35**, 1665 (2010).
11. R. García-Patrón and N. J. Cerf, *Phys. Rev. Lett.* **102**, 130501 (2009).
12. R. E. Slusher, L. W. Hollberg, B. Yurke, J. C. Mertz, and J. F. Valley, *Phys. Rev. Lett.* **55**, 2409 (1985).
13. B. Yurke, *Phys. Rev. A* **29**, 408 (1984).
14. L.-A. Wu, H. J. Kimble, J. L. Hall, and H. Wu, *Phys. Rev. Lett.* **57**, 2520 (1986).
15. H. Vahlbruch, M. Mehmet, S. Chelkowski, B. Hage, A. Franzen, N. Lastzka, S. Goßler, K. Danzmann, and R. Schnabel, *Phys. Rev. Lett.* **100**, 033602 (2008).
16. M. Mehmet, H. Vahlbruch, N. Lastzka, K. Danzmann, and R. Schnabel, *Phys. Rev. A* **81**, 013814 (2010).
17. T. Eberle, S. Steinlechner, J. Bauchrowitz, V. Händchen, H. Vahlbruch, M. Mehmet, H. Müller-Ebhardt, and R. Schnabel, *Phys. Rev. Lett.* **104**, 251102 (2010).
18. R. E. Slusher, P. Grangier, A. LaPorta, B. Yurke, and M. J. Potasek, *Phys. Rev. Lett.* **59**, 2566 (1987).
19. R. Dong, J. Heersink, J. F. Corney, P. D. Drummond, U. L. Andersen, and G. Leuchs, *Opt. Lett.* **33**, 116 (2008).
20. S. Ast, R. M. Nia, A. Schönbeck, N. Lastzka, J. Steinlechner, T. Eberle, M. Mehmet, S. Steinlechner, and R. Schnabel, *Opt. Lett.* **36**, 3467 (2011).